



Test Report: HBG-240-36

240W Constant Voltage + Constant Current LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test

DESIGN VERIFY TEST



OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	21.6 V~ 36 V	I/P: 230VAC O/P: LED MODE Ta: 25°C	21.6V~ 36 V
2	OUTPUT CURRENT ADJUST RANGE (For A-Type)	4A~6.7A	I/P: 230VAC O/P: SETING Ta: 25°C	3.724A~6.575A
3	OUTPUT VOLTAGE TOLERANCE	-2%~+2%	I/P: 90VAC / 305VAC O/P: FULL/ NO LOAD Ta: 25°C	-0.120%~ 0.100%
4	LINE REGULATION	-0.5%~+0.5%	I/P: 90VAC ~ 305VAC O/P: 80% ~ FULL LOAD Ta: 25°C	-0.120%~ 0.100 %
5	LOAD REGULATION	-0.5%~+0.5%	I/P: 230VAC O/P: FULL/ NO LOAD Ta: 25°C	-0%~ 0.025%
6	OVER/UNDERSHOOT TEST	<± 5 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	<5 %
7	RIPPLE & NOISE (Max)	250mVp-p	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	40 mVp-p
8	SET UP TIME(Max)	230VAC/ 500ms 115VAC/ 2500ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 444 ms 115VAC/ 1623 ms
9	RISE TIME (Max)	230VAC/ 120ms 115VAC/ 120ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 39.11ms 115VAC/ 39.05 ms
10	HOLD UP TIME(Typ)	230VAC/ 15ms 115VAC/ 15ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 33.53 ms 115VAC/ 32.51 ms
11	DYNAMIC LOAD	V1: 3600 mVp-p	I/P: 230VAC O/P: (1) FULL/50% LOAD 50%DUTY / 120HZ (2) FULL /50% LOAD 50%DUTY / 1KHZ Ta: 25°C	(1) 1940mVp-p (2) 1930mVp-p



12 DIMMING OPERATION (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)



⊙ Applying additive 1 ~ 10VDC

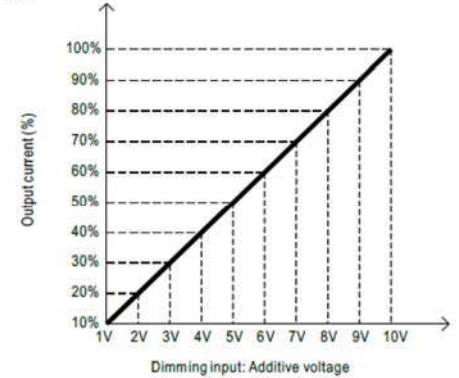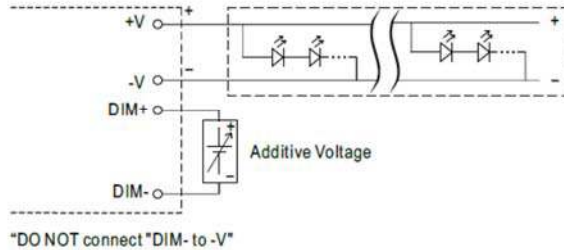

⊙ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

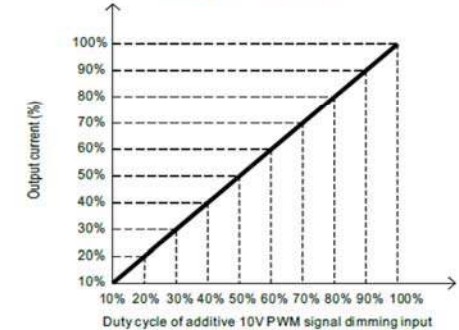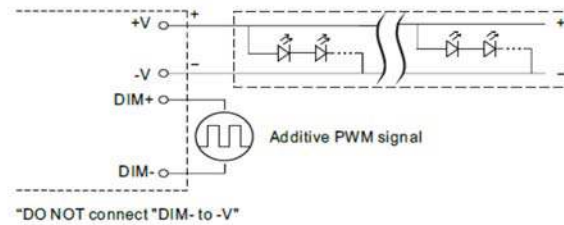

⊙ Applying additive resistance:

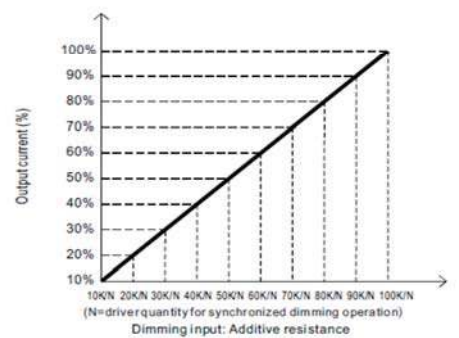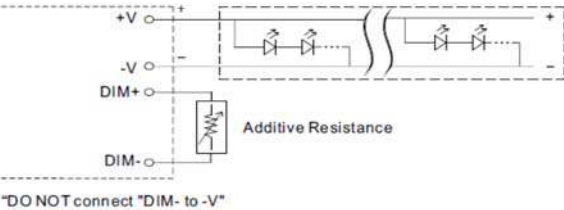

I/P: 230 VAC

O/P: DIMMING TEST

Ta: 25 $^{\circ}$ C

	DIMMING	Short	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V
1	Output Current	0	0.564A	1.310A	1.988A	2.704A	3.423A	4.118A	4.772A	5.417A	6.123A	6.645A
	%	0%	8.42%	19.55%	29.67%	40.36%	51.09%	61.46%	71.22%	80.85%	91.39%	99.18%
	PWM(100Hz)	0V	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
2	Output Current	0	0.592A	1.276A	1.980A	2.672A	3.359A	4.027A	4.676A	5.353A	5.978A	6.577A
	%	0%	8.84%	19.04%	29.55%	39.88%	50.13%	60.10%	69.79%	79.90%	89.22%	98.16%
	R	0%	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K
3	Output Current	0	0.529A	1.223A	1.927A	2.627A	3.312A	3.961A	4.665A	5.318A	5.938A	6.540A
	%	0%	7.90%	18.25%	28.76%	39.21%	49.43%	59.12%	69.63%	79.37%	88.63%	97.61%

TEST RESULT: OK


13	DALI DIMMING OPERATION (primary side; for DA-Type)	※DALI Interface ·Apply DALI signal between DA+ and DA-. ·DALI protocol comprises 16 groups and 64 addresses. ·First step is fixed at 8% of output. I/P: 230 VAC O/P: DIMMING TEST Ta: 25℃ TEST RESULT: OK
----	---	--




INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305VAC	I/P: TESTING O/P: 80% ~FULL LOAD Ta: 25℃ (1)I/P: LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P: 80% ~FULL LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	87 V~ 305 V TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~305 VAC O/P: FULL ~NO LOAD Ta: 25℃	TEST: OK
3	AC CURRENT	2.5A/115VAC 1.3A/230VAC 1.2A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25℃	I = 2.31 A/ 115VAC I = 1.14 A/ 230VAC I = 0.99 A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25℃	L-FG: 0.371 mA N-FG: 0.378 mA
5	INRUSH CURRENT(Typ)	230V/ 75A Twidth =680us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25℃	I = 46.8 A/ 230VAC Twidth =515 us

INPUT=230VAC/50HZ @ FULL LOAD

CH2: Input current CH1: AC Input Voltage

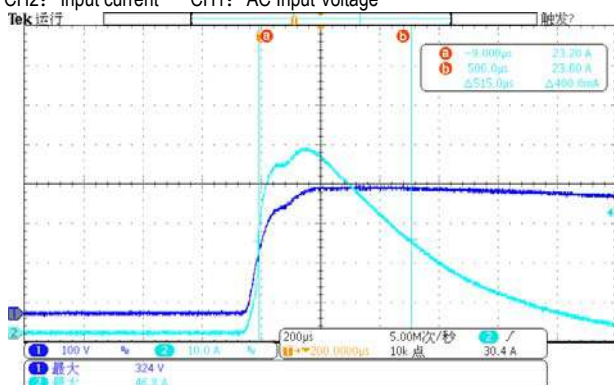

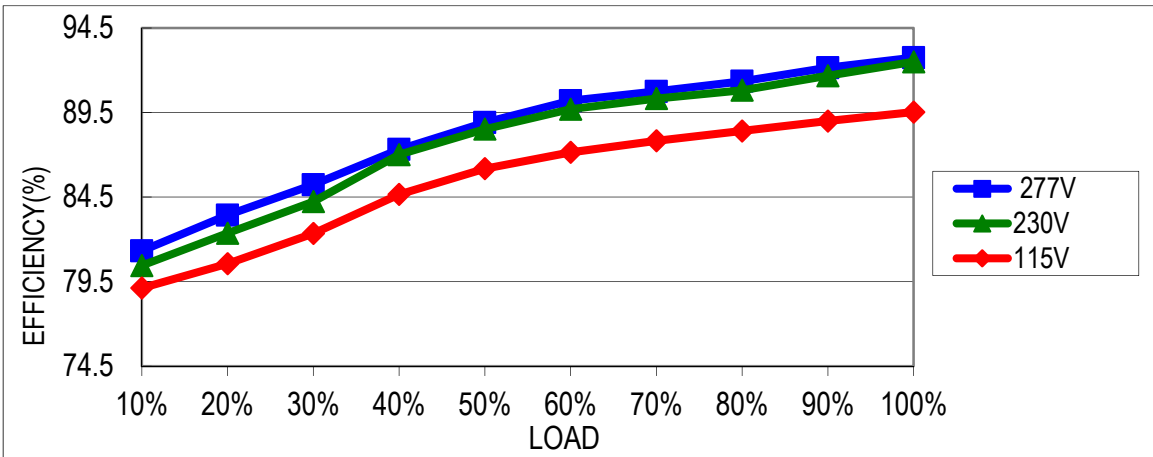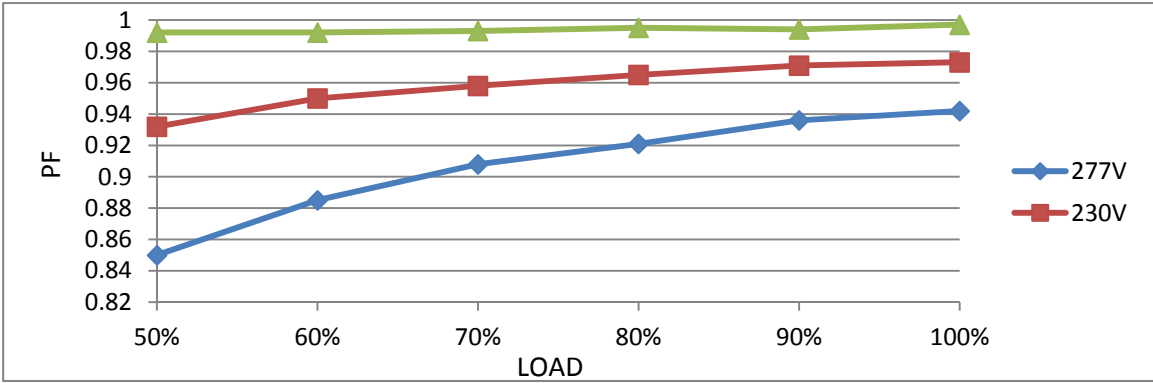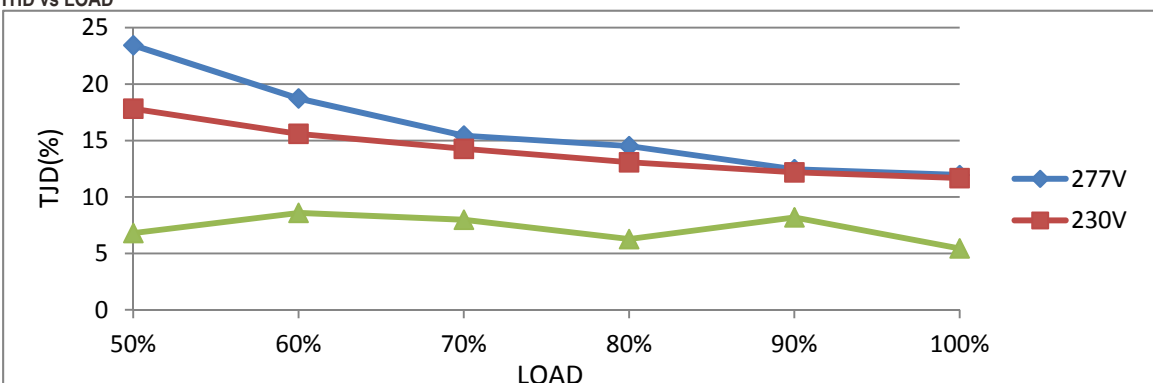6	EFFICIENCY(Typ)	92.5%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	93.25%																																												
EFFICIENCY vs LOAD <table><thead><tr><th>LOAD</th><th>277V</th><th>230V</th><th>115V</th></tr></thead><tbody><tr><td>10%</td><td>81.5</td><td>80.5</td><td>79.5</td></tr><tr><td>20%</td><td>83.5</td><td>82.5</td><td>81.5</td></tr><tr><td>30%</td><td>85.5</td><td>84.5</td><td>83.5</td></tr><tr><td>40%</td><td>87.5</td><td>86.5</td><td>85.5</td></tr><tr><td>50%</td><td>89.5</td><td>88.5</td><td>87.5</td></tr><tr><td>60%</td><td>91.5</td><td>90.5</td><td>89.5</td></tr><tr><td>70%</td><td>92.5</td><td>91.5</td><td>90.5</td></tr><tr><td>80%</td><td>93.5</td><td>92.5</td><td>91.5</td></tr><tr><td>90%</td><td>94.5</td><td>93.5</td><td>92.5</td></tr><tr><td>100%</td><td>95.5</td><td>94.5</td><td>93.5</td></tr></tbody></table>					LOAD	277V	230V	115V	10%	81.5	80.5	79.5	20%	83.5	82.5	81.5	30%	85.5	84.5	83.5	40%	87.5	86.5	85.5	50%	89.5	88.5	87.5	60%	91.5	90.5	89.5	70%	92.5	91.5	90.5	80%	93.5	92.5	91.5	90%	94.5	93.5	92.5	100%	95.5	94.5	93.5
LOAD	277V	230V	115V																																													
10%	81.5	80.5	79.5																																													
20%	83.5	82.5	81.5																																													
30%	85.5	84.5	83.5																																													
40%	87.5	86.5	85.5																																													
50%	89.5	88.5	87.5																																													
60%	91.5	90.5	89.5																																													
70%	92.5	91.5	90.5																																													
80%	93.5	92.5	91.5																																													
90%	94.5	93.5	92.5																																													
100%	95.5	94.5	93.5																																													
7	POWER FACTOR	0.98/ 115VAC 0.95/ 230VAC 0.93/ 277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF= 0.997 / 115VAC PF= 0.973 / 230VAC PF= 0.942 / 277VAC																																												
P.F vs LOAD <table><thead><tr><th>LOAD</th><th>277V</th><th>230V</th><th>115V</th></tr></thead><tbody><tr><td>50%</td><td>0.85</td><td>0.93</td><td>1.00</td></tr><tr><td>60%</td><td>0.88</td><td>0.95</td><td>1.00</td></tr><tr><td>70%</td><td>0.91</td><td>0.96</td><td>1.00</td></tr><tr><td>80%</td><td>0.92</td><td>0.97</td><td>1.00</td></tr><tr><td>90%</td><td>0.94</td><td>0.98</td><td>1.00</td></tr><tr><td>100%</td><td>0.95</td><td>0.98</td><td>1.00</td></tr></tbody></table>					LOAD	277V	230V	115V	50%	0.85	0.93	1.00	60%	0.88	0.95	1.00	70%	0.91	0.96	1.00	80%	0.92	0.97	1.00	90%	0.94	0.98	1.00	100%	0.95	0.98	1.00																
LOAD	277V	230V	115V																																													
50%	0.85	0.93	1.00																																													
60%	0.88	0.95	1.00																																													
70%	0.91	0.96	1.00																																													
80%	0.92	0.97	1.00																																													
90%	0.94	0.98	1.00																																													
100%	0.95	0.98	1.00																																													
8	TOTAL HARMONIC DISTORTION	THD<20% (@load≥60%/115VAC, 230VAC; @load≥80%/277VAC)	I/P: 115 VAC/60% LOAD I/P: 230 VAC/60% LOAD I/P: 277 VAC/80% LOAD Ta: 25°C	THD=5.44% @60% load /115VAC THD=11.67% @60% load /230VAC THD=11.94% @80% load /277VAC																																												
THD vs LOAD <table><thead><tr><th>LOAD</th><th>277V</th><th>230V</th><th>115V</th></tr></thead><tbody><tr><td>50%</td><td>23.5</td><td>18.0</td><td>6.5</td></tr><tr><td>60%</td><td>18.5</td><td>15.5</td><td>8.5</td></tr><tr><td>70%</td><td>15.5</td><td>14.0</td><td>7.5</td></tr><tr><td>80%</td><td>14.5</td><td>13.0</td><td>6.0</td></tr><tr><td>90%</td><td>12.5</td><td>12.0</td><td>8.0</td></tr><tr><td>100%</td><td>12.0</td><td>11.5</td><td>5.5</td></tr></tbody></table>					LOAD	277V	230V	115V	50%	23.5	18.0	6.5	60%	18.5	15.5	8.5	70%	15.5	14.0	7.5	80%	14.5	13.0	6.0	90%	12.5	12.0	8.0	100%	12.0	11.5	5.5																
LOAD	277V	230V	115V																																													
50%	23.5	18.0	6.5																																													
60%	18.5	15.5	8.5																																													
70%	15.5	14.0	7.5																																													
80%	14.5	13.0	6.0																																													
90%	12.5	12.0	8.0																																													
100%	12.0	11.5	5.5																																													

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	95%~108%	I/P: 90VAC I/P: 230VAC I/P: 305VAC O/P: TESTING Ta: 25°C	100.49 %/ 90VAC 100.52 %/ 230VAC 100.67 %/ 305VAC Constant Current Limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	43V~52V	I/P: 90VAC I/P: 230VAC I/P: 305VAC O/P: NO LOAD Ta: 25°C	47.4 V/ 90VAC 47.4 V/ 230VAC 47.4V/ 305VAC Shut down and latch off o/p voltage ,re-power on to removed
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230VAC O/P: FULL LOAD	O.T.P. Active Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q3 Rated 600V/20A	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 470 V (2) 456 V (3) 454 V
2	O/P Diode (MOSFET)	Q101 Rated 150 V/ 43A	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1)127 V (2)45.2 V (3)100 V
3	Input Capacitor	C5 Rated 150u/450V	I/P: High-Line +3V =308 V O/P: (1) FULL LOAD input on/off (2) NO LOAD input on /Off (3) FULL LOAD /NO LOAD Change Ta: 25°C	(1) 448 V (2) 440 V (3) 442 V
4	Control IC	U70 Rated 16V (MAX.)	I/P: High-Line +3V =308 V O/P: (1) FULL LOAD (2) NO LOAD input on /Off (3) FULL LOAD /NO LOAD Change Ta: 25°C	(1) 15.4 V (2) 15.4 V (3) 15.2 V
5	PFC Power Transistor	Q 1 Rated 600V/20.2A	I/P: High-Line +3V =308V O/P: (1) FULL LOAD Turn on (2) Output Short (3) FULL LOAD continue Ta: 25°C	(1) 546 V (2) 512 V (3) 510 V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG: 2.0KVAC/min O/P-FG: 0.5KVAC/min	I/P-O/P: 4.125KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 0.6 KVAC/min Ta: 25°C	I/P-O/P: 3.087 mA I/P-FG: 3.412 mA O/P-FG: 1.863 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG: 500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta: 25°C	I/P-O/P: >9999 MΩ I/P-FG: >9999 MΩ O/P-FG: >9999 MΩ
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 50 mΩ EN 60950-1	40 A / 2min Ta: 25°C / 70%RH	19 MΩ


E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 Class C	I/P: 230VAC/50HZ O/P: FULL/75% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 INDUSTRY L-N: 2KV L,N-PE: 4KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																
1	TEMPERATURE RISE TEST	MODEL: HBG-240-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: 95% LOAD Ta=24.6 °C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: 95% LOAD Ta=58.6 °C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta=24.6 °C</th><th>HIGH AMBIENT Ta=58.6 °C</th></tr><tr><td>1</td><td>RTH1</td><td>73.4°C</td><td>96.0°C</td></tr><tr><td>2</td><td>BD1</td><td>57.3°C</td><td>86.5°C</td></tr><tr><td>3</td><td>C5</td><td>55.5°C</td><td>84.1°C</td></tr><tr><td>4</td><td>L1</td><td>54.6°C</td><td>83.4°C</td></tr><tr><td>5</td><td>Q1</td><td>56.4°C</td><td>85.9°C</td></tr><tr><td>6</td><td>D2</td><td>56.6°C</td><td>85.9°C</td></tr><tr><td>7</td><td>U1</td><td>51.6°C</td><td>80.9°C</td></tr><tr><td>8</td><td>C39</td><td>51.0°C</td><td>80.3°C</td></tr><tr><td>9</td><td>Q3</td><td>57.2°C</td><td>86.6°C</td></tr><tr><td>10</td><td>Q4</td><td>58.4°C</td><td>87.7°C</td></tr><tr><td>11</td><td>T1</td><td>68.8°C</td><td>96.0°C</td></tr><tr><td>12</td><td>Q101</td><td>62.4°C</td><td>93.5°C</td></tr><tr><td>13</td><td>C103</td><td>56.7°C</td><td>86.9°C</td></tr><tr><td>14</td><td>TSW1</td><td>53.8°C</td><td>82.9°C</td></tr><tr><td>15</td><td>TC</td><td>44.5°C</td><td>74.2°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta=24.6 °C	HIGH AMBIENT Ta=58.6 °C	1	RTH1	73.4°C	96.0°C	2	BD1	57.3°C	86.5°C	3	C5	55.5°C	84.1°C	4	L1	54.6°C	83.4°C	5	Q1	56.4°C	85.9°C	6	D2	56.6°C	85.9°C	7	U1	51.6°C	80.9°C	8	C39	51.0°C	80.3°C	9	Q3	57.2°C	86.6°C	10	Q4	58.4°C	87.7°C	11	T1	68.8°C	96.0°C	12	Q101	62.4°C	93.5°C	13	C103	56.7°C	86.9°C	14	TSW1	53.8°C	82.9°C	15	TC	44.5°C	74.2°C
NO	Position	ROOM AMBIENT Ta=24.6 °C	HIGH AMBIENT Ta=58.6 °C																																																																	
1	RTH1	73.4°C	96.0°C																																																																	
2	BD1	57.3°C	86.5°C																																																																	
3	C5	55.5°C	84.1°C																																																																	
4	L1	54.6°C	83.4°C																																																																	
5	Q1	56.4°C	85.9°C																																																																	
6	D2	56.6°C	85.9°C																																																																	
7	U1	51.6°C	80.9°C																																																																	
8	C39	51.0°C	80.3°C																																																																	
9	Q3	57.2°C	86.6°C																																																																	
10	Q4	58.4°C	87.7°C																																																																	
11	T1	68.8°C	96.0°C																																																																	
12	Q101	62.4°C	93.5°C																																																																	
13	C103	56.7°C	86.9°C																																																																	
14	TSW1	53.8°C	82.9°C																																																																	
15	TC	44.5°C	74.2°C																																																																	
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/100VAC O/P: FULL LOAD Ta= -45°C	TEST: OK																																																																
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=60°C HUMIDITY= 95 %R.H	TEST: OK																																																																
4	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)	I/P: 230 VAC O/P: FULL LOAD	± 0.004 %/°C (0~50°C)																																																																
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																																																
6	THERMAL SHOCK TEST	1. Thermal shock Temperature: -45°C ~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC/95% LOAD AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST		TEST: OK																																																																

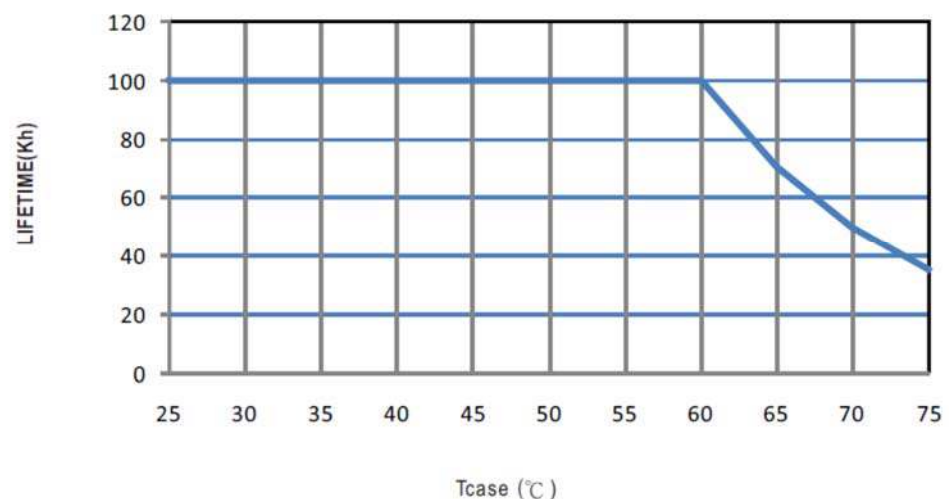7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 12min/sweep cycle (4) Acceleration: 5G (5) Test Time: 180min in each axis (X.Y.Z) (6) Ta: 25℃	TEST: OK
8	CAPACITOR LIFE CYCLE	HBG-240-24: SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 60 ℃ LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 60 ℃ LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 60 ℃ LIFE TIME	(1) 409516 HRS (2) 46167 HRS (3) 83344 HRS (4) 106254 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 663.8K hrs min. Telcordia SR-332 (Bellcore) 190.7K hrs min. MIL-HDBK-217F (25℃)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 50,000 hours @ Tcase 70℃ 	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	SHENJW/ZHUOKB	SKY	LIUWY