


# Current Transducer LA 25-NP

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$I_{PN} = 25 \text{ At}$



## Electrical data

$I_{PN}$	Primary nominal RMS current	25	At			
$I_{PM}$	Primary current, measuring range	0 ... $\pm 36$	At			
$R_M$	Measuring resistance @ with $\pm 15 \text{ V}$	$T_A = 70 \text{ }^\circ\text{C}$		$T_A = 85 \text{ }^\circ\text{C}$		
		$R_{M \min}$	$R_{M \max}$	$R_{M \min}$	$R_{M \max}$	$\Omega$
		@ $\pm 25 \text{ At}_{\max}$	100	320	100	315
	@ $\pm 36 \text{ At}_{\max}$	100	190	100	185	$\Omega$
$I_{SN}$	Secondary nominal RMS current	25	mA			
$N_P/N_S$	Turns ratio	1-2-3-4-5	: 1000			
$U_C$	Supply voltage ( $\pm 5 \%$ )	$\pm 15$	V			
$I_C$	Current consumption	$10 + I_S$	mA			

## Accuracy - Dynamic performance data

$\epsilon_{\text{tot}}$	Total error @ $I_{PN}, T_A = 25 \text{ }^\circ\text{C}$	$\pm 0.5$	%		
$\epsilon_L$	Linearity error	$< 0.2$	%		
$I_{OE}$	Electrical offset current <sup>1)</sup> @ $I_P = 0, T_A = 25 \text{ }^\circ\text{C}$	Typ	Max	mA	
		$\pm 0.05$	$\pm 0.15$		
$I_{OM}$	Magnetic offset current <sup>2)</sup> @ $I_P = 0$ and specified $R_M$ , after an overload of $3 \times I_{PN}$	$\pm 0.05$	$\pm 0.15$	mA	
$I_{OT}$	Temperature variation of $I_O$	0 $^\circ\text{C}$ ... +25 $^\circ\text{C}$	$\pm 0.06$	$\pm 0.25$	mA
		+25 $^\circ\text{C}$ ... +70 $^\circ\text{C}$	$\pm 0.10$	$\pm 0.35$	mA
		-25 $^\circ\text{C}$ ... +85 $^\circ\text{C}$		$\pm 0.5$	mA
		-40 $^\circ\text{C}$ ... +85 $^\circ\text{C}$		$\pm 1.2$	mA
$t_{D90}$	Delay time <sup>3)</sup> to 90 % of the final output value for $I_{PN}$	step $< 1$	$\mu\text{s}$		
$BW$	Frequency bandwidth (-1 dB)	DC ... 150	kHz		

## General data

$T_A$	Ambient operating temperature	-40 ... +85	$^\circ\text{C}$
$T_{A \text{ st}}$	Ambient storage temperature	-45 ... +90	$^\circ\text{C}$
$R_P$	Resistance of primary (winding) @ $T_A = 25 \text{ }^\circ\text{C}$	$< 1.25$	m $\Omega$
$R_S$	Resistance of secondary winding @ $T_A = 70 \text{ }^\circ\text{C}$	110	$\Omega$
		@ $T_A = 85 \text{ }^\circ\text{C}$	115
$R_{\text{INS}}$	Insulation resistance @ 500 V, $T_A = 25 \text{ }^\circ\text{C}$	$> 1500$	M $\Omega$
$m$	Mass	22	g
	Standards	EN 50178: 1997 UL 508: 2010	

Notes: <sup>1)</sup> Measurement carried out after 15 mn functioning  
<sup>2)</sup> The result of the coercive field of the magnetic circuit  
<sup>3)</sup> For a  $di/dt = 100 \text{ A}/\mu\text{s}$ .

## Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

## Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

## Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

## Application domain

- Industrial.

## Current Transducer LA 25-NP

### Insulation coordination

$U_d$	RMS voltage for AC insulation test, 50 Hz, 1 min	2.5	kV
$U_{Ni}$	Impulse withstand voltage 1.2/50 $\mu$ s	9	kV
		Min	
$d_{Cp}$	Creepage distance	10.63	mm
$d_{Cl}$	Clearance	10.63	mm
$CTI$	Comparative tracking index (group IIIa)	175	

### Applications examples

According to **EN 50178** and **IEC 61010-1** standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
$d_{Cp}, d_{Cl}, U_{Ni}$	Rated insulation voltage	Nominal voltage
Basic insulation	1000 V	1000 V
Reinforced insulation	500 V	300 V

### Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

## Dimensions LA 25-NP (in mm)

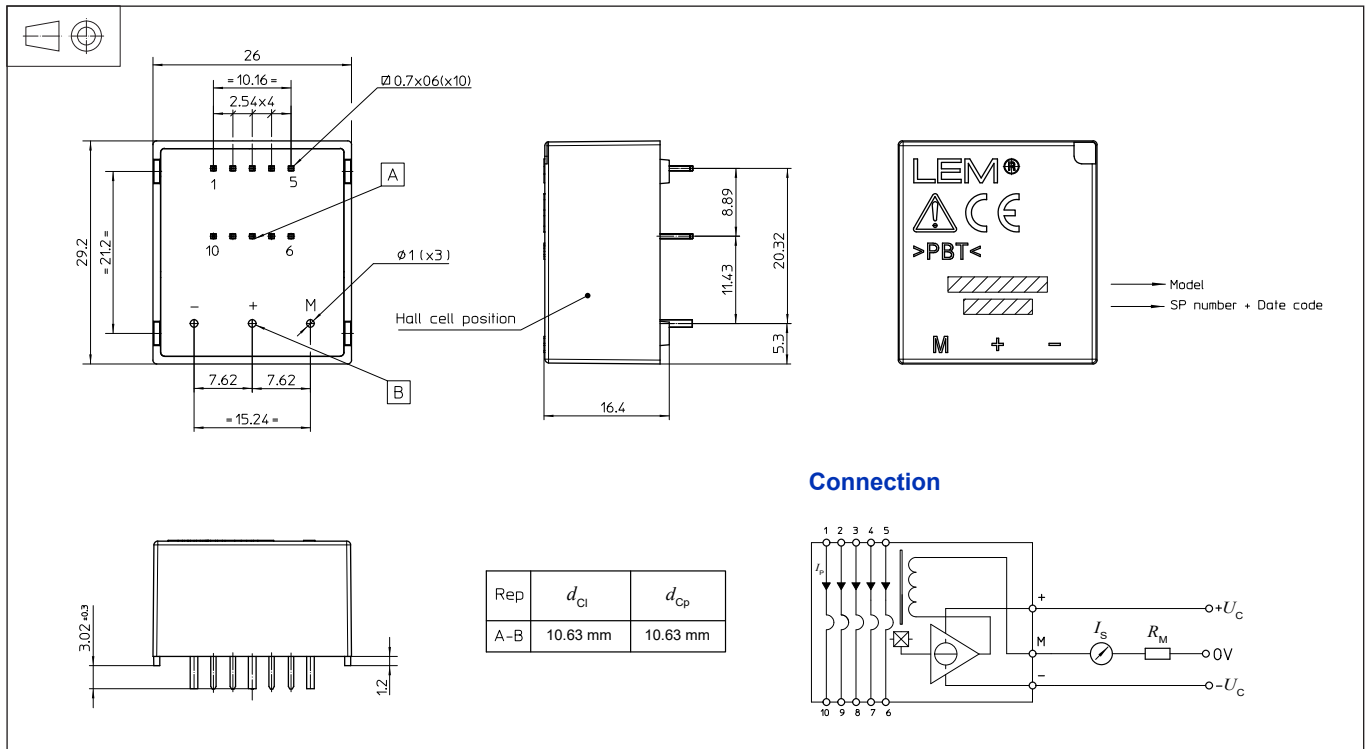

Number of primary turns	Primary current		Nominal output current $I_{S,N}$ [mA]	Turns ratio $N_P/N_S$	Primary resistance $R_P$ [m $\Omega$ ]	Primary insertion inductance $L_P$ [ $\mu$ H]	Recommended connections
	nominal $I_{P,N}$ [A]	maximum $I_P$ [A]					
1	25	36	25	1 / 1000	0.3	0.023	
2	12	18	24	2 / 1000	1.1	0.09	
3	8	12	24	3 / 1000	2.5	0.21	
4	6	9	24	4 / 1000	4.4	0.37	
5	5	7	25	5 / 1000	6.3	0.58	

### Mechanical characteristics

- General tolerance  $\pm 0.2$  mm
- Fastening & connection of primary 10 pins  $0.7 \times 0.6$  mm
- Fastening & connection of secondary 3 pins  $\varnothing 1$  mm
- Recommended PCB hole 1.2 mm

### Remarks

- $I_S$  is positive when  $I_P$  flows from terminals 1, 2, 3, 4, 5 to terminals 10, 9, 8, 7, 6.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

 [www.simpex.ch](http://www.simpex.ch)

Besuchen Sie unseren Simpex E-Shop mit über 12'000 Produkten.

Er bietet Ihnen eine breite Funktionsvielfalt, sowie intelligente Suchfunktionen. Ob Sie den Shop als Einkaufsplattform oder als Produktfinder nutzen – im Simpex E-Shop haben Sie alle Informationen schnell und tagesaktuell zur Hand.

24h und das 365 Tage im Jahr.



## Hauptsitz

**Simpex Electronic AG**  
Binzackerstrasse 33  
CH-8620 Wetzikon  
Telefon +41 44 931 10 10  
E-Mail [contact@simpex.ch](mailto:contact@simpex.ch)  
Internet [www.simpex.ch](http://www.simpex.ch)

## Manufaktur

**Simpex Electronic SA**  
En Bas-le-Port 1  
CH-2088 Cressier  
E-Mail [contact@simpex.ch](mailto:contact@simpex.ch)  
Internet [www.simpex.ch](http://www.simpex.ch)