


Current Transducer LA 306-S

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$$I_{PN} = 300 \text{ A}$$



Electrical data

I_{PN}	Primary nominal rms current @ $T_A = 70 \text{ }^\circ\text{C}$	400	A
I_{PN}	Primary nominal rms current @ $T_A = 85 \text{ }^\circ\text{C}$	300	A
I_{PM}	Primary current, measuring range	0 .. ± 700	A
R_M	Measuring resistance @ $T_A = 70 \text{ }^\circ\text{C}$	$R_{M \min}$ $R_{M \max}$	
	with $\pm 15 \text{ V}$	0 35	Ω
	@ $\pm 400 \text{ A}_{\max}$ @ $\pm 700 \text{ A}_{\max}$	0 6	Ω
I_{SN}	Secondary nominal rms current @ $T_A = 70 \text{ }^\circ\text{C}$	200	mA
I_{SN}	Secondary nominal rms current @ $T_A = 85 \text{ }^\circ\text{C}$	150	mA
K_N	Conversion ratio	1 : 2000	
U_C	Supply voltage ($\pm 5 \%$)	± 15	V
I_C	Current consumption	$25 + I_S$	mA

Accuracy - Dynamic performance data

X_G	Overall accuracy @ $I_{PN}, T_A = 25 \text{ }^\circ\text{C}$	± 0.7	%
ϵ_L	Linearity error	< 0.1	%
I_O	Offset current @ $I_P = 0, T_A = 25 \text{ }^\circ\text{C}$	Typ	± 0.3
		Max	± 0.3
I_{OM}	Magnetic offset current @ $I_P = 0$ and specified R_M , after an overload of $3 \times I_{PN}$	± 0.3	mA
I_{OT}	Temperature variation of I_O - $40 \text{ }^\circ\text{C} \dots + 85 \text{ }^\circ\text{C}$	± 0.2 ± 0.5	mA
t_r	Step of response time to 90 % of I_{PN}	< 1	μs
di/dt	di/dt accurately followed	> 50	A/ μs
BW	Frequency bandwidth (- 3 dB)	DC .. 50	kHz

General data

T_A	Ambient operating temperature	- 40 .. + 85	$^\circ\text{C}$
T_S	Ambient storage temperature	- 45 .. + 90	$^\circ\text{C}$
R_S	Resistance of secondary winding @ $T_A = 85 \text{ }^\circ\text{C}$	33	Ω
m	Mass	137	g
	Standards	EN 50178: 1997 UL 508: 2010	

Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Current Transducer LA 306-S

Insulation coordination

U_d	Rms voltage for AC insulation test, 50 Hz, 1 min	5.5	kV
\hat{U}_w	Impulse withstand voltage 1.2/50 μ s	10	kV
		Min	
d_{cp}	Creepage distance	19	mm
d_{cl}	Clearance	11.2	mm
CTI	Comparative tracking index (group I)	600	

Applications examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
$d_{cp}, d_{cl}, \hat{U}_w$	Rated insulation voltage	Nominal voltage
Basic insulation	1000 V	1000 V
Reinforced insulation	500 V	500 V

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Dimensions LA 306-S (in mm)

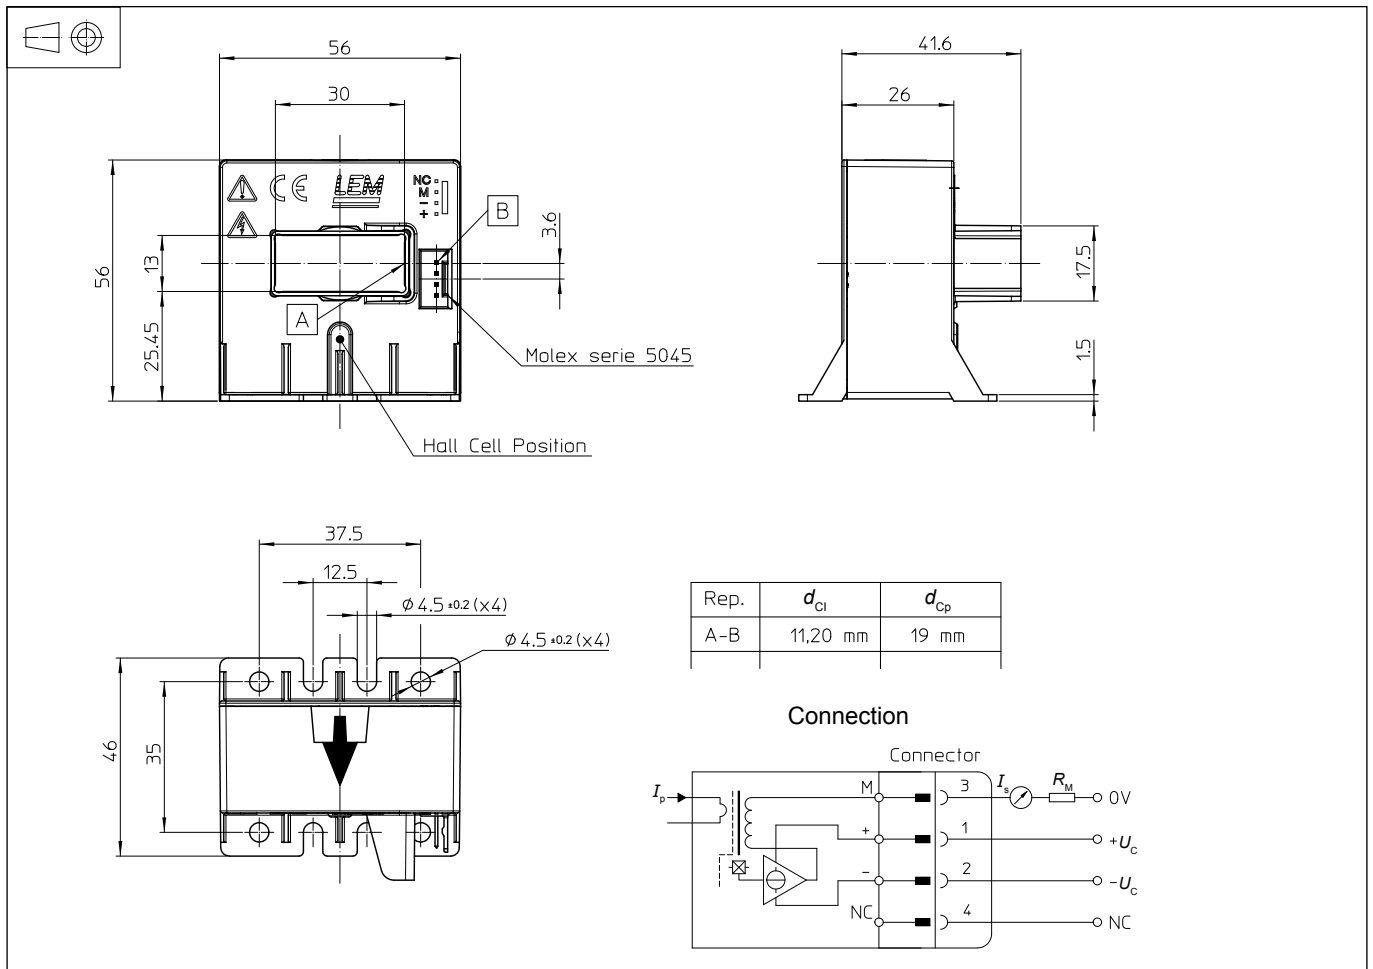

Mechanical characteristics

- General tolerance ± 0.5 mm
- Transducer fastening
 - 4 holes $\phi 4.5$ mm
 - 4 M4 steel screws
- Recommended fastening torque 2.9 N·m
- or 4 slots $\phi 4.5$ mm
- 4 M4 steel screws
- Recommended fastening torque 2.9 N·m
- Primary through-hole 13 × 30 mm
- Connection of secondary Molex 5045 connector

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100 °C.
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: [Products/Product Documentation](#).
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

 www.simpex.ch

Besuchen Sie unseren Simpex E-Shop mit über 12'000 Produkten.

Er bietet Ihnen eine breite Funktionsvielfalt, sowie intelligente Suchfunktionen. Ob Sie den Shop als Einkaufsplattform oder als Produktfinder nutzen – im Simpex E-Shop haben Sie alle Informationen schnell und tagesaktuell zur Hand.

24h und das 365 Tage im Jahr.



Hauptsitz

Simpex Electronic AG
Binzackerstrasse 33
CH-8620 Wetzikon
Telefon +41 44 931 10 10
E-Mail contact@simpex.ch
Internet www.simpex.ch

Manufaktur

Simpex Electronic SA
En Bas-le-Port 1
CH-2088 Cressier
E-Mail contact@simpex.ch
Internet www.simpex.ch