



TEST REPORT: GSM120A48

120W AC-DC Reliable Green Medical Adaptor

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test


E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST


DESIGN VERIFY TEST
OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.5% ~ -2.5%	I/P : 100VAC / 264VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.99% ~ -1.16%
2	LINE REGULATION (MAX.)	V1 : 1.0% ~ -1.0%	I/P : 100VAC / 264VAC O/P: FULL LOAD TA : 25°C	V1: 0.08% ~ 0.00%
3	LOAD REGULATION (MAX.)	V1 : 2.5% ~ -2.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.99% ~ -1.16%
4	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 3.4 %
5	RIPPLE & NOISE(Max)	V1 : 200 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 34 mVp-p
6	SET UP TIME (MAX.)	230VAC : 1500ms 115VAC : 2000ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 424ms 115VAC : 464ms
		<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	
	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 10.2ms 115VAC : 9.0ms

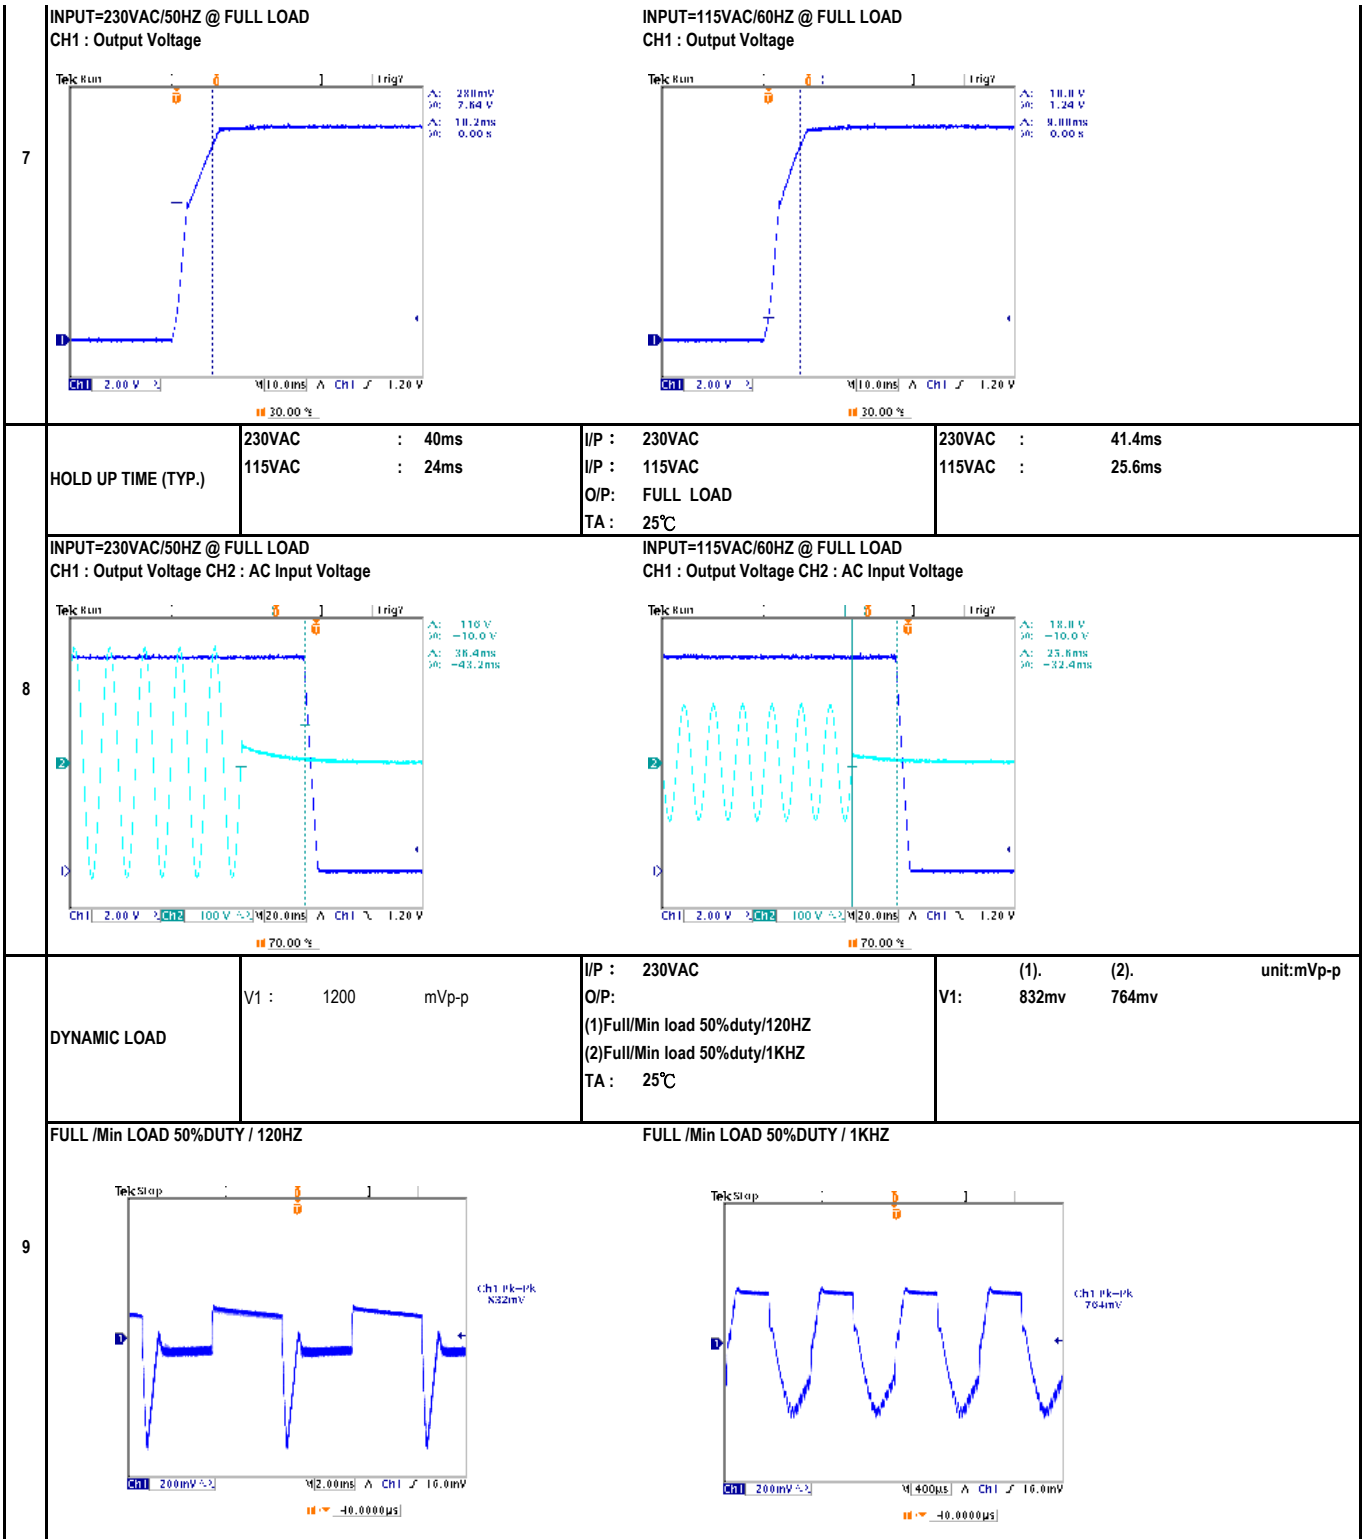

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	56.0VAC ~ 264VAC
			I/P : LOW-LINE = 97VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 100VAC ~ 264VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.7 / 230VAC 1.4 / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.402 / 230VAC I= 0.7832 / 115VAC
4	LEAKAGE CURRENT	< 115uA Earth leakage current	I/P : 264VAC O/P : MIN LOAD TA : 25°C	55 uA Earth
		< 100uA Touch leakage current	I/P : 264VAC O/P : MIN LOAD TA : 25°C	49 uA Touch
5	NO LOAD POWER CONSUMPTION	< 0.15W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.113 W
6	POWER FACTOR (TYP.)	0.93 / 230VAC 0.97 / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	PF= 0.9547 / 230VAC PF= 0.9905 / 115VAC
7	EFFICIENCY (TYP.)	91.5%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	92.1 %
	INRUSH CURRENT (TYP.)	70A / 230VAC 35A / 115VAC twidth= 0 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 47.8A / 230VAC I= 22.0A / 115VAC

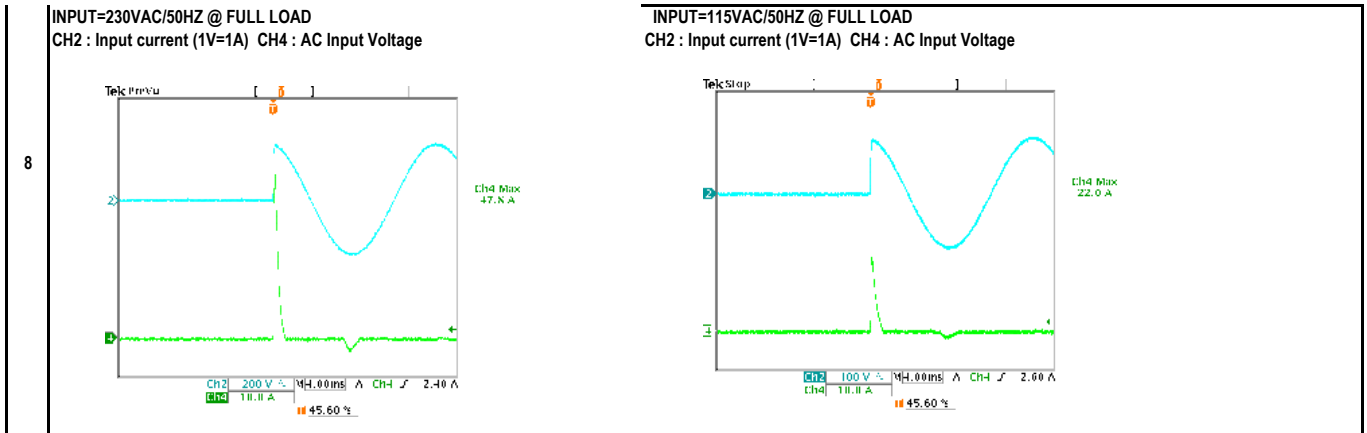

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105% ~ 160%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING TA: 25°C	135% 264VAC 135% 230VAC 129% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	50.40V ~ 64.80V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD TA: 25°C	58.60V 264VAC 58.40V 230VAC 58.60V 80VAC Shut down Re- power ON
3	OVER TEMPERATURE PROTECTION	Shut down Re- power ON	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Shut down Re- power ON
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q32 Rated : 700V 11.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 616.00V (2). 612.00V (3). 596.00V
2	O/P Diode (MOSFET)	Q101 Rated : 300V 20.0A Q102 Rated : 300V 20.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	Q101 Q102 VDS : VDS : (1). 292.00V 292.00V (2). 288.00V 288.00V (3). 284.00V 284.00V
3	Input Capacitor	C5 Rated : 120uf 420V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 416.00V (2). 414.00V (3). 416.00V

4	Control IC	U2	Rated :	28V (max) -0.3V (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)O.V.P (5)Low Line No Load Vo(min) Ta : 25°C	U2 (1). 18.94V (2). 15.20V (3). 17.20V (4). 21.20V (5). 12.70V
		U101	Rated :	38V (max) -0.4V (min)		
5	PFC Power Transistor	Q31	Rated :	600V 16.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 456.00V (2). 446.00V (3). 440.00V
		D1	Rated :	600V 9.0A	I/P : 267VAC O/P : (1)Full Load Turn on (2) Output Short (3)Dynamic Load Full/Min Load 90%Duty/5KHz (4)Dynamic Load Full/Min Load 50%Duty/120Hz Ta : 25°C	267VAC (1). 432.00V (2). 412.00V (3). 424.00V (4). 420.00V
6	PFC Diode	D30	Rated :	800V 3.0A	I/P : 267VAC O/P : (1)Dynamic Load Full/Min Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1). 548.00V (2). 544.00V

■ SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1		I/P-O/P : 4.000KVAC /min	I/P-O/P: 4.400KVAC /min	I/P-O/P: 2.43mA
		I/P-FG : 2.000KVAC /min	I/P-FG: 2.400KVAC /min	I/P-FG: 1.33mA
2	ISOLATION RESISTANCE	O/P-FG : 0.500KVAC /min	O/P-FG: 0.600KVAC /min	O/P-FG: 2.92mA
		I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C	NO DAMAGE
			Ta : 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR: 15KV / Contact: 8KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 L-N:1KV;L/N-PE: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A



RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	TEMPERATURE RISE TEST	MODEL : GSM120A24-R7B			
		1. ROOM AMBIENT BURN-IN : 1.0hrs			
		IP: 230VAC O/P: 100% LOAD TA= 19.1°C			
		2. HIGH AMBIENT BURN-IN : 1.0hrs			
		IP: 230VAC O/P: 100% LOAD TA= 38.3°C			
			NO. Position ROOM AMBIENT 19.1°C HIGH AMBIENT Ta: 38.3°C		
			1 RTH1 87.2°C 87.4°C		
			2 LF1 63.0°C 75.7°C		
			3 LF2 59.1°C 74.0°C		
			4 LF3 58.1°C 73.4°C		
			5 L1 60.5°C 75.8°C		
			6 L2 61.8°C 77.1°C		
			7 C5 63.8°C 78.6°C		
			8 C52 67.9°C 83.0°C		
			9 T1 68.7°C 84.0°C		
			10 BD1 60.7°C 75.5°C		
			11 Q31 62.1°C 78.5°C		
			12 D1 62.4°C 78.2°C		
			13 Q32 64.1°C 80.6°C		
	14 Q102 66.6°C 82.7°C				
	15 C110 65.4°C 81.2°C				
	16 C113 64.2°C 80.0°C				
	17 LF100 53.9°C 70.5°C				
	18 U1 63.4°C 79.8°C				
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230VAC O/P : 124.8% LOAD Ta : 25°C	TEST : OK	
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 264VAC / 100VAC O/P : FULL LOAD Ta : -30.0°C	TEST : OK	
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40°C NO DAMAGE	I/P : 272VAC O/P : FULL LOAD Ta : 40°C HUMIDITY= 95.0% RH	TEST : OK	
5	TEMPERATURE COEFFICIENT	±0.03% /(0°C~40°C)	I/P : 230VAC O/P : FULL LOAD	±0.0063% /(0°C~40°C)	
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		TEST : OK	
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C ~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 58sec ; turn off 2sec		TEST : OK	
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK	
9	CAPACITOR LIFE CYCLE	:SUPPOSE C110 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25.0°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 40.0°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 40.0°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 40.0°C LIFE TIME		(1). 110534.6 HRS (2). 49494.7 HRS (3). 100427.6 HRS (4). 200085.6 HRS	
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE : 268.5 KHRS			
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above	30000HRS @ TA 40°C		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ