



# Test Report: GST160A20-R7B

---

160W AC-DC High Reliability Industrial Adaptor

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



## ■ RELIABILITY TEST

ENVIRONMENT TEST



DESIGN VERIFY TEST







OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -4%~ 4%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.05 %-0.796 %
2	LINE REGULATION (Max)	V1: -1 %~ 1 %	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0.05 %-0 %
3	LOAD REGULATION(Max)	V1: -4 %~ 4 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.05 %-0.796 %
4	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	< ±5%
5	RIPPLE & NOISE(Max )	V1: 120mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 17.2mVp-p

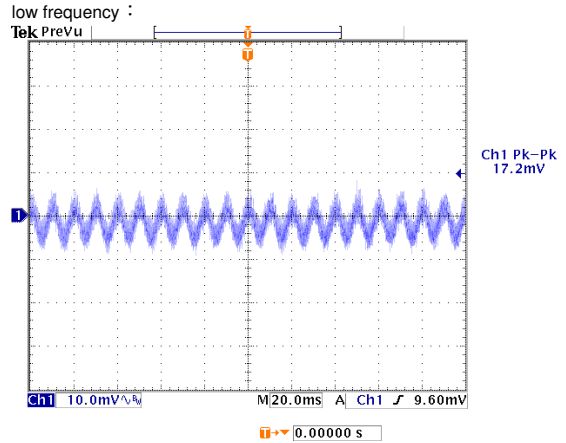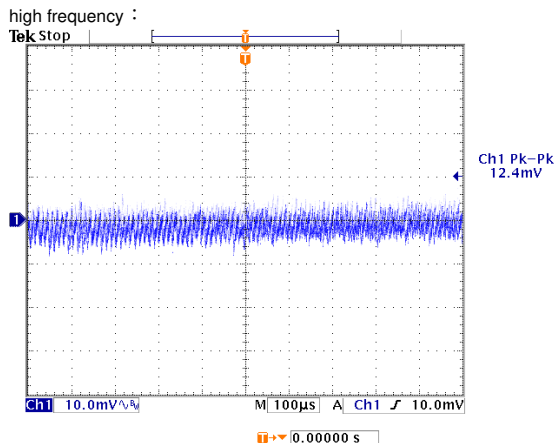

6	SET UP TIME(Max)	230VAC/2000ms 115VAC/2500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 1656 ms 115VAC/ 1088 ms
---	------------------	--------------------------------	--	------------------------------------

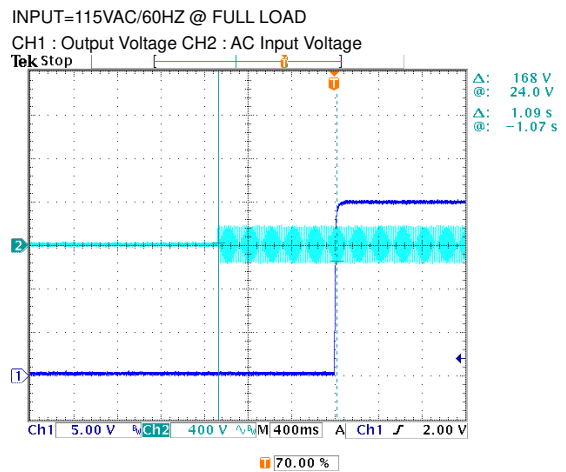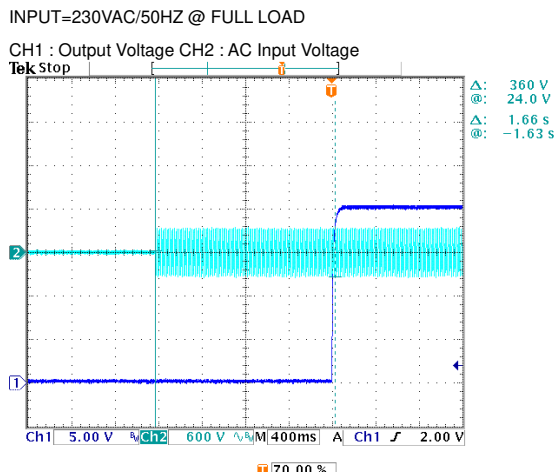

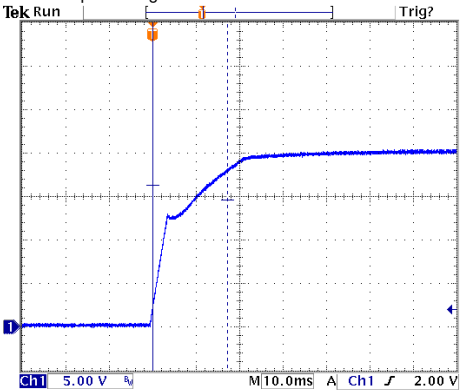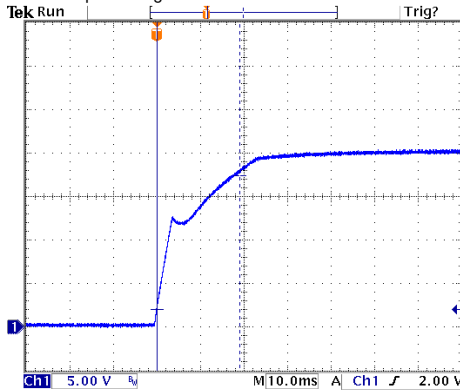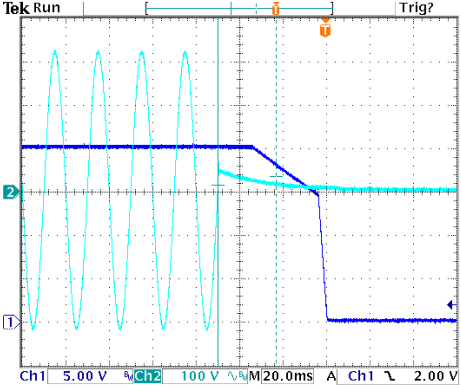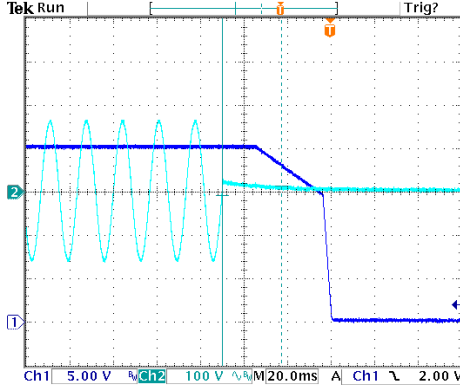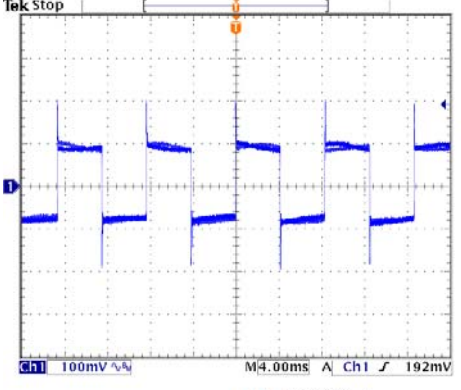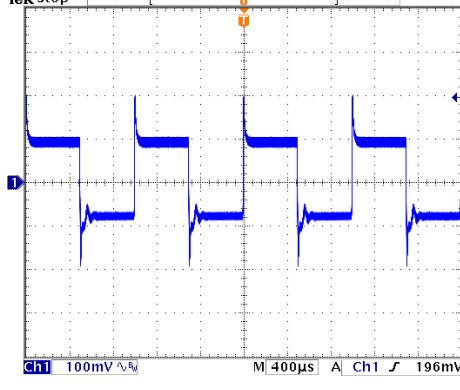
<p>7</p> <p>RISE TIME (Max)</p>	<p>230VAC/50ms 115VAC/50ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 17.2 ms 115VAC/ 19 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>  <p>Δ: 1.70 V @: 16.3 V Δ: 17.2ms @: 0.00 s</p> <p>Ch1 5.00 V M10.0ms A Ch1 2.00 V</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>  <p>Δ: 15.4 V @: 2.00 V Δ: 19.0ms @: 0.00 s</p> <p>Ch1 5.00 V M10.0ms A Ch1 2.00 V</p>	
<p>8</p> <p>HOLD UP TIME (Typ.)</p>	<p>230VAC/20ms 115VAC/20ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 26.8 ms 115VAC/ 27.2 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p>  <p>Δ: 20.0 V @: 16.0 V Δ: 26.8ms @: -50.0ms</p> <p>Ch1 5.00 V Ch2 100 V M20.0ms A Ch1 2.00 V</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p>  <p>Δ: 22.0 V @: -8.00 V Δ: 27.2ms @: -50.0ms</p> <p>Ch1 5.00 V Ch2 100 V M20.0ms A Ch1 2.00 V</p>	
<p>9</p> <p>DYNAMIC LOAD</p>	<p>V1: 2000mVp-p</p>	<p>I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C</p>	<p>390mVp-p 390mVp-p</p>
<p>FULL /50% LOAD 50%DUTY / 120HZ</p>  <p>Ch1 Pk-Pk 390mV</p> <p>Ch1 100mV M4.00ms A Ch1 192mV</p>		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p>  <p>Ch1 Pk-Pk 390mV</p> <p>Ch1 100mV M400μs A Ch1 196mV</p>	


### INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	100VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	78 V~264V
			I/P: LOW-LINE-3V=97 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:100 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1A 115V/ 1.85A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I = 0.782A / 230VAC I = 1.512A / 115VAC
4	LEAKAGE CURRENT	<0.75 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.467 mA N-FG : 0.467 mA
5	NO LOAD CONSUMPTION	< 0.15W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.1035 W < 0.1229 W
6	POWER FACTOR (Typ.)	0.94/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.944/230VAC PF=0.994/115VAC


P.F vs LOAD

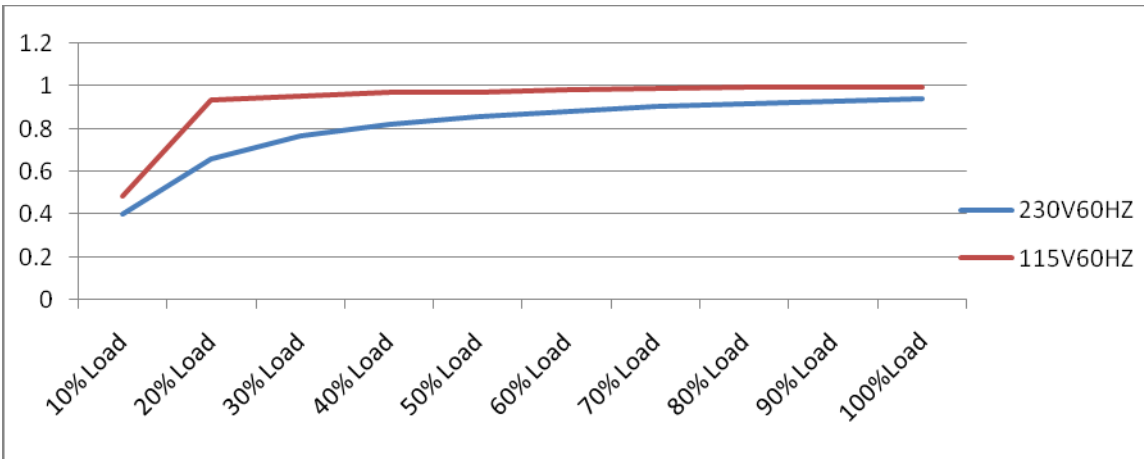

7	EFFICIENCY(Typ.)	93%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	94.13 %
EFFICIENCY vs LOAD				

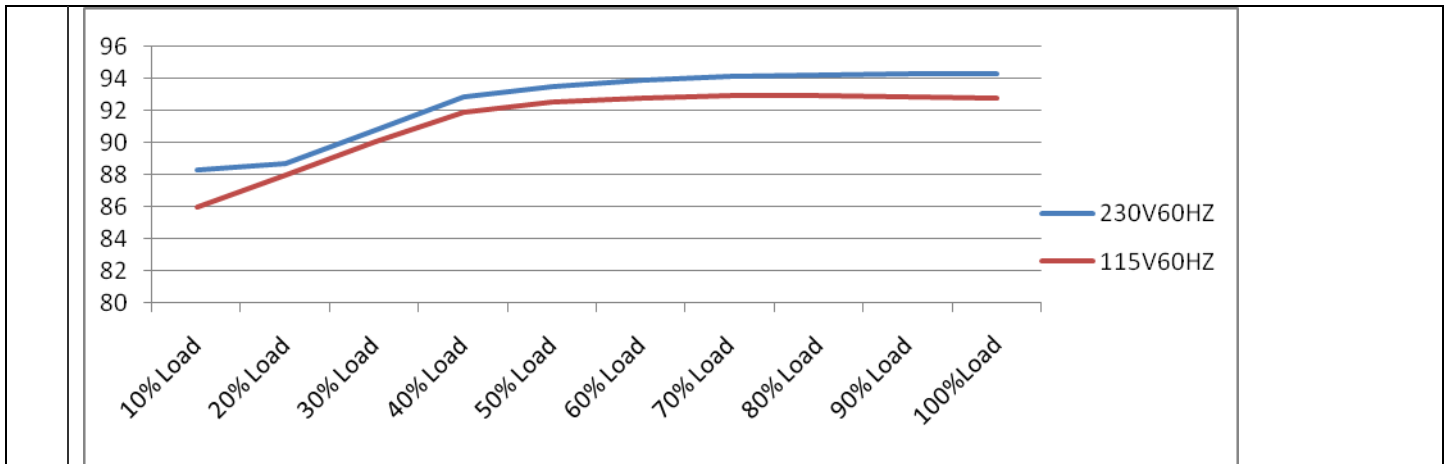

8	INRUSH CURRENT(Typ.)	230V/120A	I/P : 230 VAC	I =106A/ 230VAC
		115V/60A	I/P : 115 VAC	I =55.6A/ 115VAC
		COLD START	O/P : FULL LOAD	
			Ta : 25°C	

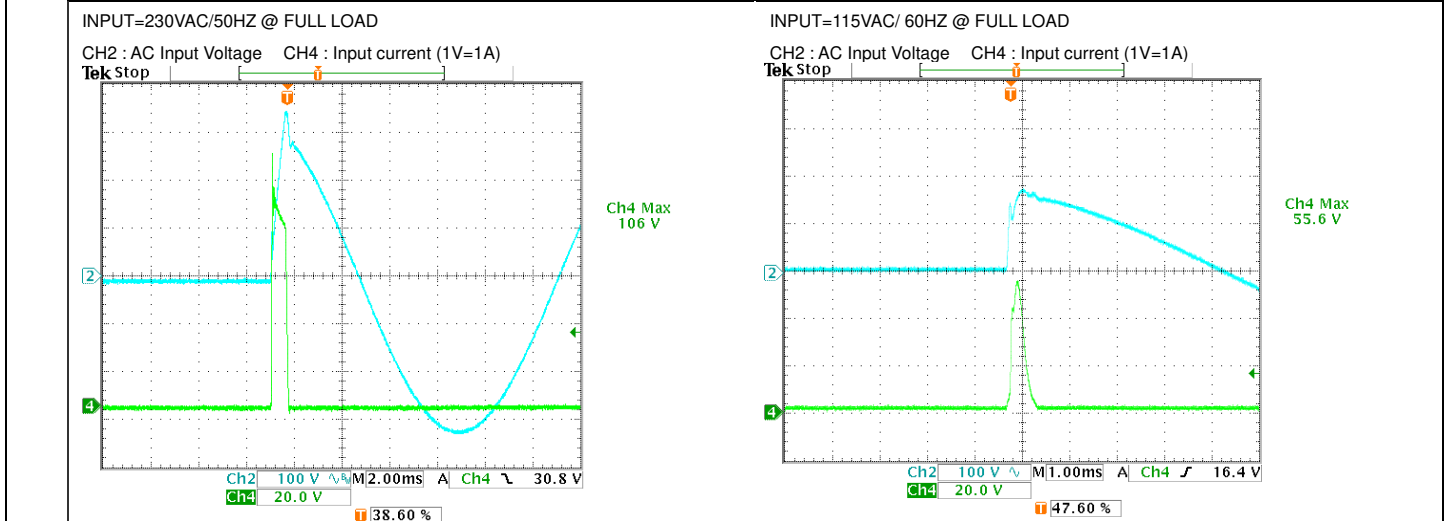

### PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 150%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	127.0%/ 264VAC 127.0%/ 230VAC 127.7%/100VAC PROTECTION TYPE : Hiccup mode,recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	21V~27V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	25.1V/ 264VAC 25.1V/ 230VAC 25.1V/ 90VAC PROTECTION TYPE : Shot down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type :	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode,recovers automatically after fault condition is removed

### COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor ( D to S) or (G to E) <b>Peak Voltage</b>	Q5 Rated : 12A/ 500V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load Continue Ta:25°C	VDS: (1) 460V (2) 464V (3) 434V
2	P.F.C Transistor ( D to S) or (G to E) <b>Peak Voltage</b>	Q1 Rated : 16A/ 600V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load Continue Ta:25°C	VDS: (1) 536V (2) 534V (3) 458V
3	P.F.C DIODE	D1 Rated : 9 A/ 600V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1) 456V (2) 428V (3) 463V (4) 460V
4	Diode Peak <b>Voltage</b>	Q101 Rated : 30A/ 60 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Full Load Continue Ta:25°C	Q101: VDS: (1) 48.4V (2) 7.6V (3) 48.4V
5	<b>Input Capacitor Voltage</b>	C5 Rated: : 150 $\mu$ / 420V 105°C	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1) 418V (2) 417V (3) 405V
6	<b>Control IC Voltage Test</b>	PWM IC U1 Rated : 38V -0.4V(MIN.)	I/P:High-Line +3V =267 V AC ON/OFF O/P:(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25°C	U1: (1) 27.2V (2) 20.2V (3) 20.2V (4) 31.7V

### SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG:2KVAC	I/P-O/P: 3.6 KVAC/min I/P-FG:2.4KVAC Ta:25°C	I/P-O/P: 6.87mA I/P-FG:7.94mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M $\Omega$	I/P-O/P: 500 VDC Ta:25°C	I/P-O/P: 9999M $\Omega$ NO DAMAGE

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INPUT : 1KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 L-N : 1KV L,N-PE : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																								
1	TEMPERATURE RISE TEST	MODEL : GST160A12-R7B 1. ROOM AMBIENT BURN-IN : 1HRS I/P : 230VAC O/P : FULL LOAD Ta= 21.3 °C 2. HIGH AMBIENT BURN-IN : 1HRS I/P : 230VAC O/P : FULL LOAD Ta= 52.8 °C																																																																																																										
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 21.3 °C</th> <th>HIGH AMBIENT Ta= 52.8 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>43.6°C</td><td>74.6°C</td></tr> <tr><td>2</td><td>LF2</td><td>47.0°C</td><td>78.0°C</td></tr> <tr><td>3</td><td>L1</td><td>49.3°C</td><td>79.9°C</td></tr> <tr><td>4</td><td>L2</td><td>50.1°C</td><td>80.9°C</td></tr> <tr><td>5</td><td>D2</td><td>50.7°C</td><td>81.3°C</td></tr> <tr><td>6</td><td>C5</td><td>51.8°C</td><td>82.2°C</td></tr> <tr><td>7</td><td>RTH2</td><td>53.7°C</td><td>84.7°C</td></tr> <tr><td>8</td><td>T1 芯</td><td>60.9°C</td><td>91.1°C</td></tr> <tr><td>9</td><td>C101</td><td>62.3°C</td><td>92.9°C</td></tr> <tr><td>10</td><td>C102</td><td>64.5°C</td><td>94.9°C</td></tr> <tr><td>11</td><td>BD1</td><td>51.6°C</td><td>82.1°C</td></tr> <tr><td>12</td><td>Q1</td><td>51.1°C</td><td>81.7°C</td></tr> <tr><td>13</td><td>D1</td><td>51.8°C</td><td>82.4°C</td></tr> <tr><td>14</td><td>Q6</td><td>51.7°C</td><td>82.3°C</td></tr> <tr><td>15</td><td>Q5</td><td>52.2°C</td><td>83.0°C</td></tr> <tr><td>16</td><td>Q101</td><td>57.0°C</td><td>87.6°C</td></tr> <tr><td>17</td><td>Q102</td><td>58.0°C</td><td>88.8°C</td></tr> <tr><td>18</td><td>U1</td><td>57.8°C</td><td>88.0°C</td></tr> <tr><td>19</td><td>T1Coil</td><td>56.5°C</td><td>86.7°C</td></tr> <tr><td>20</td><td>C13</td><td>71.5°C</td><td>99.3°C</td></tr> <tr><td>21</td><td>ZNR1</td><td>45.9°C</td><td>77.0°C</td></tr> <tr><td>22</td><td>C11</td><td>50.1°C</td><td>80.7°C</td></tr> <tr><td>23</td><td>R5</td><td>50.7°C</td><td>81.2°C</td></tr> <tr><td>24</td><td>C81</td><td>54.0°C</td><td>84.4°C</td></tr> <tr><td>25</td><td>U101</td><td>59.4°C</td><td>89.4°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 21.3 °C	HIGH AMBIENT Ta= 52.8 °C	1	LF1	43.6°C	74.6°C	2	LF2	47.0°C	78.0°C	3	L1	49.3°C	79.9°C	4	L2	50.1°C	80.9°C	5	D2	50.7°C	81.3°C	6	C5	51.8°C	82.2°C	7	RTH2	53.7°C	84.7°C	8	T1 芯	60.9°C	91.1°C	9	C101	62.3°C	92.9°C	10	C102	64.5°C	94.9°C	11	BD1	51.6°C	82.1°C	12	Q1	51.1°C	81.7°C	13	D1	51.8°C	82.4°C	14	Q6	51.7°C	82.3°C	15	Q5	52.2°C	83.0°C	16	Q101	57.0°C	87.6°C	17	Q102	58.0°C	88.8°C	18	U1	57.8°C	88.0°C	19	T1Coil	56.5°C	86.7°C	20	C13	71.5°C	99.3°C	21	ZNR1	45.9°C	77.0°C	22	C11	50.1°C	80.7°C	23	R5	50.7°C	81.2°C	24	C81	54.0°C	84.4°C	25	U101	59.4°C	89.4°C		
NO	Position	ROOM AMBIENT Ta= 21.3 °C	HIGH AMBIENT Ta= 52.8 °C																																																																																																									
1	LF1	43.6°C	74.6°C																																																																																																									
2	LF2	47.0°C	78.0°C																																																																																																									
3	L1	49.3°C	79.9°C																																																																																																									
4	L2	50.1°C	80.9°C																																																																																																									
5	D2	50.7°C	81.3°C																																																																																																									
6	C5	51.8°C	82.2°C																																																																																																									
7	RTH2	53.7°C	84.7°C																																																																																																									
8	T1 芯	60.9°C	91.1°C																																																																																																									
9	C101	62.3°C	92.9°C																																																																																																									
10	C102	64.5°C	94.9°C																																																																																																									
11	BD1	51.6°C	82.1°C																																																																																																									
12	Q1	51.1°C	81.7°C																																																																																																									
13	D1	51.8°C	82.4°C																																																																																																									
14	Q6	51.7°C	82.3°C																																																																																																									
15	Q5	52.2°C	83.0°C																																																																																																									
16	Q101	57.0°C	87.6°C																																																																																																									
17	Q102	58.0°C	88.8°C																																																																																																									
18	U1	57.8°C	88.0°C																																																																																																									
19	T1Coil	56.5°C	86.7°C																																																																																																									
20	C13	71.5°C	99.3°C																																																																																																									
21	ZNR1	45.9°C	77.0°C																																																																																																									
22	C11	50.1°C	80.7°C																																																																																																									
23	R5	50.7°C	81.2°C																																																																																																									
24	C81	54.0°C	84.4°C																																																																																																									
25	U101	59.4°C	89.4°C																																																																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 230 VAC O/P : 130 % LOAD Ta : 25°C	TEST : OK																																																																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -35 °C	TEST : OK																																																																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50.4 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																																								
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C(0-50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.0083 %/°C(0-50°C)																																																																																																								



6	STORAGE TEMPERATURE TEST	<ol style="list-style-type: none"> <li>1. Thermal shock Temperature : -20°C~ +85°C</li> <li>2. Temperature change rate : 25°C / MIN</li> <li>3. Dwell time low and high temperature : 30 MIN/EACH</li> <li>4. Total test cycle : 5 CYCLE</li> <li>5. Input/Output condition : STATIC</li> </ol>	OK
7	THERMAL SHOCK TEST	<ol style="list-style-type: none"> <li>1. Thermal shock Temperature : -30°C~ +70°C</li> <li>2. Temperature change rate : 25°C / MIN</li> <li>3. Dwell time low and high temperature : 30 MIN/EACH</li> <li>4. Total test cycle : 10 CYCLE</li> <li>5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec</li> </ol>	OK
8	VIBRATION TEST	<p>1 Carton &amp; 1 Set</p> <ol style="list-style-type: none"> <li>(1) Waveform : Sine Wave</li> <li>(2) Frequency : 10~500Hz</li> <li>(3) Sweep Time : 12min/sweep cycle</li> <li>(4) Acceleration : 2G</li> <li>(5) Test Time : 60min in each axis (X.Y.Z)</li> <li>(6) Ta : 25°C</li> </ol>	TEST : OK
9	CAPACITOR LIFE CYCLE	<p>SUPPOSE C 102 IS THE MOST CRITICAL COMPONENT</p> <ol style="list-style-type: none"> <li>(1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME</li> <li>(2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME</li> <li>(3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME</li> <li>(4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME</li> </ol>	<ol style="list-style-type: none"> <li>(1) 154993HRS</li> <li>(2) 29620HRS</li> <li>(3) 67945HRS</li> <li>(4) 132990HRS</li> </ol>
10	MTBF	<p>MIL-HDBK-217F TOTAL FAILURE RATE : 236.4 KHRS</p>	
11	DMTBF/Accelerated Life Test	<p>Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C</p>	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	wangdz

2007/3/20 A50-S014