



Test Report: NTS-450-224

450W High Reliable Built-in Type True Sine Wave DC-AC Power Inverter

- **DESIGN VERIFY TEST**

- Output Function Test

- Input Function Test

- Protection Function Test

- Control Function Test

- APPLICATION Test

- Component Stress Test

- **SAFETY & E.M.C. TEST**

- Safety Test

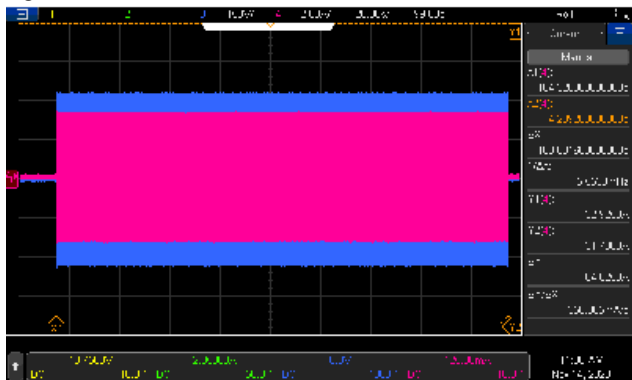
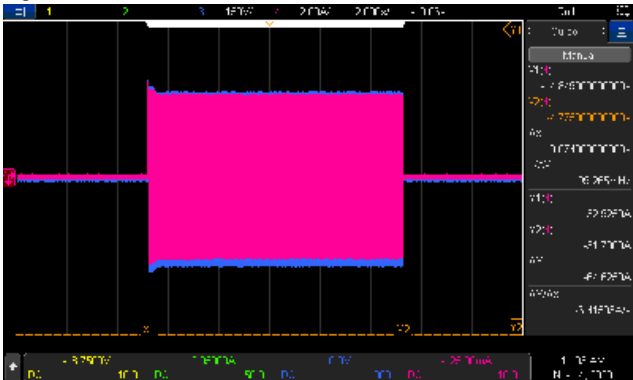
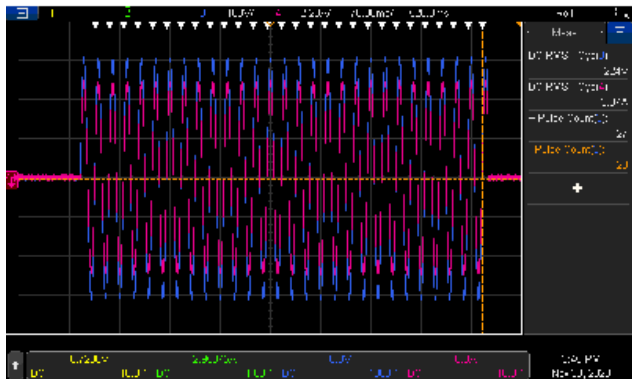
- E.M.C. Test

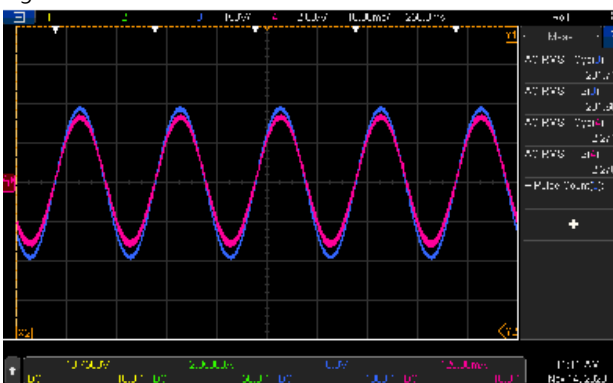
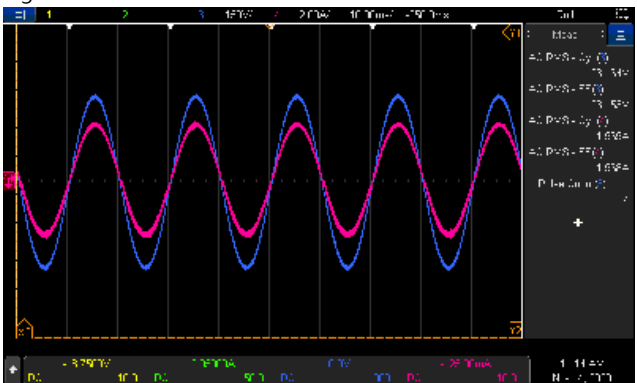
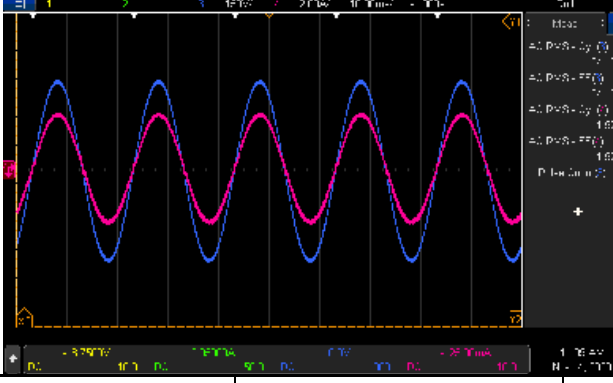
- **RELIABILITY TEST**

- ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RATED POWER	450W	IP: 24VDC Ta:25°C	<u>460 W</u>
2	MAXIMUM OUTPUT POWER (TYP)	(1)517.5W/180sec. (2)675w/10sec (3)SURGE POWER 900W FOR 30CYCLE Vin (30±5 CYCLE)	IP: 25VDC OP: TESTING LOAD Ta:25°C	(1) 228.3V/ 2.19 A/180.08 Sec (2) 228.85V/ 2.86 A/ 10.07 Sec (3) 232.1 V/ 3.943A/ 28 Cycle
CH3:O/P VAC CH4:O/P IAC				
Fig1		Fig2		
				
Fig3		Fig4		
				
3	AC Voltage	200 / 220 / 230 / 240Vac selectable by DIP S.W	IP: 24VDC OP: FULL LOAD Ta:25°C	DIP S.W 200VAC: <u>198.3</u> V DIP S.W 220VAC: <u>218.3</u> V DIP S.W 230VAC: <u>228.6</u> V DIP S.W 240VAC: <u>238.8</u> V
4	FREQUENCY	50/60Hz (±0.1HZ) selectable by DIP S.W	IP: 24VDC OP: FULL LOAD Ta:25°C	DIP S.W 50HZ: <u>50.041</u> HZ DIP S.W 60HZ: <u>59.958</u> HZ
5	WAVEFORM	True sine wave (THD<3%)	IP: 25VDC OP: FULL LOAD (1) Vo(min) (2) Vo(nor) (3) Vo(max) Ta:25°C	(1) <u>0.66</u> % / Vo(min) /FULL LOAD (2) <u>0.68</u> % / Vo(nor) /FULL LOAD (3) <u>0.67</u> % / Vo(max) /FULL LOAD

CH3:O/P VAC CH4:O/P IAC				
Fig1  Fig2  Fig3 				
6	AC REGULATION	±3%	IP: 25VDC OP: FULL LOAD/NO LOAD Ta:25°C	<u>-0.61 %</u>
7	Overshoot /Undershoot	<±10%	IP: 24VDC OP: (1) full load turn on (2) no load turn on (3) full /no load change Ta:25°C	(1) <u>-7.9%</u> (2) <u>-6.5</u> (3) <u>-2.7%</u>
8	O/P voltage DC offset	Vin(nor)= <u>24</u> v · Vo <200mv · load : <u>92mV</u> / full load: <u>77mV</u>		

9	LED STATUS	Status test <table> <tr> <th>LED</th><th>Status</th><th>RESULT</th></tr> <tr> <td>Green</td><td> Inverter OK</td><td>OK</td></tr> <tr> <td>Orange</td><td>  Remote off  Saving mode </td><td>OK</td></tr> <tr> <td>Red</td><td> Abnormal Status (See SPEC)</td><td>OK</td></tr> </table> Battery test <table> <tr> <th>LED</th><th>Battery RANGE</th><th>RESULT</th></tr> <tr> <td>Green </td><td>25VDC~31VDC±0.5v</td><td>25.11vdc ~31.02 vdc</td></tr> <tr> <td>Orange </td><td>22~ 25Vdc ±0.5v</td><td>22.313Vdc ~25.031 Vdc</td></tr> <tr> <td>Red </td><td><22 Vdc ±0.5v > 31Vdc±0.5v</td><td>< 22.17 vdc > 31.22 Vdc</td></tr> </table> Load test <table> <tr> <th>LED</th><th>LOAD RANGE</th><th>RESULT</th></tr> <tr> <td>Green </td><td>Min. load ~ 40%±5% LOAD</td><td>Min. load ~ 39.1%</td></tr> <tr> <td>Orange </td><td>40%±5% ~ 80%±5% LOAD</td><td>40.7% ~ 78.4 %</td></tr> <tr> <td>Red </td><td>≥ 80%±5% LOAD</td><td>≥ 79.6 %</td></tr> </table>	LED	Status	RESULT	Green	 Inverter OK	OK	Orange	 Remote off  Saving mode	OK	Red	 Abnormal Status (See SPEC)	OK	LED	Battery RANGE	RESULT	Green 	25VDC~31VDC±0.5v	25.11vdc ~31.02 vdc	Orange 	22~ 25Vdc ±0.5v	22.313Vdc ~25.031 Vdc	Red 	<22 Vdc ±0.5v > 31Vdc±0.5v	< 22.17 vdc > 31.22 Vdc	LED	LOAD RANGE	RESULT	Green 	Min. load ~ 40%±5% LOAD	Min. load ~ 39.1%	Orange 	40%±5% ~ 80%±5% LOAD	40.7% ~ 78.4 %	Red 	≥ 80%±5% LOAD	≥ 79.6 %
LED	Status	RESULT																																				
Green	 Inverter OK	OK																																				
Orange	 Remote off  Saving mode	OK																																				
Red	 Abnormal Status (See SPEC)	OK																																				
LED	Battery RANGE	RESULT																																				
Green 	25VDC~31VDC±0.5v	25.11vdc ~31.02 vdc																																				
Orange 	22~ 25Vdc ±0.5v	22.313Vdc ~25.031 Vdc																																				
Red 	<22 Vdc ±0.5v > 31Vdc±0.5v	< 22.17 vdc > 31.22 Vdc																																				
LED	LOAD RANGE	RESULT																																				
Green 	Min. load ~ 40%±5% LOAD	Min. load ~ 39.1%																																				
Orange 	40%±5% ~ 80%±5% LOAD	40.7% ~ 78.4 %																																				
Red 	≥ 80%±5% LOAD	≥ 79.6 %																																				

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	VOLTAGE RANGE (TYP)	20VDC~33VDC	IP: TESTING OP:NO LOAD/FULL LOAD Ta:25°C I/P: LOW-LINE=21V HIGH-LINE=32.5V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON:30Sec OFF:30Sec 10MIN (POWER ON/OFF NO DAMAGE) I/P: 24V O/P:FULL LOAD ON:30ec OFF:30ec 12Hr (POWER ON/OFF NO DAMAGE)	<u>20.2 VDC~ 33.2 VDC/NO LOAD</u> <u>20.2 VDC~ 33.2 VDC/FULL LOAD</u> Test: <u>OK</u>

2	DC CURRENT (TYP)	25A	IP: 24VDC OP:FULL LOAD Ta:25°C	<u>19.92</u> A
3	NO LOAD DISSIPATION (Typ.)	≤ 1.3 @ Saving Mode $\leq 10W$ @NON-Saving Mode	IP: 24VDC OP:NO LOAD Ta:25°C	<u>0.828</u> W <u>8.32</u> W
4	SAVING MODE TO NORMAL	$P_o \geq 25W$	IP: 24VDC OP: TESTING LOAD Ta:25°C	<u>≥ 21</u> W
5	NORMAL TO SAVING MODE	$P_o \leq 10W$	IP: 24VDC OP: TESTING LOAD Ta:25°C	<u>≤ 13.2</u> W
6	OFF MODE CURRENT DRAW (Typ.)	$\leq 1mA$	IP: 24VDC OP: Sw off Ta:25°C	<u>0.82</u> mA
7	EFFICIENCY(TYP)	450W/93%	IP: 25VDC OP: $P_o=450W$ 230V/50HZ (factory setting) Ta:25°C	<u>93.8</u> %

PROTECTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	BAT LOW ALARM	22V $\pm$ 0.5VDC	IP: TESTING OP:FULL LOAD SW:ON Ta:25°C	<u>22.1</u> V
2	BAT LOW SHUT DOWN	20V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25°C	<u>20.2</u> V
3	BAT LOW RESTART	25V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25°C	<u>25.2</u> V
4	BAT HIGH ALARM	31V $\pm$ 0.5VDC	IP: TESTING OP:FULL LOAD SW:ON Ta:25°C	<u>31.2</u> V
5	BAT HIGH SHUT DOWN	33V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25°C	<u>33.2</u> V
6	BAT HIGH RESTART	30V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25°C	<u>30.1</u> V

7	OVER TEMPERATURE	Shut down o/p voltage re-power on	IP: HI LINE/LOW-LINE OP: FULL LOAD SW:ON Ta:25°C	Shut down o/p voltage, re-power on to recover LED DISPLAY: <u>OK</u>
8	OUTPUT SHORT	Shut down o/p voltage re-power on	IP: 24VDC O/P: FULL LOAD SW:ON Ta:25°C	Shut down o/p voltage, re-power on to recover LED DISPLAY: <u>OK</u> (1).TEST: <u>OK</u>
9	OVER LOAD (typ.)	105%~115%LOAD 180sec 115%~150%LOAD 10 sec Shut down o/p voltage, re-power on to recover	IP: 24VDC OP: TESTING SW:ON Ta:25°C	(1). <u>106 %</u> ~ <u>111 %</u> <u>180.08</u> sec (2). <u>115.8 %</u> ~ <u>148.8 %</u> <u>10.07</u> sec Shut down o/p voltage, re-power on to recover

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	REMOTE CONTROL	Power ON-OFF remote control by front panel dry contact connector (by RELAY) Open : Normal work Short : Remote off	IP: 24VDC OP: FULL LOAD Ta:25°C	Open : Normal work Short : Remote off TEST: <u>OK</u>

APPLICATION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	LAMP	LAMP: <u>310</u> W · turn on <u>OK</u> LAMP: <u>460</u> W · turn on <u>OK</u> LAMP: <u>604</u> W · turn on <u>OK</u>	1. Vin=HIGH LINE 2. O/P=230V/50Hz TEST: <u>OK</u>	
2	INDUCTION MOTOR	<u>0.15</u> HP	1. Vin=HIGH LINE 2. O/P=230V/50Hz TEST: <u>OK</u>	
3	SWITCHING POWER SUPPLY	WITH PFC: <u>EPP-500-48</u> · O/P= <u>455</u> W	1. Vin=HIGH LINE 2. O/P=230V/50Hz TEST: <u>OK</u>	
		NO PFC: <u>LRS-350-36</u> · NNO/P= <u>355</u> W	1. Vin=HIGH LINE 2. O/P=230V/50Hz TEST: <u>OK</u>	

COMPONENT WEAFORM TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC TO DC Power Transistor (D to S) or (C to E) Peak Voltage	Q102 Rated : 100V /80 A	I/P: high line O/P:V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	(1) 74.8V (2) 74.0V (3) 76.5V (4) 76.5V (5) 81.3V

2	DC TO DC Diode Peak Voltage	D 105 Rated : 600V/10 A	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	(1)519V (2)564V (3)522V (4)528V (5)528V
3	DC BUS Capacitor Voltage	C118 Rated :330u/ 265 V	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	C118 (1) 250V (2) 254V (3) 248V (4) 250V (5)250V C119 (1) 250V (2) 254V (3) 254V (4) 250V (5) 250V
4	DC TO AC Power Transistor (D to S) or (C to E) Peak Voltage	Q 200 Rated : 650V / 15 A	I/P: high line O/P:V(min)/Freq 50HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	(1) 540V (2) 637V (3) 568V (4) 528V (5) 528V
5	AUX PWM MOS	Q504 Rated : 18 A/ 200 V Q105 Rated : 40 A/ 200 V	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (5)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	Q504 (1) 66.3V (2) 66.3V (3) 66.3V (4) 65.5V (5) 65.5V Q105 (1)72.7 V (2) 70.3V (3) 72.7V (4) 71.9V (5) 71.9V
6	Control IC Voltage Test	MCU IC U303 Rated 2.4 V~ 3.6 V AUX IC U501 Rated	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On	U303 (1) 3.42V (2) 3.46V (3) 3.46V (4) 3.33V

		8.2V~30V CHARGE IC U101 Rated -0.3V~20V Gate Driver IC U200 Rated -0.3V~20V	(4) NO LOAD Turn On (5) Saving mode Ta:25°C	(5) 3.33V U501 (1) 11.6V (2) 11.6V (3) 11.6V (4) 11.6V (5) 11.6V U101 (1) 12.45V (2) 12.45V (3) 12.45V (4) 12.45V (5) 12.45V U200 (1) 5.10V (2) 5.10V (3) 5.14V (4) 5.10V (5) 5.10V
--	--	---	---	---

SAFETY & EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	BAT I/P-ACO/P: 3 KVAC/min AC O/P-FG: 1.5 KVAC/min	BAT I/P-ACO/P 3.6 KVAC/min AC O/P-FG:1.8 KVAC/min Ta:25°C	BAT I/P-ACO/P: 1.926 mA AC O/P-FG: 2.246 mA NO DAMAGE
2	GROUNDING CONTINUITY	IEC62368 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25°C	3mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	EN55032 CLASS A	I/P:24 VDC O/P: :FULL/50% LOAD Ta:25°C	CLASS A
2	E.S.D	EN61000-4-2 AIR : 8KV / Contact : 4KV	I/P: 24VDC O/P:FULL LOAD Ta:25°C	☒ CRITERIA A ☐ CRITERIA B
3	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

Reliability Test

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : NTS-450-224 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 25VDC O/P : FULL LOAD Ta= 25 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 25VDC O/P : FULL LOAD Ta= 40 °C		
		NO	Position	ROOM AMBIENT Ta=25 °C
		1	C100	57.7°C
		2	C101	57.5°C
		3	Q103	49.4°C
		4	Q104	49.6°C
		5	RT300	48.9°C
		6	T101	79.3°C
		7	C112	50.4°C
		8	L100	47.9°C
		9	D107	50.4°C
		10	D105	52.5°C
		11	C119	54.3°C
		12	C118	52.8°C
		13	Q200	57.9°C
		14	L201	47.3°C
		15	C219	54.0°C
		16	Q203	57.2°C
		17	L200	72.5°C
		18	RT100	51.3°C
		19	ZR200	35.4°C
		20	C115	41.1°C
		21	T100	42.8°C
		22	T501	54.8°C
		23	T501	47.1°C
		24	Q504	58.4°C
		25	Q105	45.7°C
		26	U501	66.4°C
		27	Q501	62.2°C
		28	U101	47.1°C
		29	U201	57.0°C
		30	U500	54.9°C
		31	U100	53.1°C
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 25VDC O/P : 100%LOAD Ta= -25 °C	TEST : OK

3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40 °C NO DAMAGE	I/P : 32.5VDC O/P : FULL LOAD Ta= 40 °C HUMIDITY= 95 %R.H	TEST : OK
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		TEST : OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -25°C~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 24VDC/Full Load		TEST : OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 4G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P : 25VDC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 25VDC O/P : FULL LOAD Ta= 40 °C LIFE TIME		(1) 388630.8HRS (2) 199778.4HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 281.3K hrs min. Telcordia SR-332 (Bellcore) ; 85K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 25VDC O/P : 80% LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

2018.4.30 GP-A50-F010