



## Characteristic Curves


All test conditions are at 25°C. The figures are identical for MOP06-24D05W

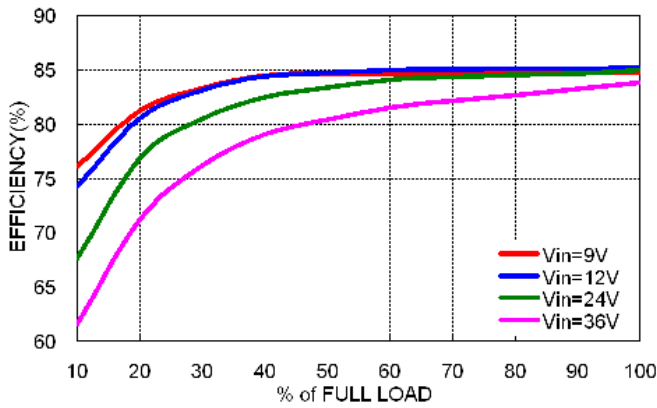


Efficiency versus Output Load

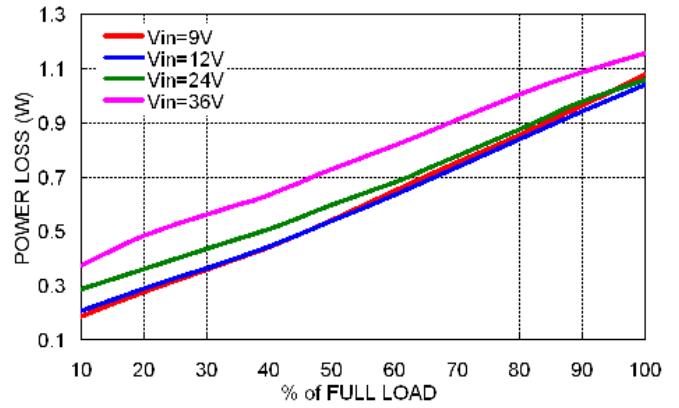

Power Dissipation versus Output Load

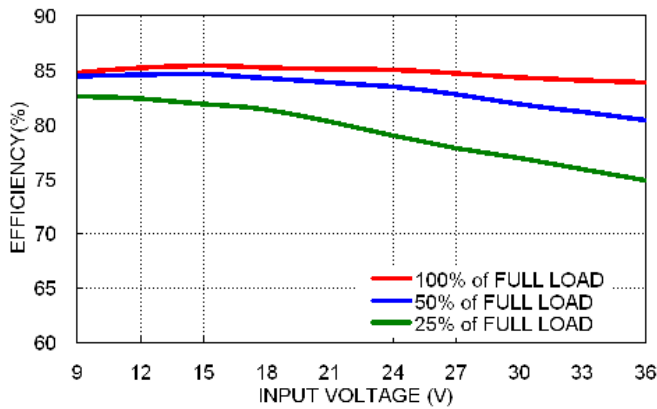


Efficiency versus Input Voltage Full Load

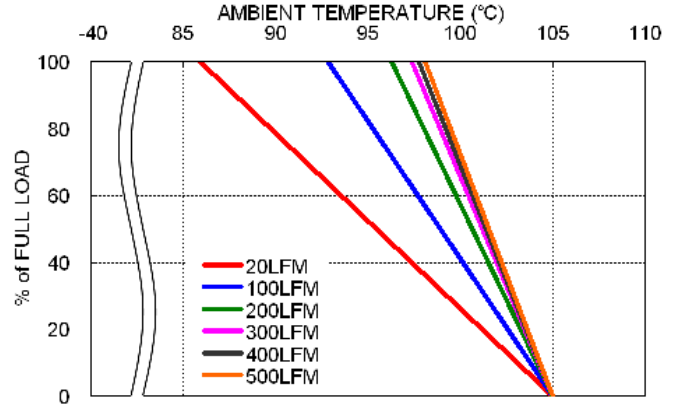


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24D05W

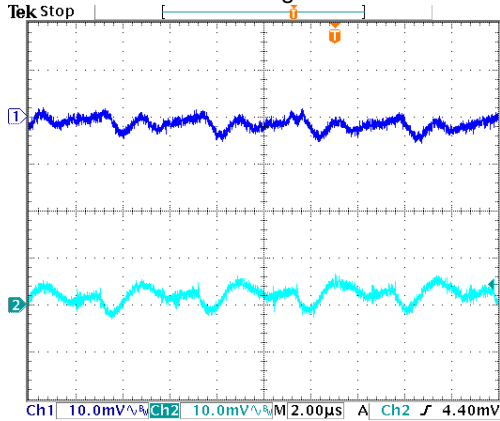


Typical Output Ripple and Noise.  
Vin(nom); Full Load

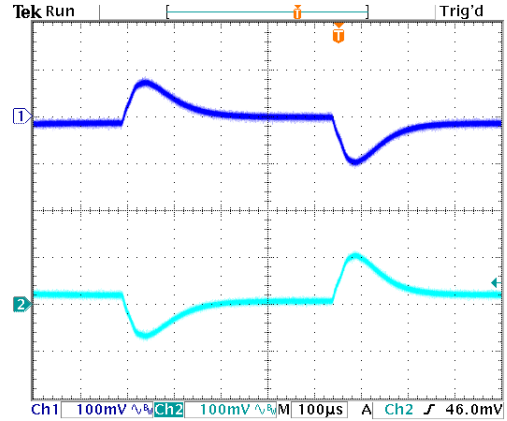

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

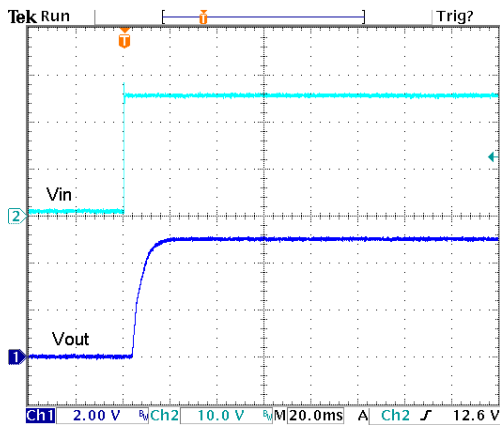


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

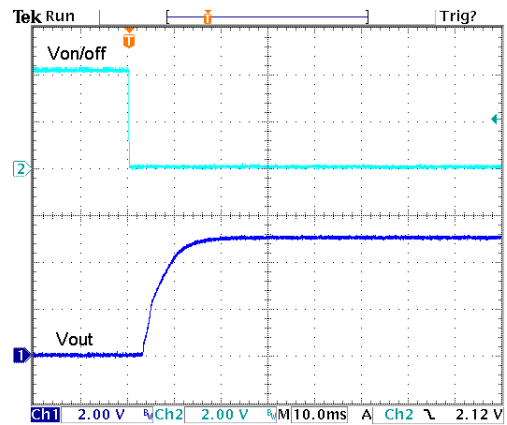


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

**Characteristic Curves (Continued)**


All test conditions are at 25°C. The figures are identical for MOP06-24D12W

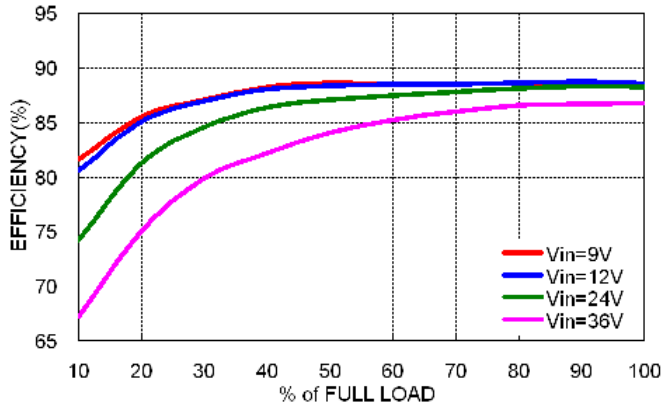


Efficiency versus Output Load

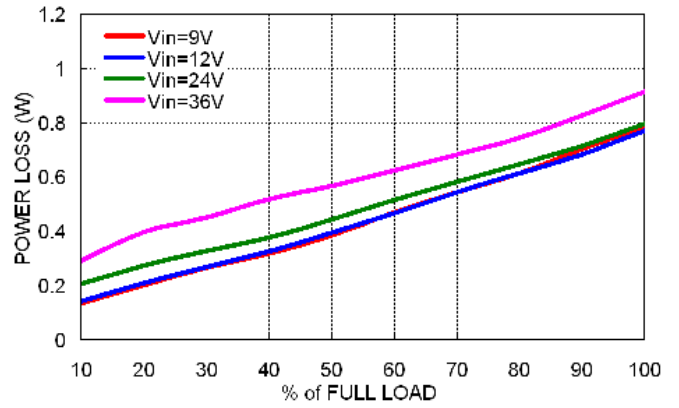

Power Dissipation versus Output Load

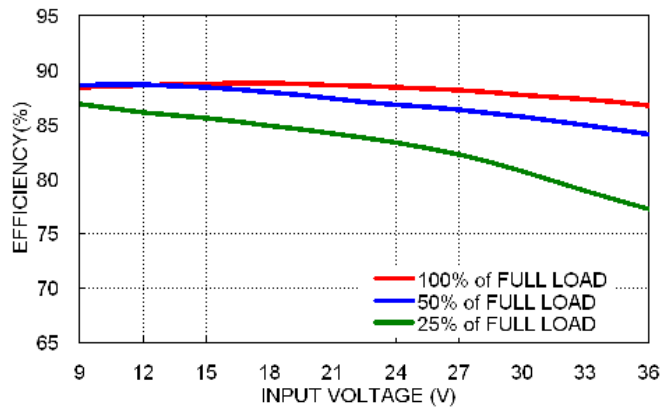


Efficiency versus Input Voltage  
Full Load

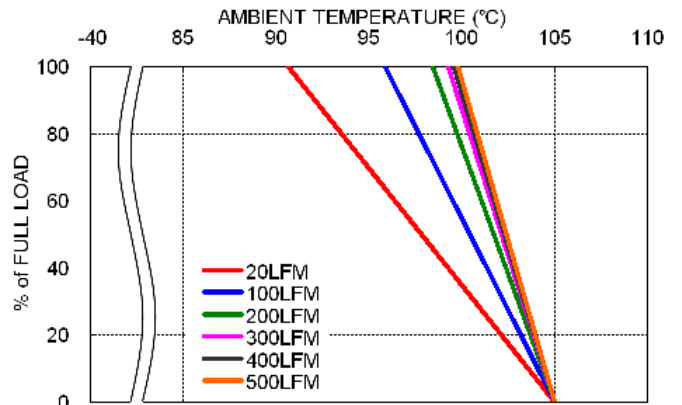


Derating Output Load versus Ambient Temperature and Airflow  
Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24D12W

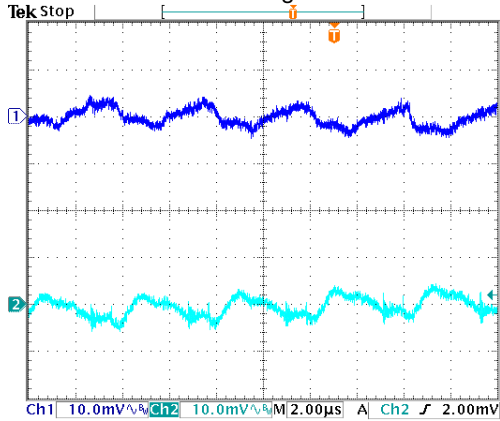


Typical Output Ripple and Noise.  
Vin(nom); Full Load

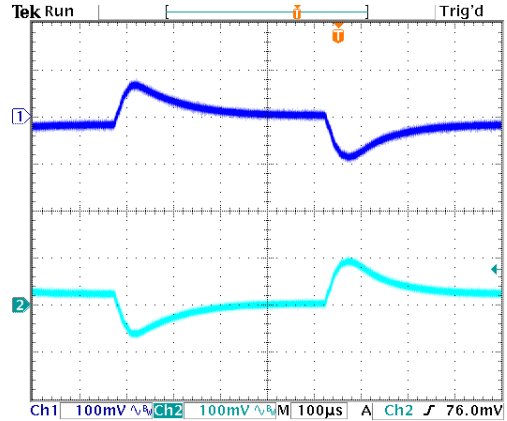

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

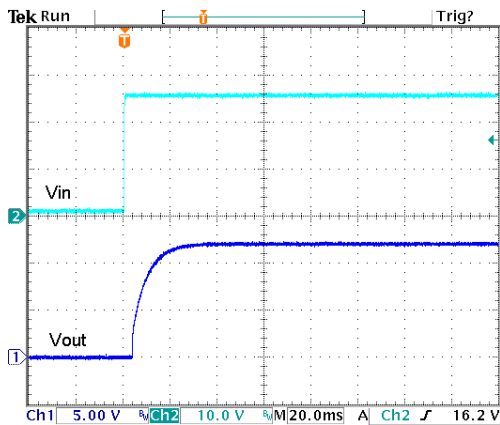


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

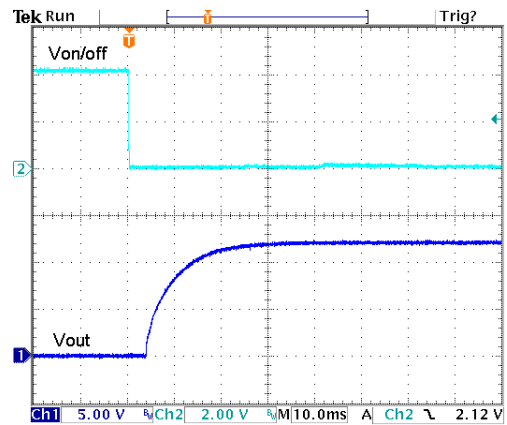


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

**Characteristic Curves (Continued)**


All test conditions are at 25°C. The figures are identical for MOP06-24D15W

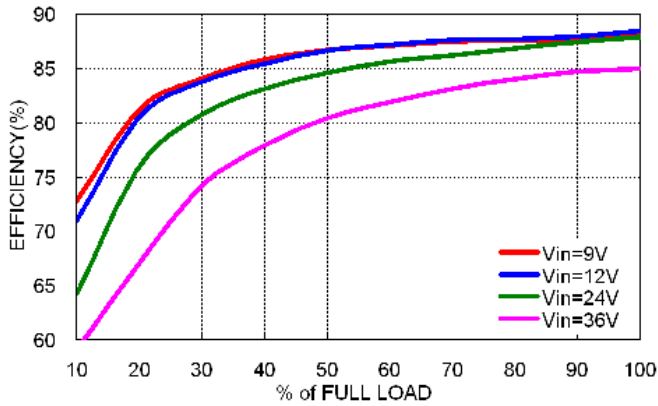


Efficiency versus Output Load

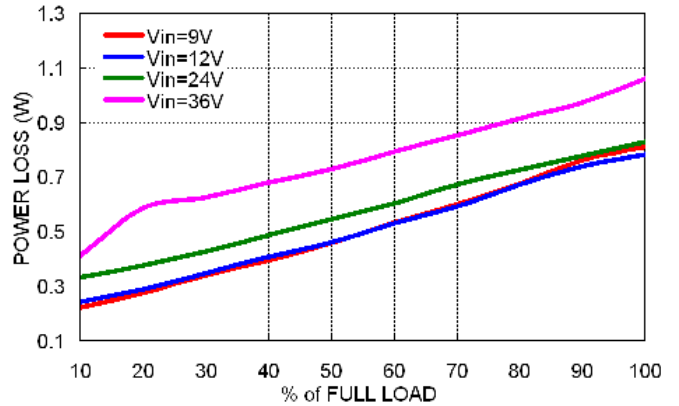

Power Dissipation versus Output Load

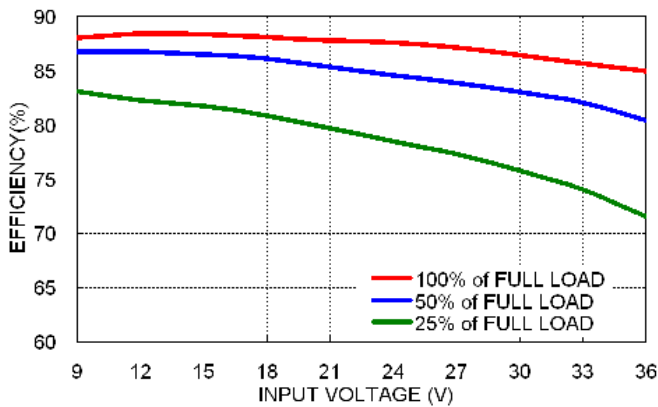


Efficiency versus Input Voltage Full Load

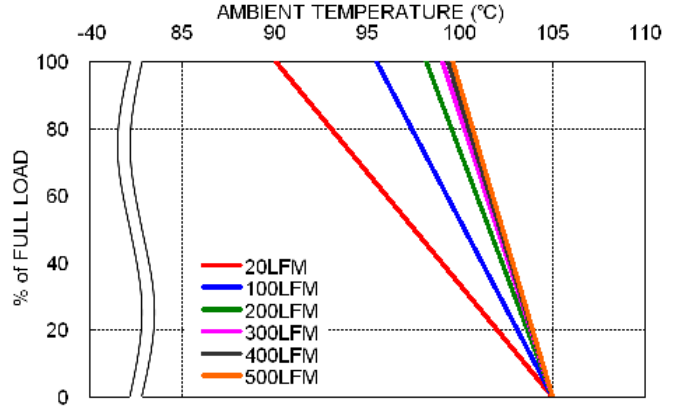


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24D15W

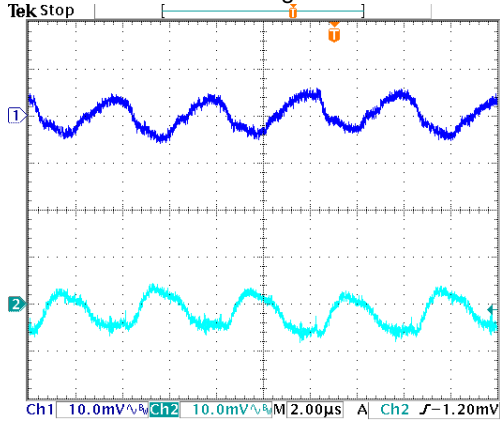


Typical Output Ripple and Noise.  
Vin(nom); Full Load

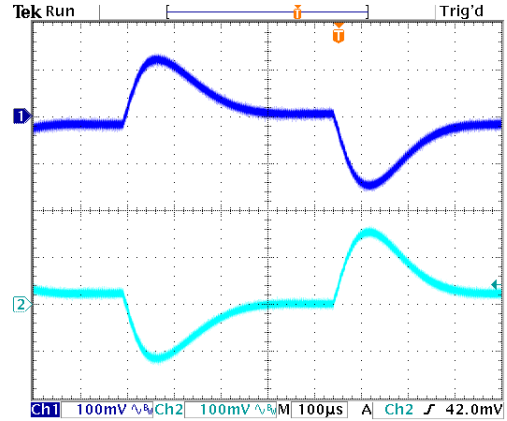

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

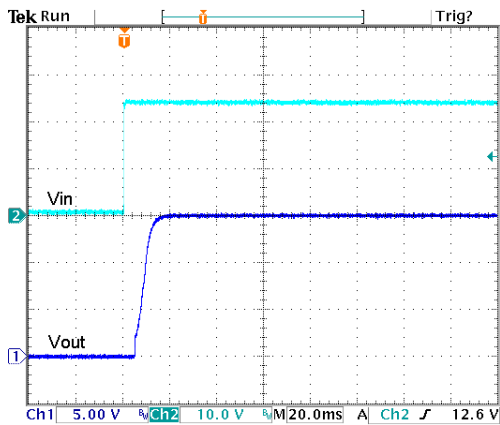


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

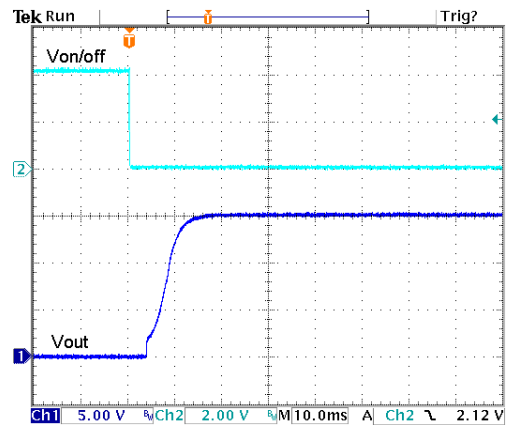


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48D05W

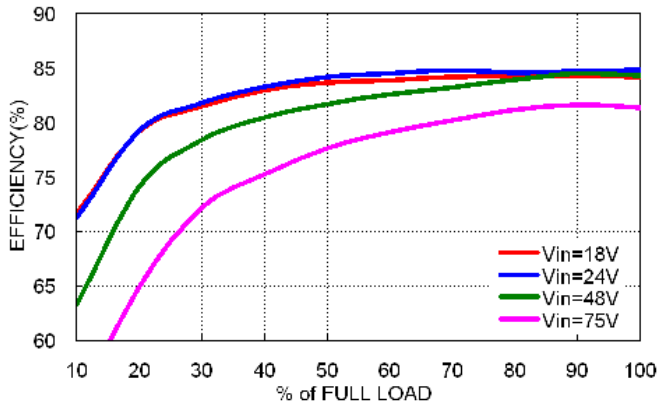


Efficiency versus Output Load

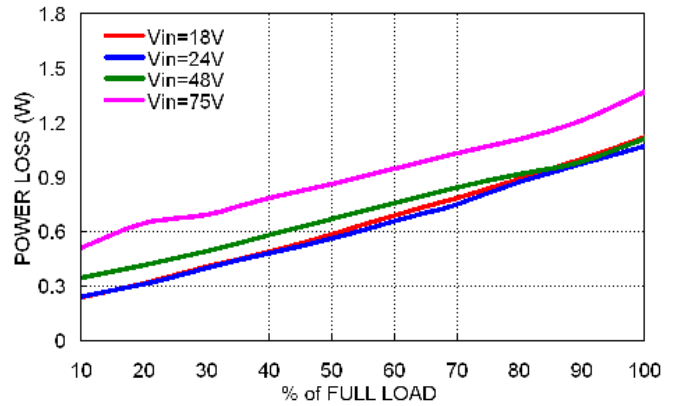

Power Dissipation versus Output Load

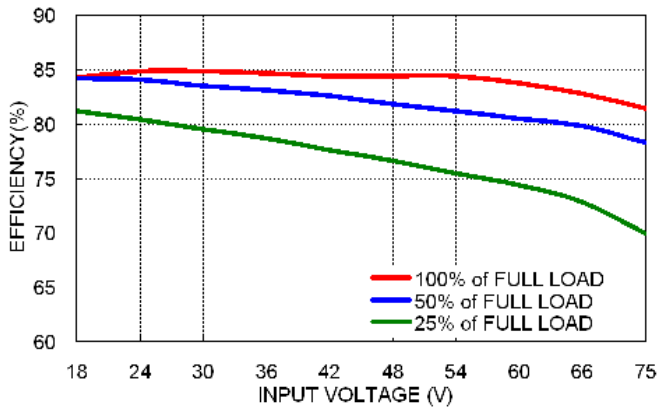


Efficiency versus Input Voltage  
Full Load

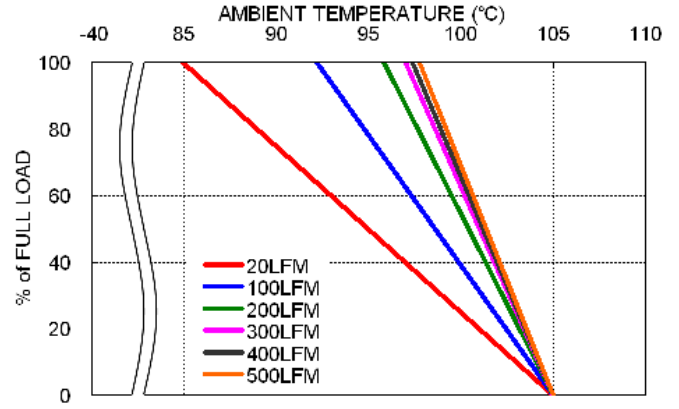


Derating Output Load versus Ambient Temperature and Airflow  
Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48D05W

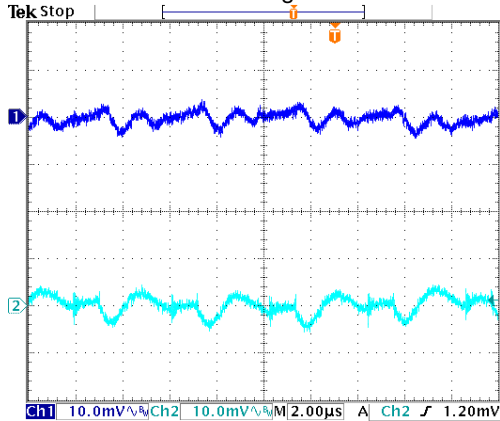


Typical Output Ripple and Noise.  
Vin(nom); Full Load

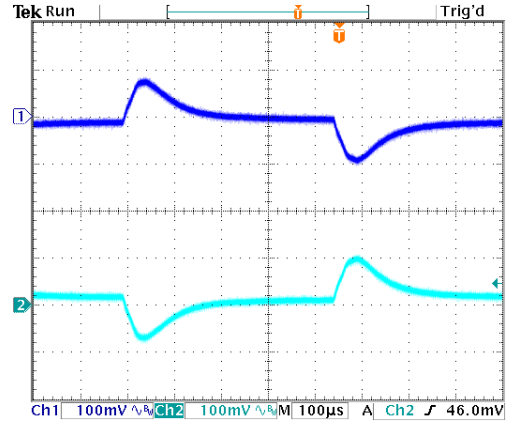

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

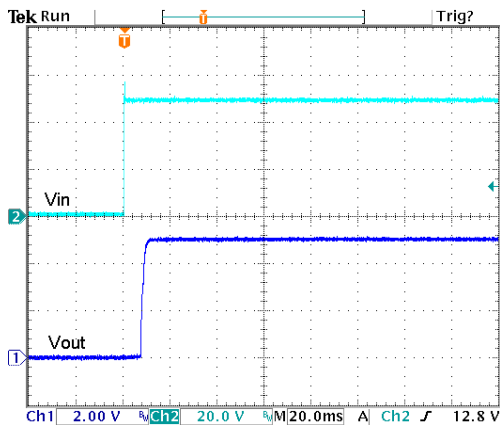

Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

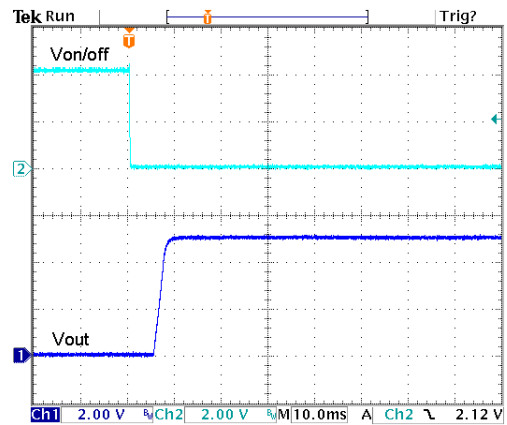


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load




**Characteristic Curves (Continued)**


All test conditions are at 25°C. The figures are identical for MOP06-48D12W

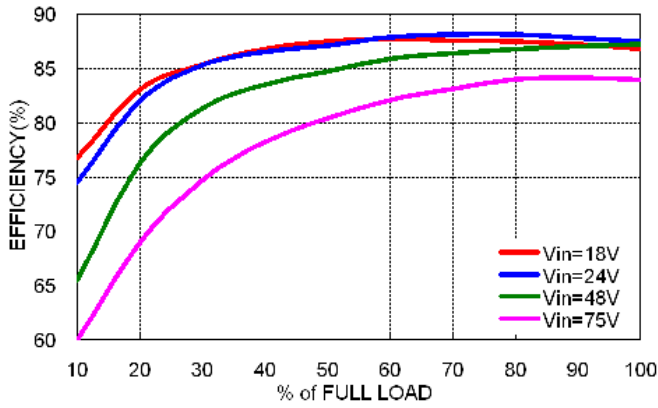


Efficiency versus Output Load

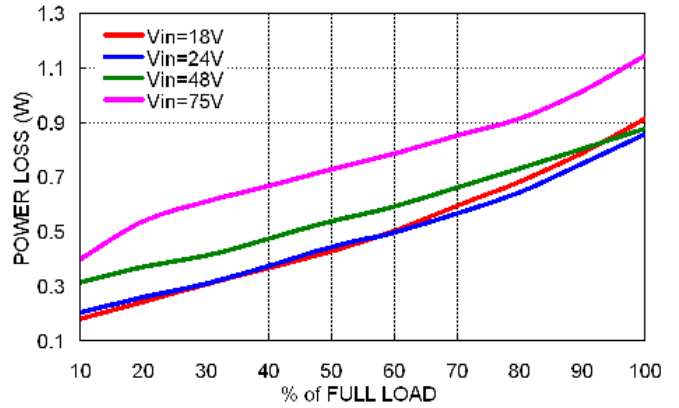

Power Dissipation versus Output Load

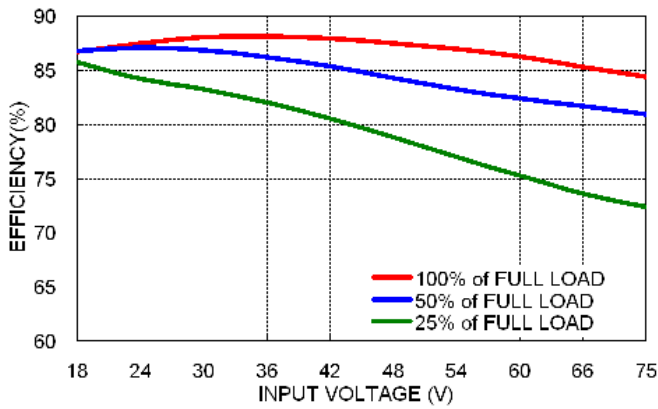


Efficiency versus Input Voltage  
Full Load

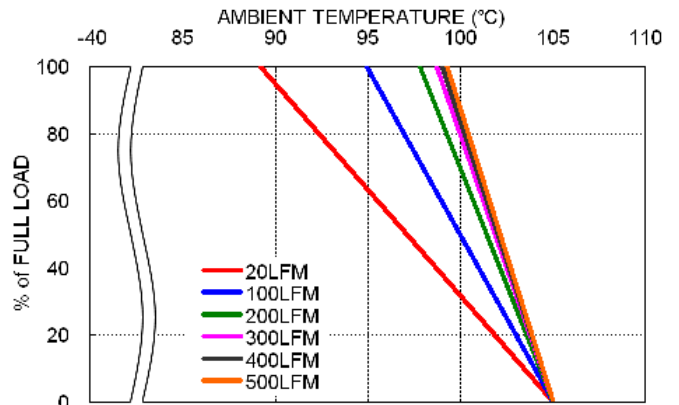


Derating Output Load versus Ambient Temperature and Airflow  
Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48D12W

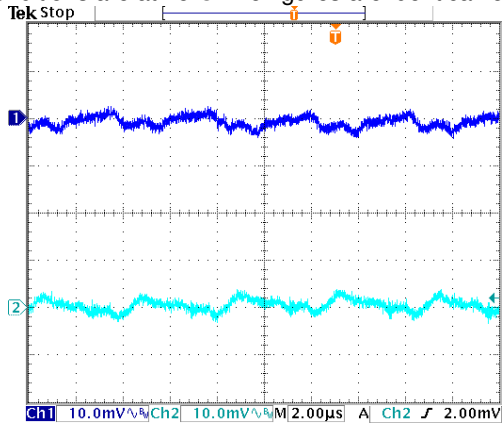


Typical Output Ripple and Noise.  
Vin(nom); Full Load

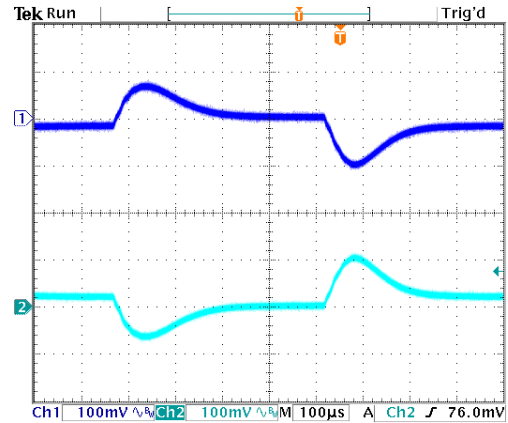

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

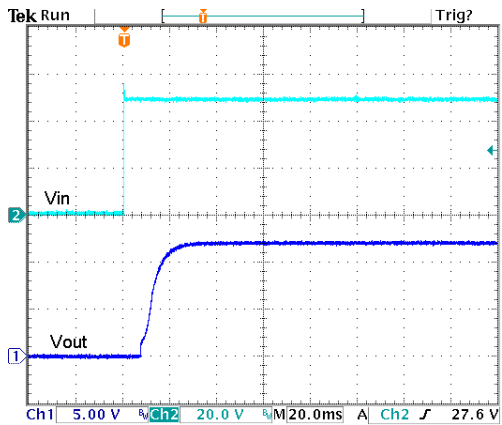


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

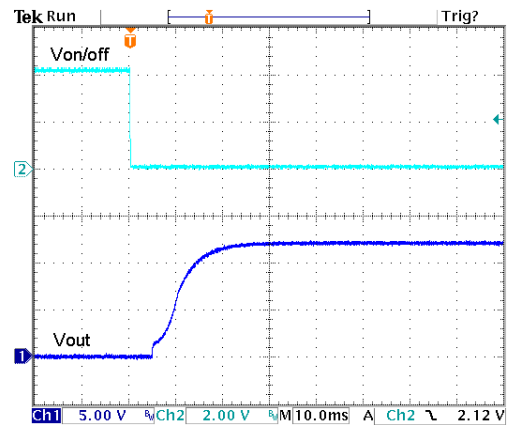


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48D15W

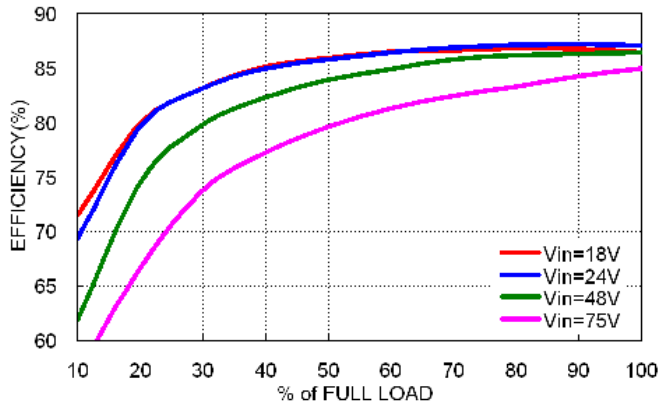


Efficiency versus Output Load

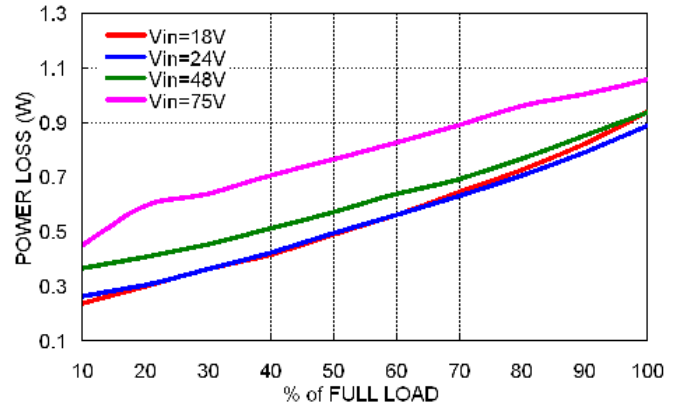

Power Dissipation versus Output Load

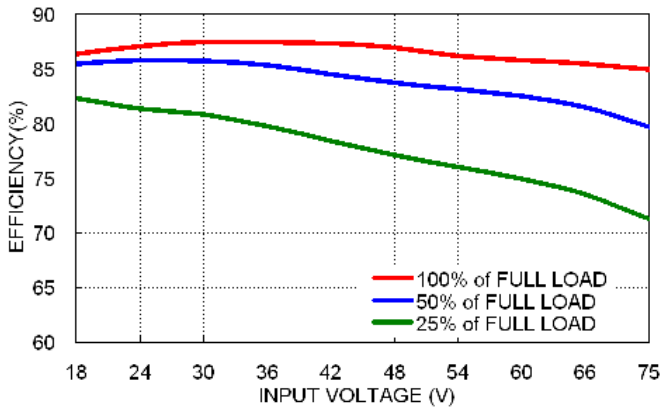


Efficiency versus Input Voltage  
Full Load

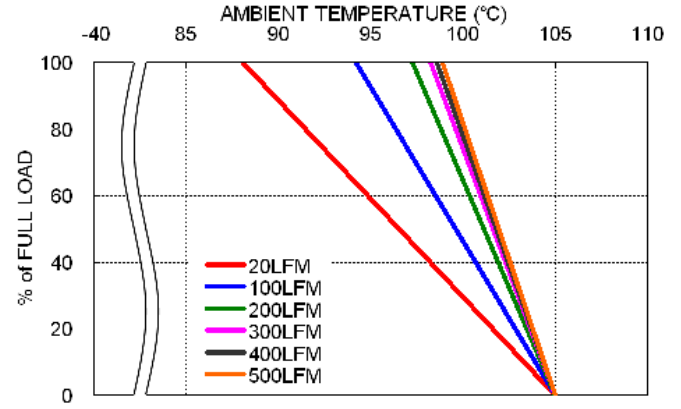


Derating Output Load versus Ambient Temperature and Airflow  
Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48D15W

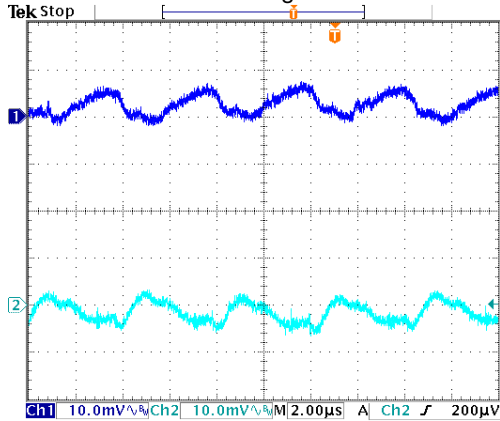


Typical Output Ripple and Noise.  
Vin(nom); Full Load

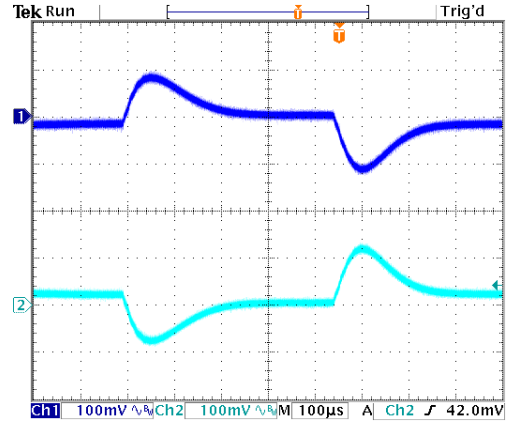

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

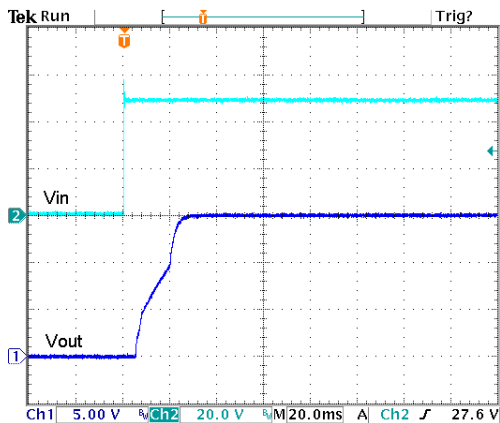


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

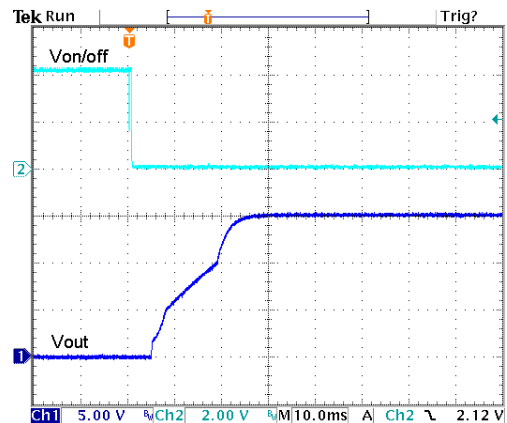


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24S3P3W

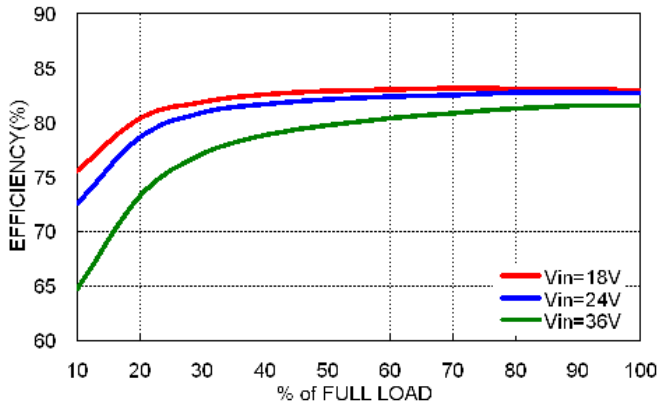


Efficiency versus Output Load

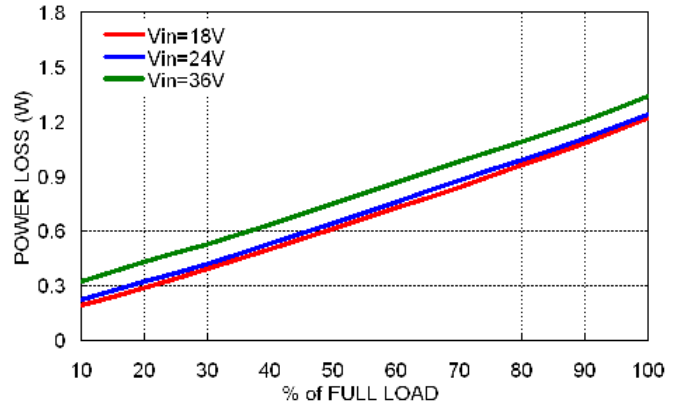

Power Dissipation versus Output Load

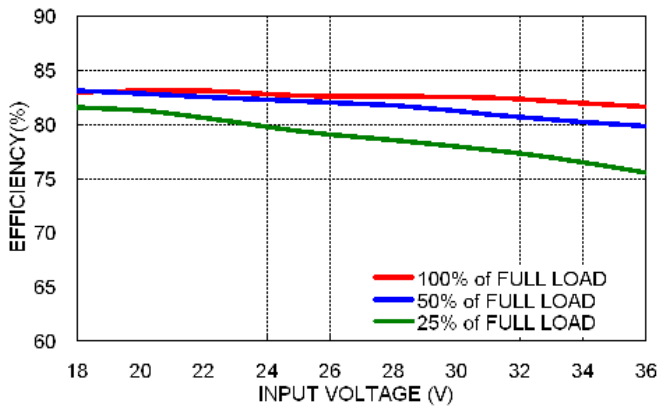


Efficiency versus Input Voltage Full Load

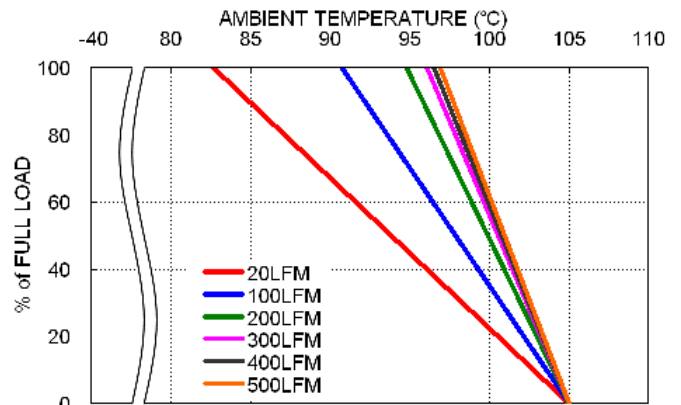


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

## Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24S3P3W

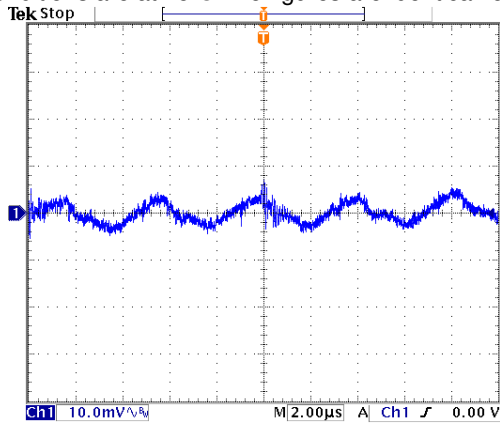


Typical Output Ripple and Noise.  
Vin(nom); Full Load

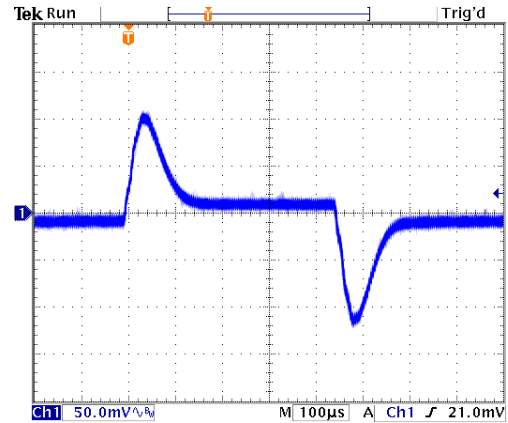

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

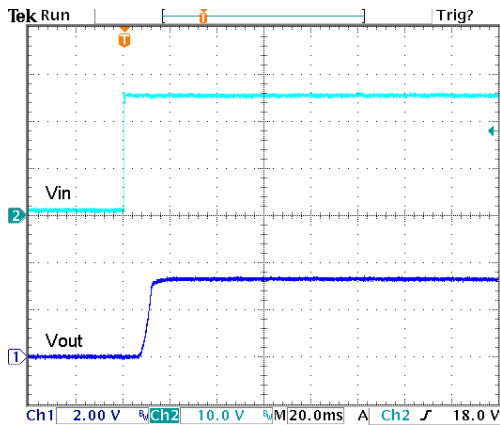


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

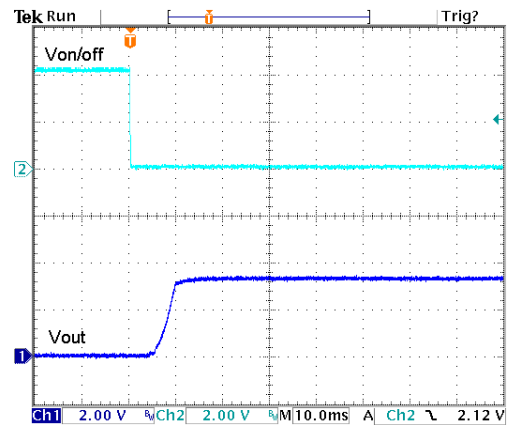


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

**Characteristic Curves (Continued)**


All test conditions are at 25°C. The figures are identical for MOP06-24S05W

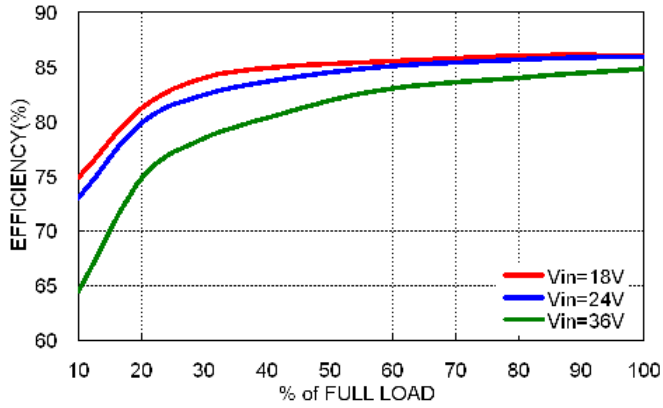


Efficiency versus Output Load

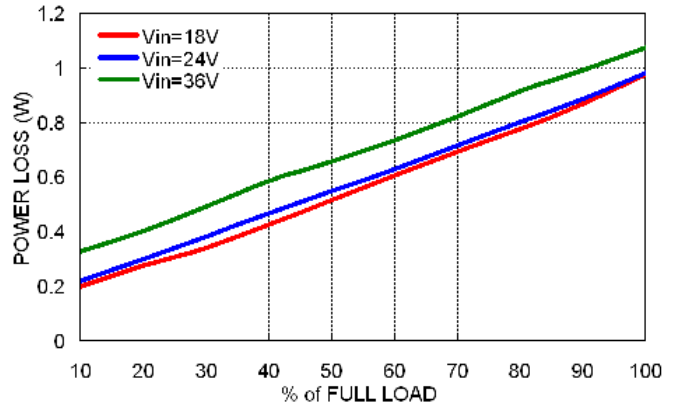

Power Dissipation versus Output Load

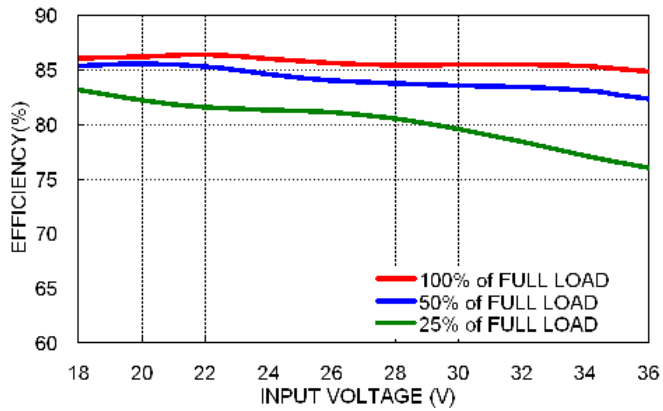


Efficiency versus Input Voltage  
Full Load

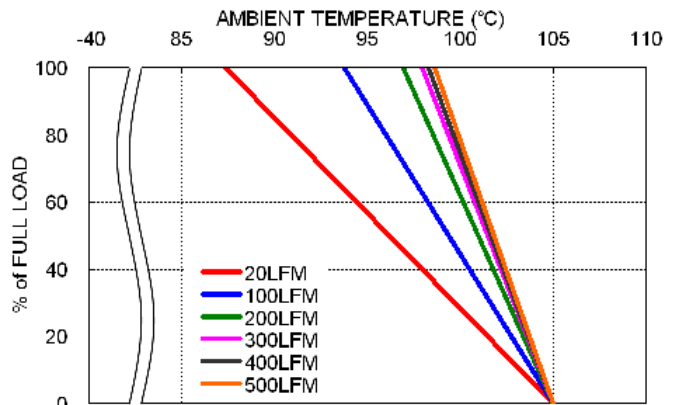


Derating Output Load versus Ambient Temperature and Airflow  
Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24S05W

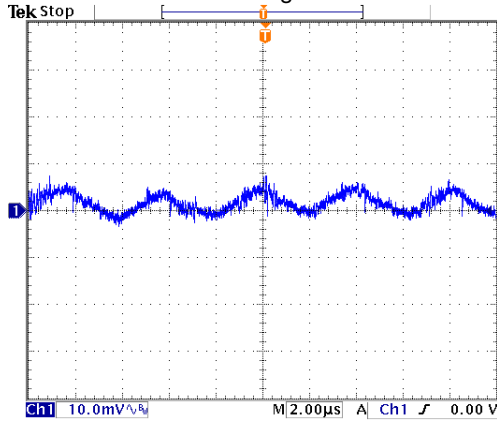


Typical Output Ripple and Noise.  
Vin(nom); Full Load

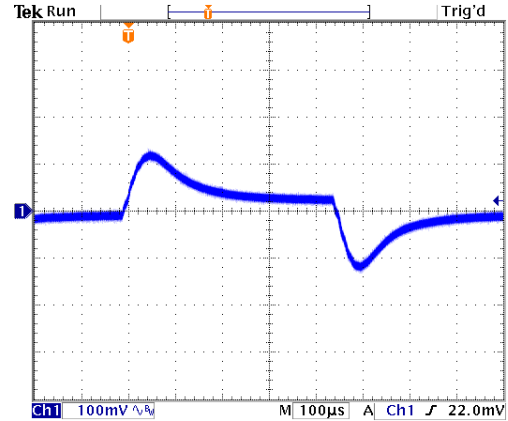

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

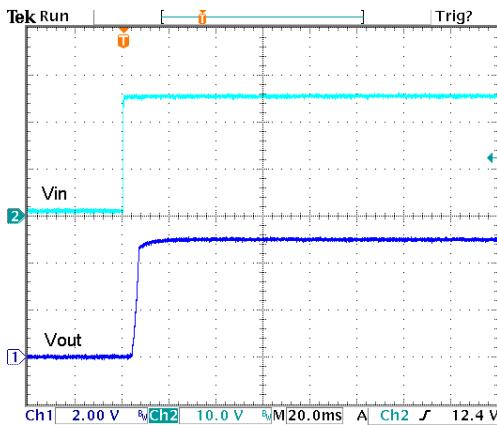

Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

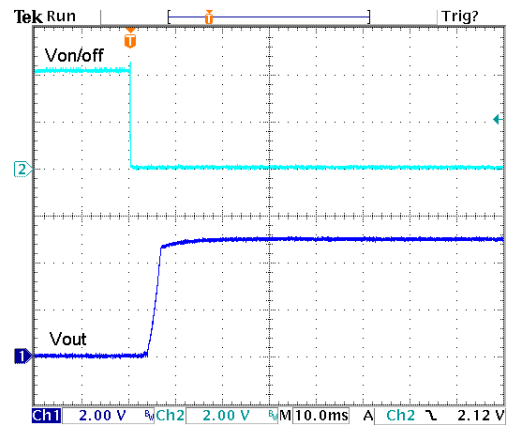


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load




**Characteristic Curves (Continued)**


All test conditions are at 25°C. The figures are identical for MOP06-24S12W

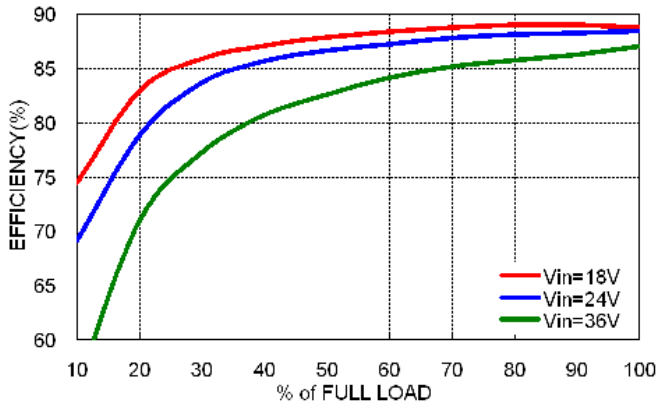


Efficiency versus Output Load

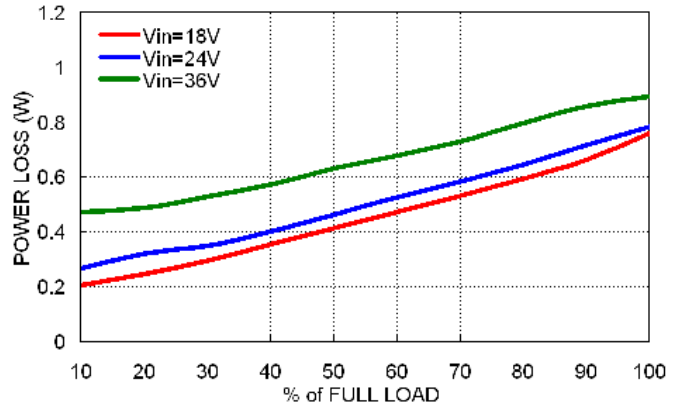

Power Dissipation versus Output Load

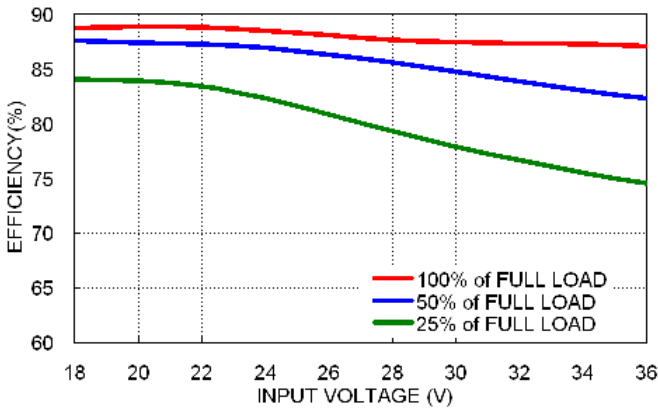


Efficiency versus Input Voltage Full Load

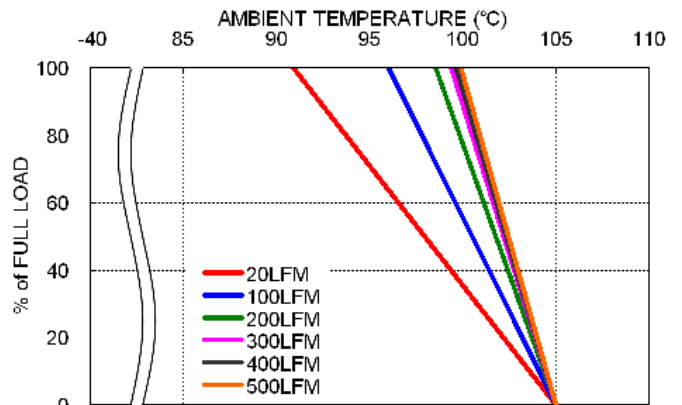


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24S12W

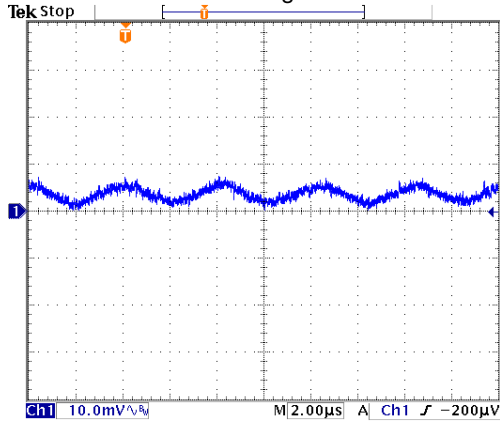


Typical Output Ripple and Noise.  
Vin(nom); Full Load

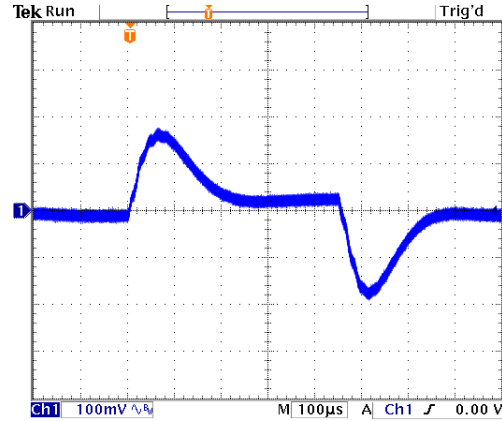

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

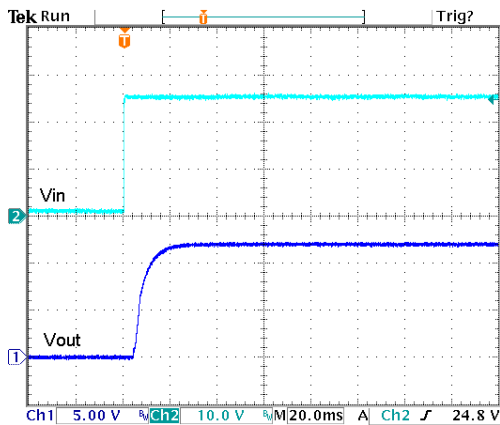


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

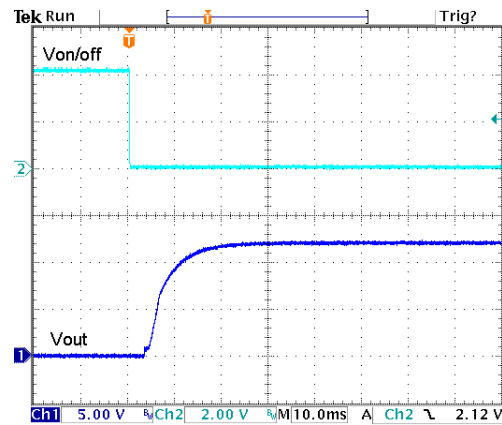


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24S15W

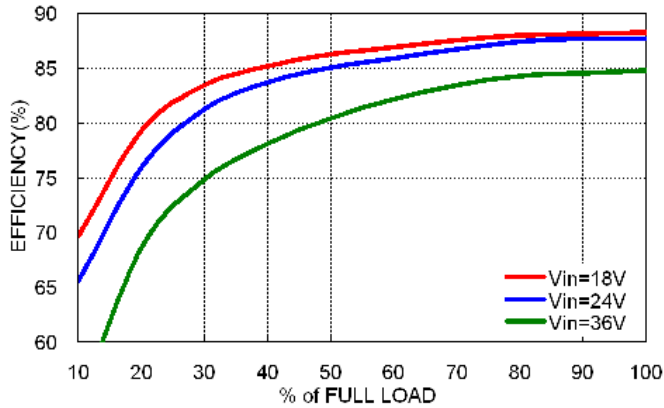


Efficiency versus Output Load

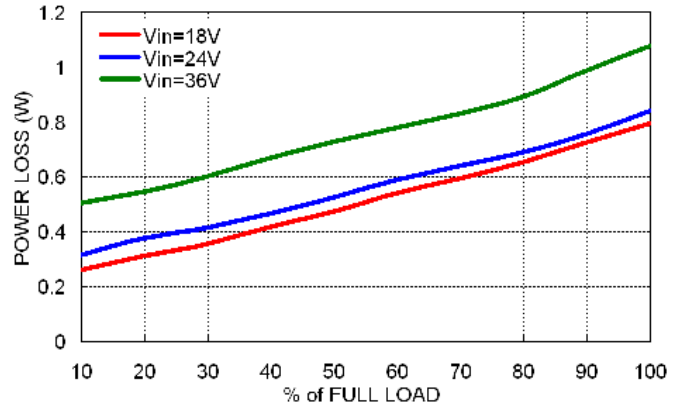

Power Dissipation versus Output Load

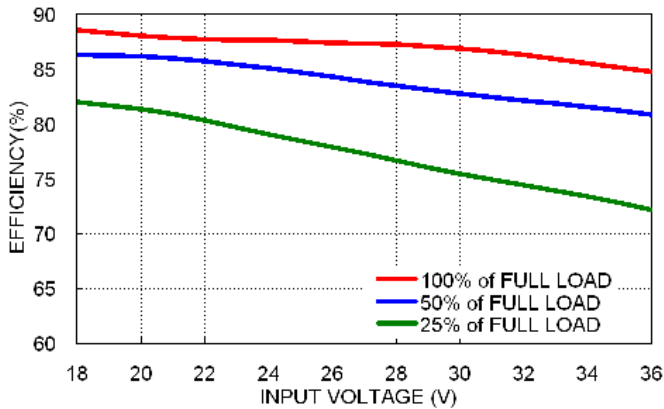


Efficiency versus Input Voltage Full Load

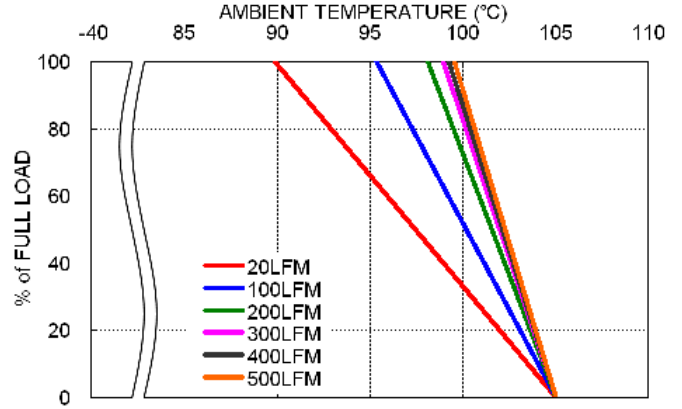


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24S15W

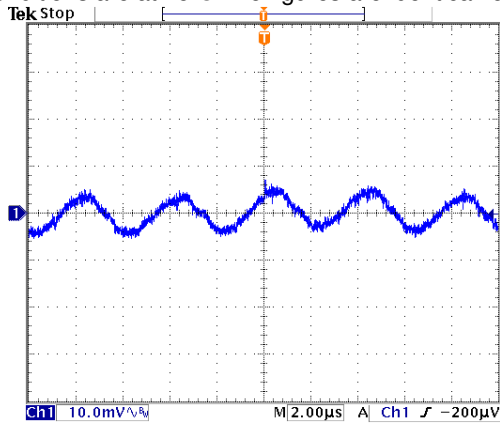


Typical Output Ripple and Noise.  
Vin(nom); Full Load

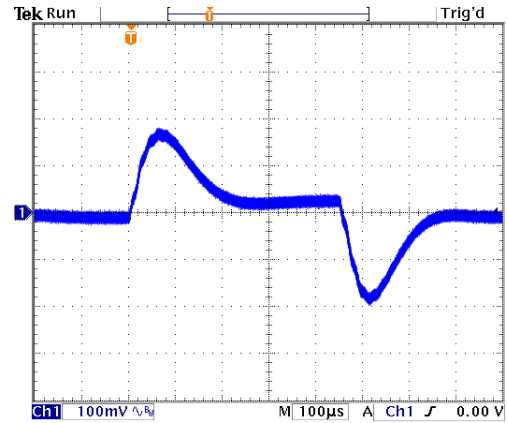

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

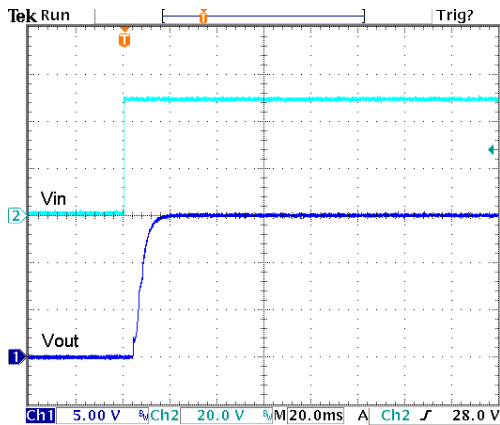


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

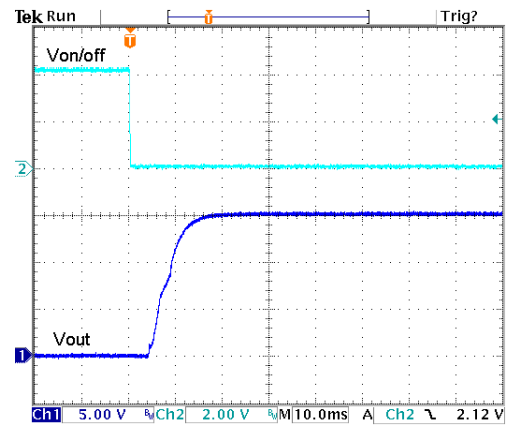


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24S24W

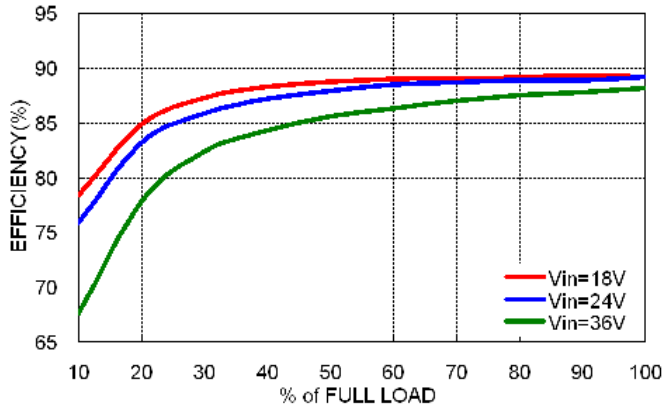


Efficiency versus Output Load

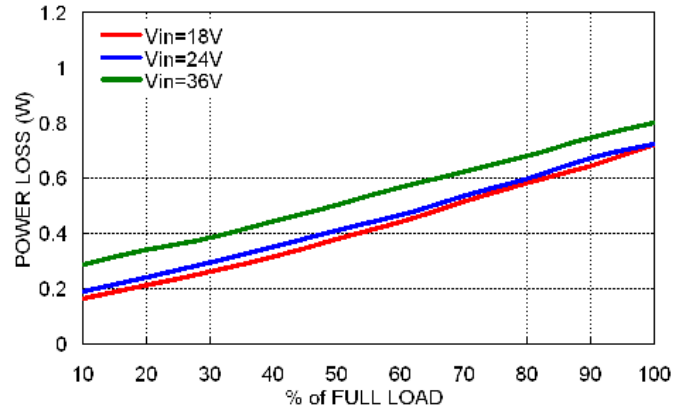

Power Dissipation versus Output Load

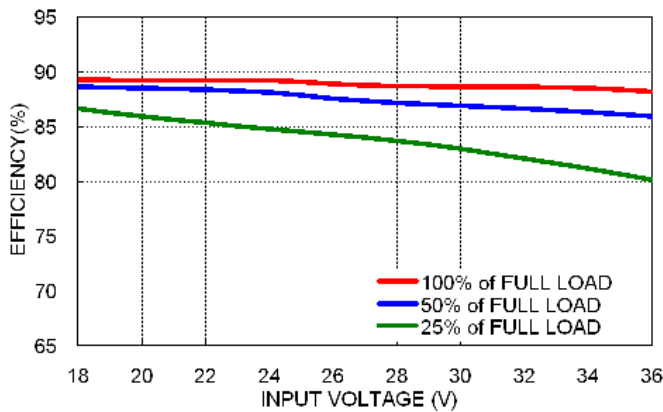


Efficiency versus Input Voltage Full Load

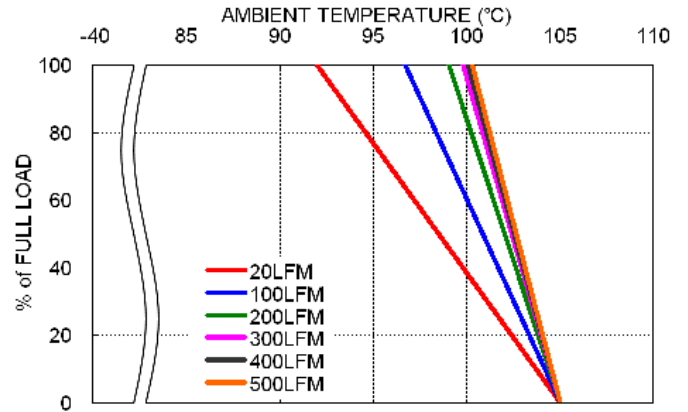


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-24S24W

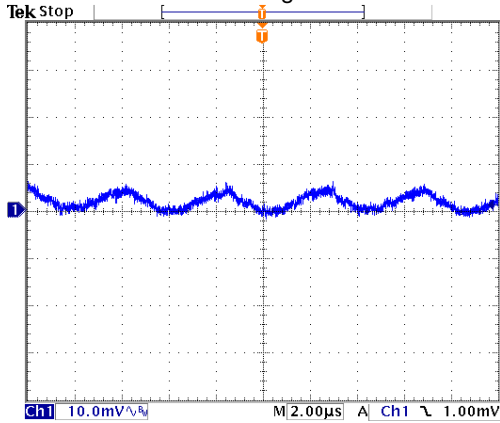


Typical Output Ripple and Noise.  
Vin(nom); Full Load

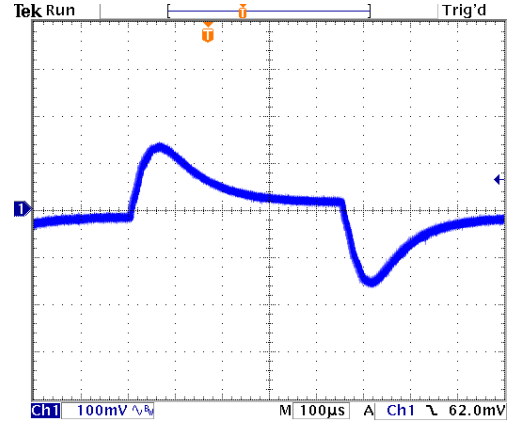

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

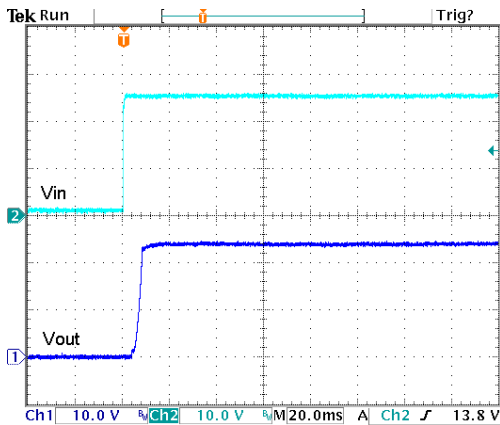


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

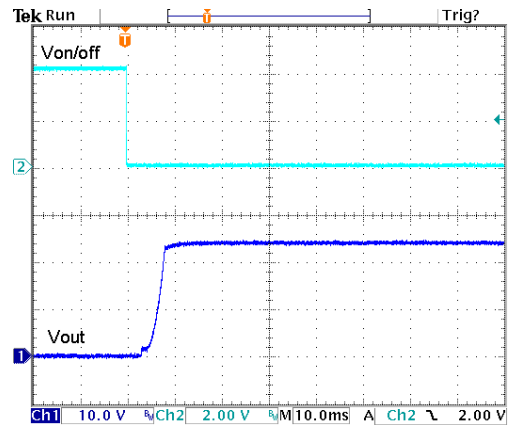


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MOP06-48S3P3W

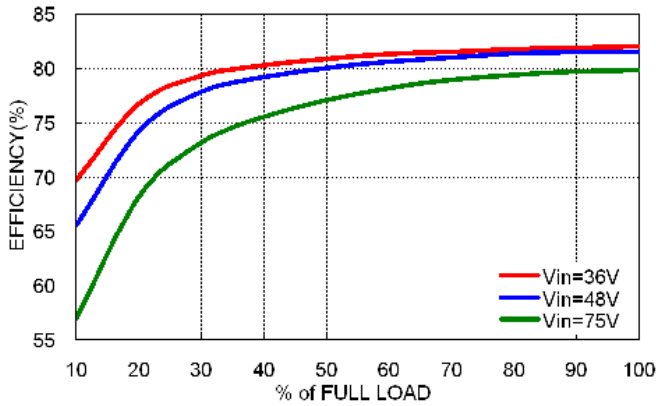


Efficiency versus Output Load

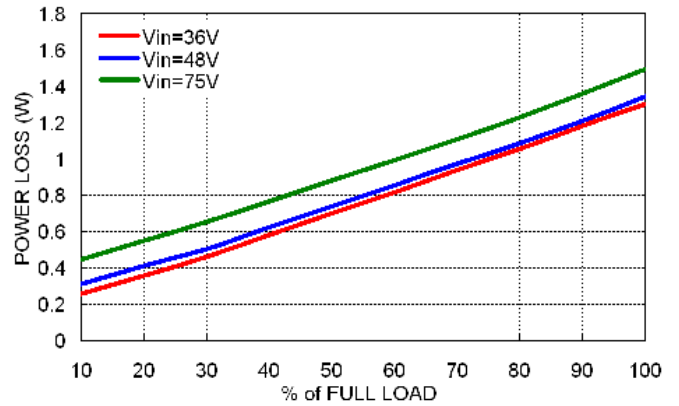

Power Dissipation versus Output Load

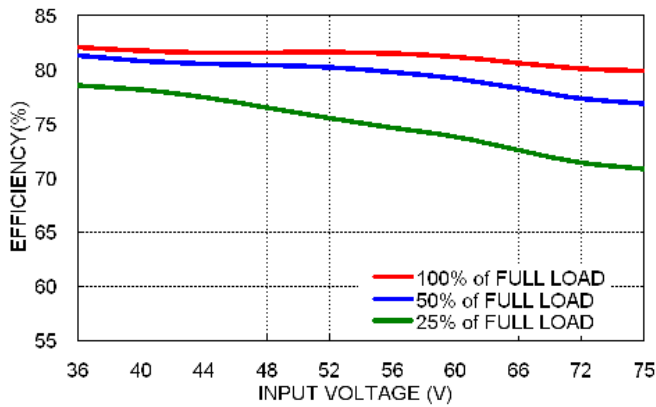


Efficiency versus Input Voltage Full Load

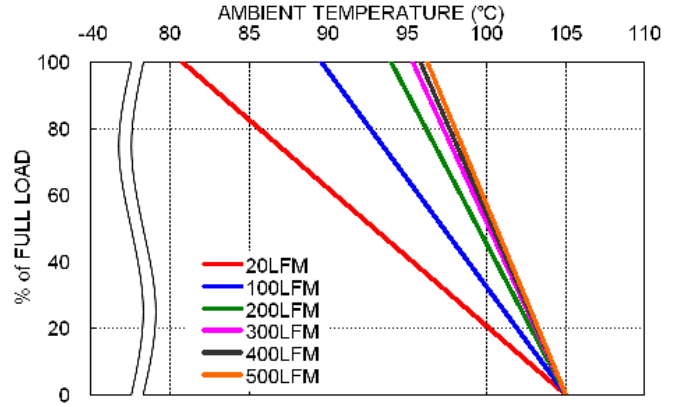


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48S3P3W

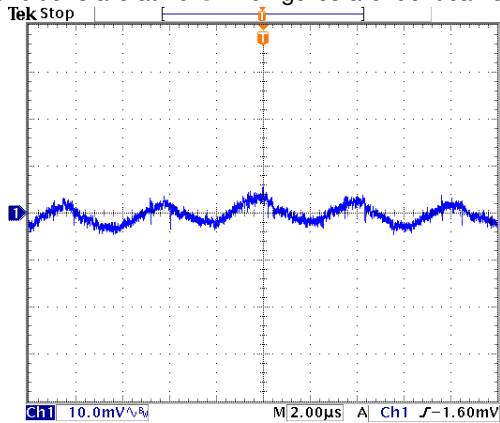


Typical Output Ripple and Noise.  
Vin(nom); Full Load

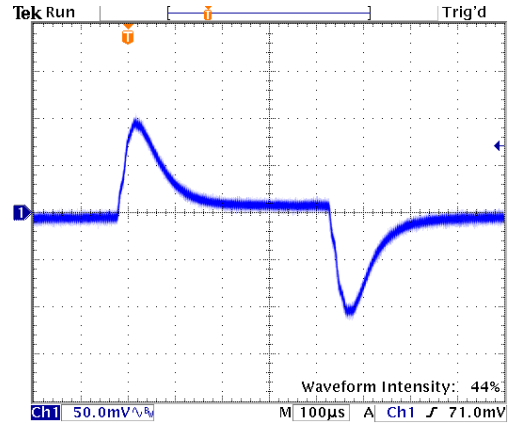

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

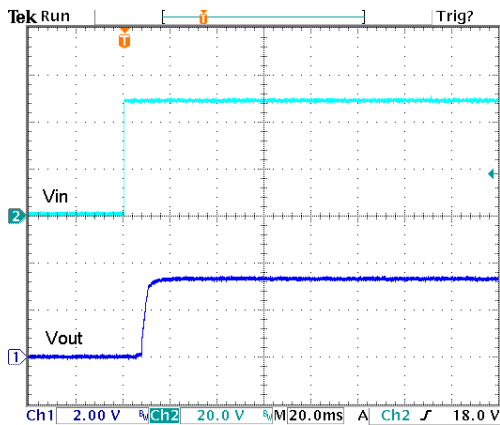

Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

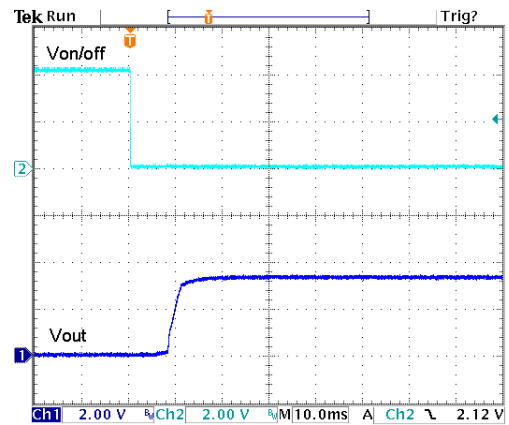


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load




Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48S05W

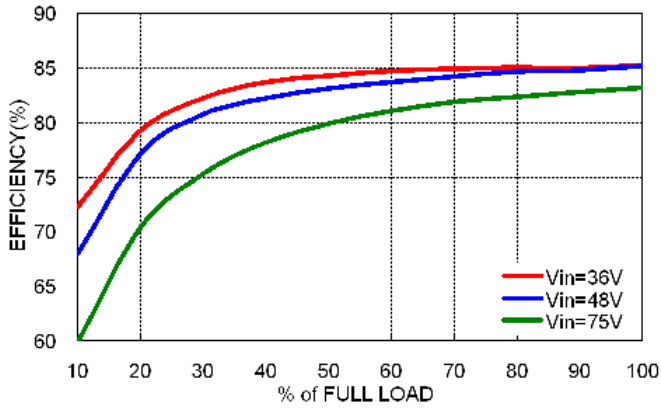


Efficiency versus Output Load

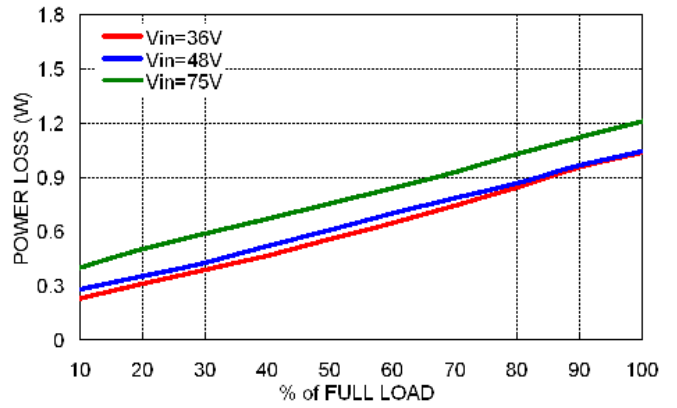

Power Dissipation versus Output Load

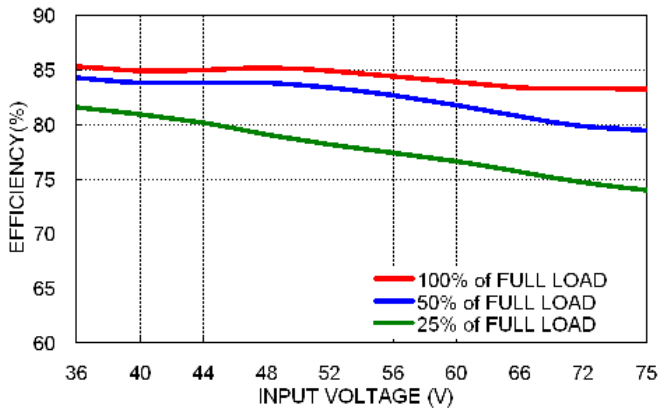


Efficiency versus Input Voltage Full Load

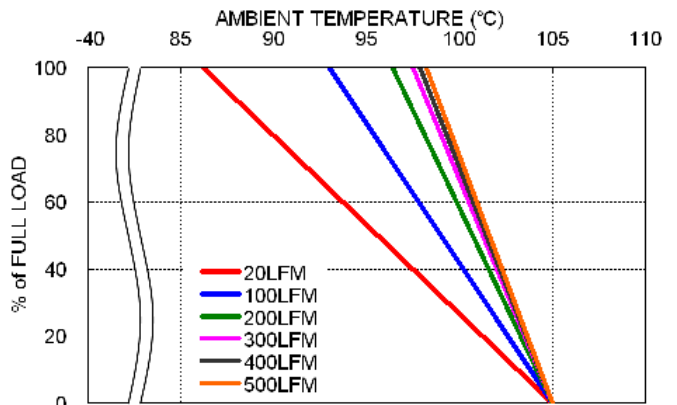


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

## Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48S05W

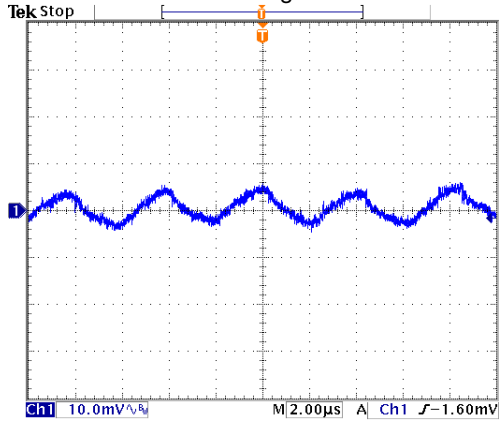


Typical Output Ripple and Noise.  
Vin(nom); Full Load

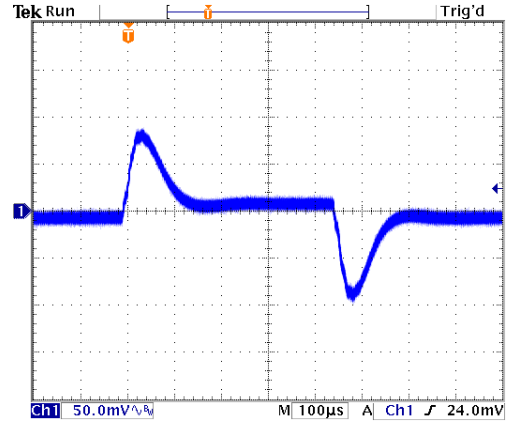

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

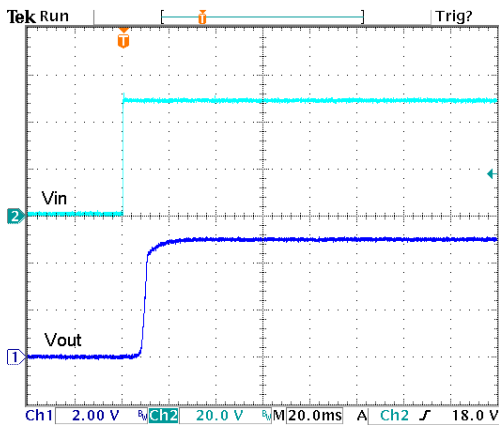


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

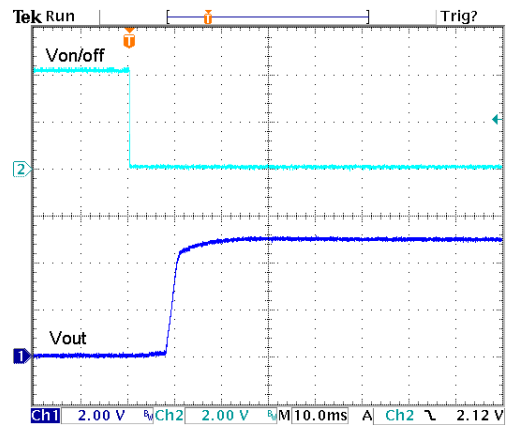


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

**Characteristic Curves (Continued)**


All test conditions are at 25°C. The figures are identical for MOP06-48S12W

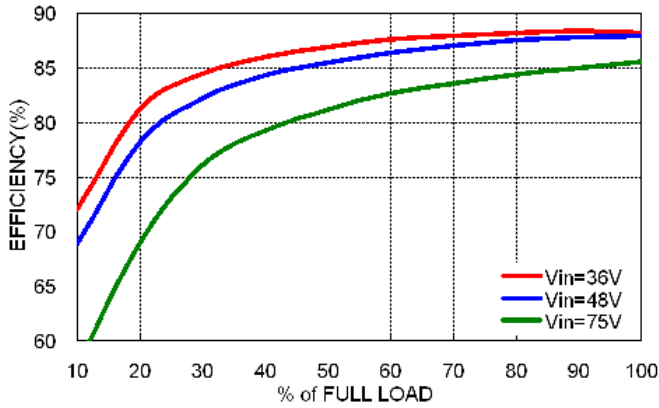


Efficiency versus Output Load

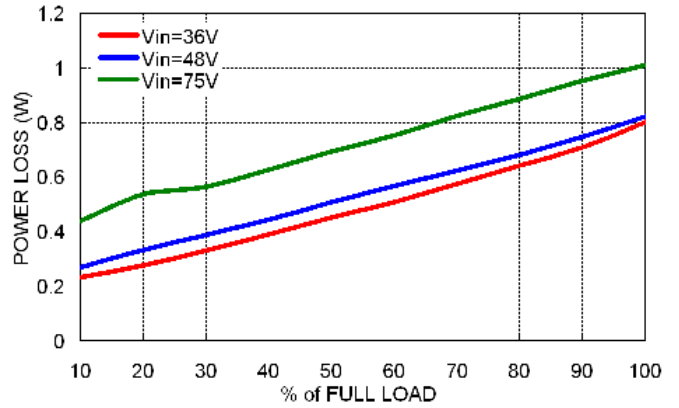

Power Dissipation versus Output Load

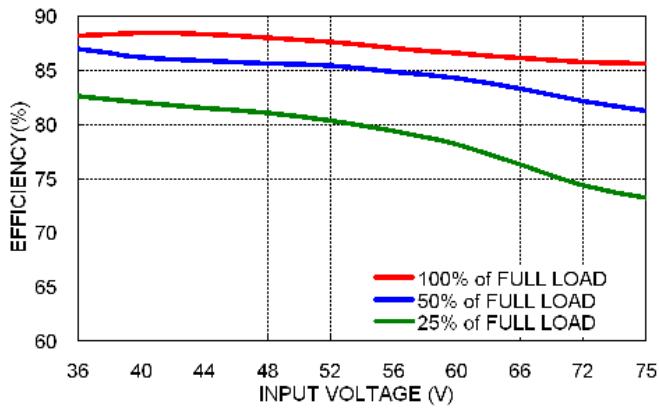


Efficiency versus Input Voltage Full Load

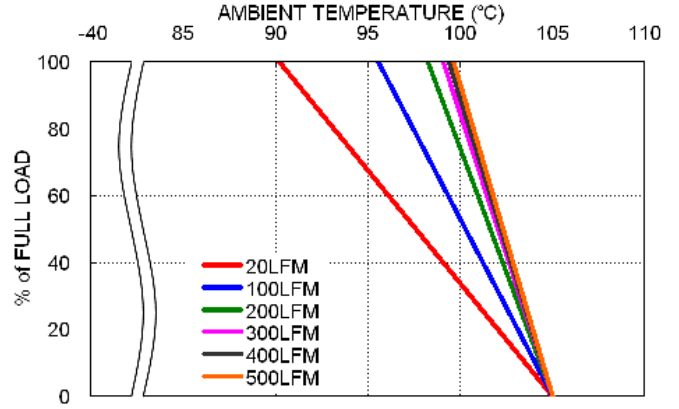


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48S12W

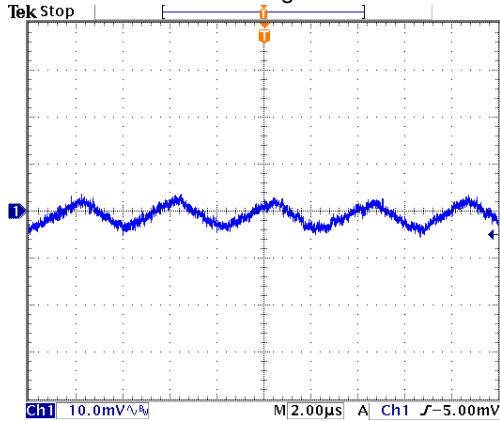


Typical Output Ripple and Noise.  
Vin(nom); Full Load

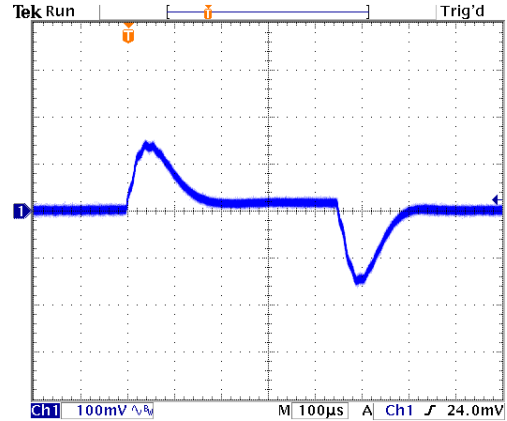

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

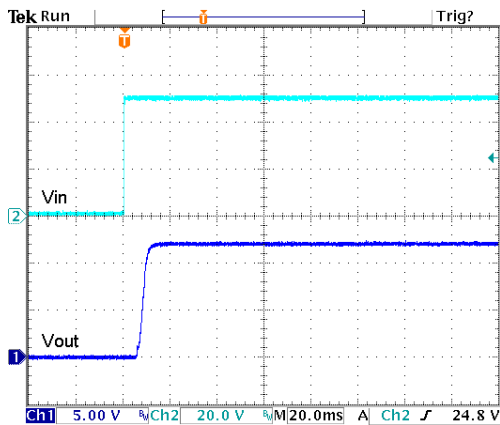


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

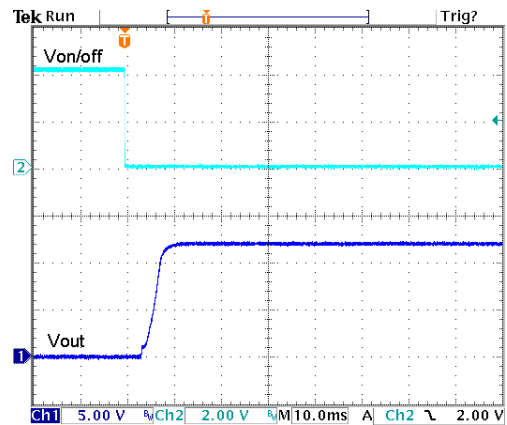


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48S15W

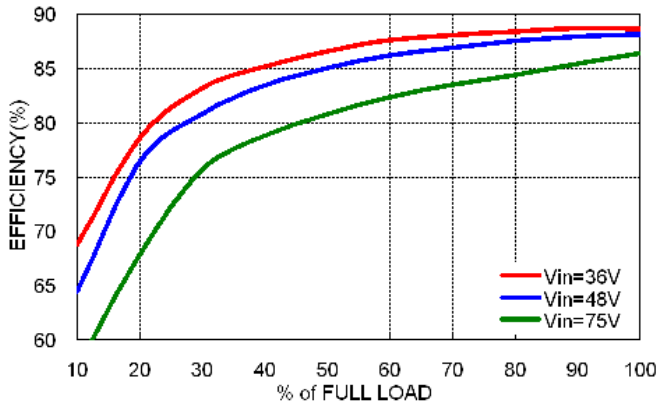


Efficiency versus Output Load

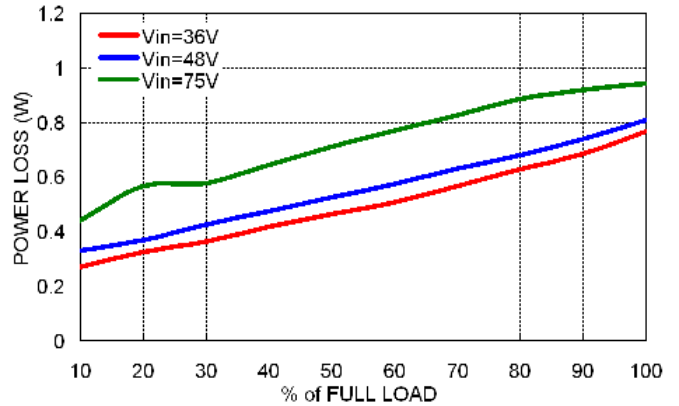

Power Dissipation versus Output Load

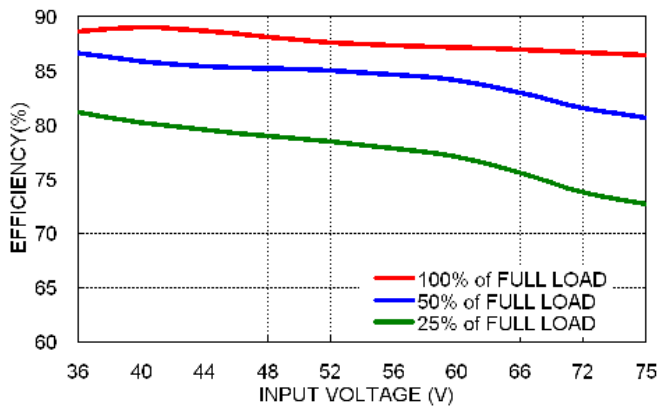


Efficiency versus Input Voltage Full Load

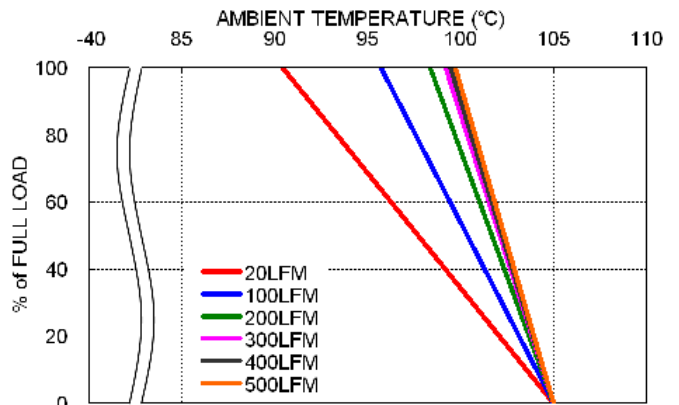


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48S15W

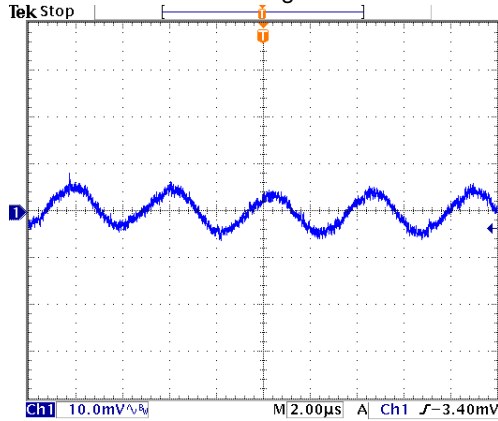


Typical Output Ripple and Noise.  
Vin(nom); Full Load

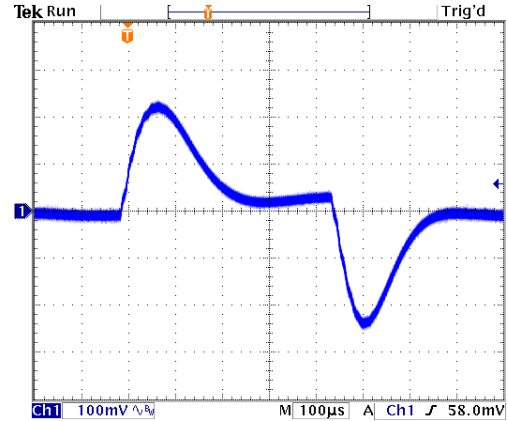

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

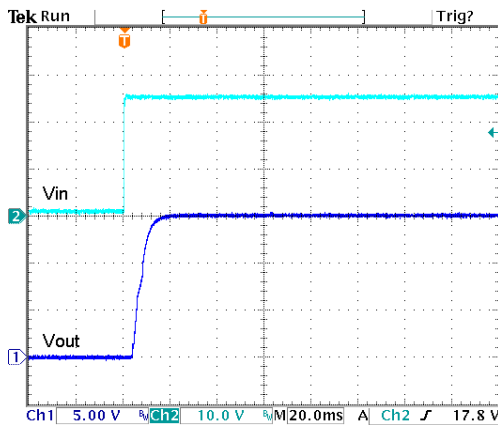


Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

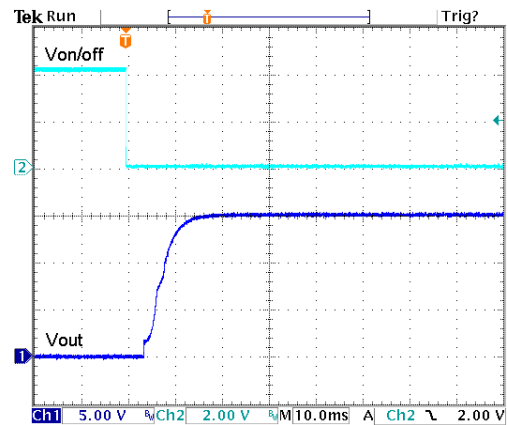


Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

**Characteristic Curves (Continued)**


All test conditions are at 25°C. The figures are identical for MOP06-48S24W

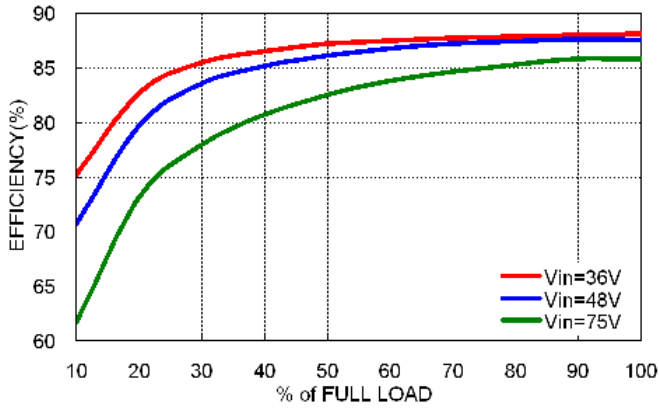


Efficiency versus Output Load

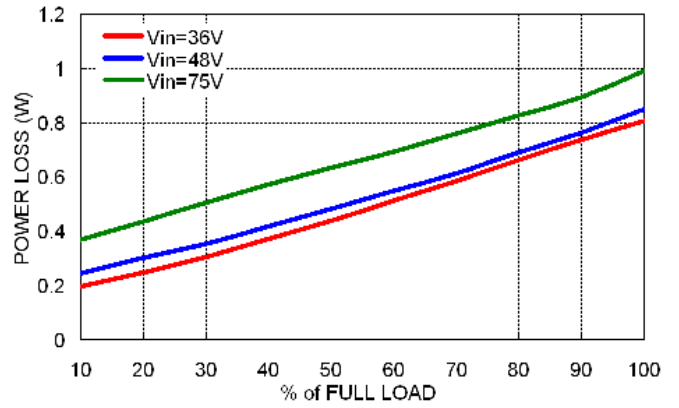

Power Dissipation versus Output Load

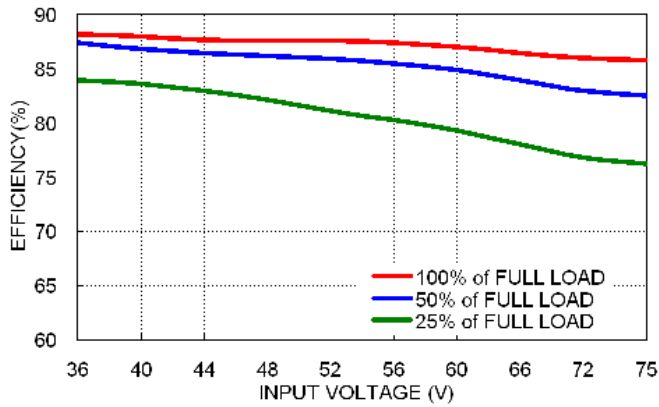


Efficiency versus Input Voltage Full Load

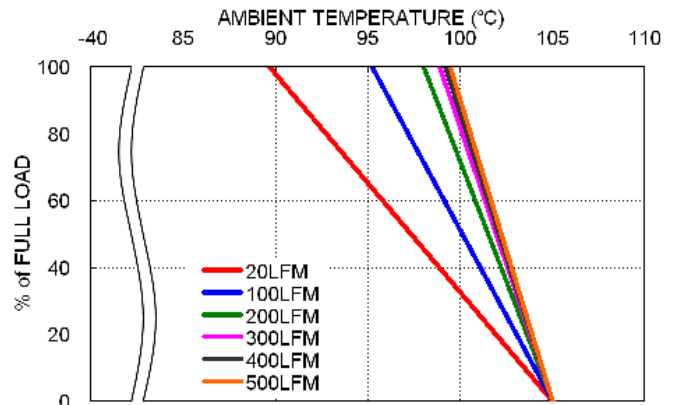


Derating Output Load versus Ambient Temperature and Airflow Vin(nom)

Characteristic Curves (Continued)


All test conditions are at 25°C. The figures are identical for MOP06-48S24W

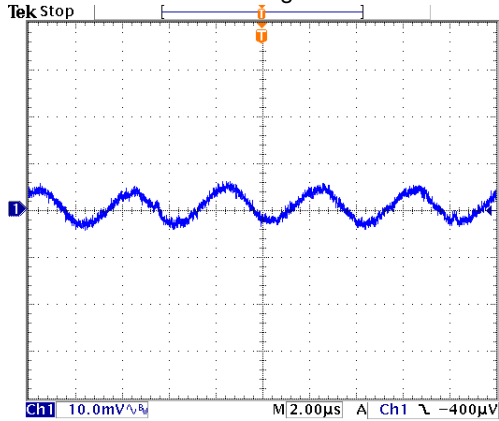


Typical Output Ripple and Noise.  
Vin(nom); Full Load

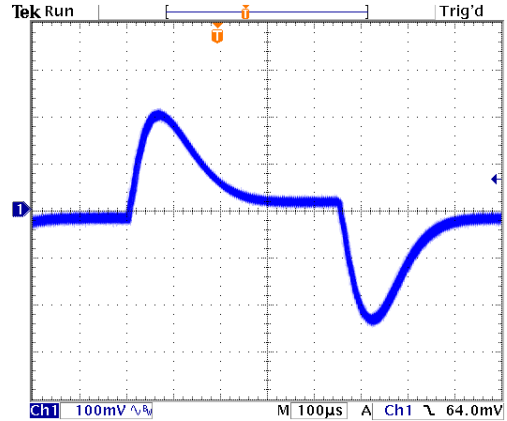

Transient Response to Dynamic Load Change from  
100% to 75% to 100% of Full Load; Vin(nom)

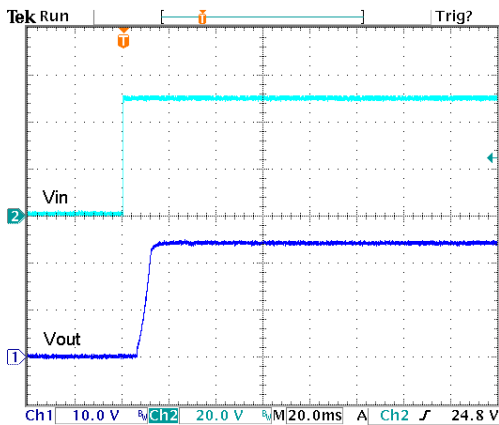

Typical Input Start-Up and Output Rise Characteristic  
Vin(nom); Full Load

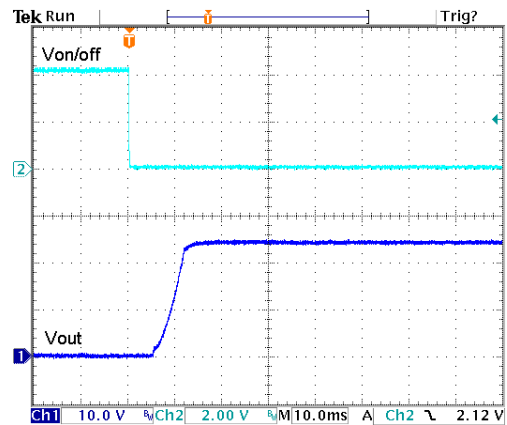

Using ON/OFF Voltage Start-Up and Output Rise Characteristic  
Vin(nom); Full Load