

RBW - 3W Series

3W 4:1 Regulated Single & Dual output

Features

- 8 Pin SIL
- Wide 4:1 Input Range
- Full SMD Technology
- 1600 VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 82%
- -40°C ~ 85°C Operation Temperature Range
- Remote on/off Control



The RBW series is a family of cost effective and high performed 3W single & dual output DC-DC converters. These converters are built in non-conductive black plastic package in a 8-pin SIL miniature compact case with high performance features wide range devices operate over 4:1 input voltage range providing stable output voltage which is much smaller than package of DIL 24- Same power rating but only 43% of the traditional volume. Devices are encapsulated using flame retardant resin. Input voltages of 12, 24, 48 with output voltage of 3.3, 5, 12, 15, ± 5 , ± 12 , ± 15 Vdc. High performance features include high efficiency operation up to 82% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage Accuracy	$\pm 1\%$, max.	Case Material	Non conductive black plastic
Maximum Output Current	See table, max.	Potting Material	Silicon (UL94V-0 rated)
Line Regulation	$\pm 0.2\%$, max.	Pin Material	C5191R-H Solder-coated
Load Regulation	Single (From 0% to 100% Load) $\pm 1.0\%$, max. Dual (From 10% to 100% Load) $\pm 1.0\%$, max.	Weight	4.5g, typ.
Cross Regulation (Dual Output) (1)	$\pm 5\%$	Dimensions	0.86"x0.36"x0.44"
Ripple & Noise (20 Mhz bandwidth)(2)	30mVpk-pk, max.	ENVIRONMENT SPECIFICATIONS	
Short Circuit Protection	Indefinite (Automatic Recovery)	Operating Temperature	-40°C ~ +71°C
Temperature Coefficient	$\pm 0.02\%/^{\circ}\text{C}$	Maximum Case Temperature	100°C
Capacitive Load(3)	See table, max.	Storage Temperature	-40°C~125°C
Transient Recovery Time (4)	250 μs , typ.	Cooling	Nature Convection
Transient Response Deviation(4)	$\pm 3\%$, max.	ABSOLUTE MAXIMUM RATINGS(6)	
INPUT SPECIFICATIONS		These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Voltage Range	See table	Input Surge Voltage(100ms max.)	
Start up Time(Nominal Vin and constant resistive load)	30mS, typ.	12 Models	25Vdc, max.
Input Current (No Load)	See table, max.	24 Models	50Vdc, max.
Input Current (Full Load)	See table, typ.	48 Models	100Vdc, max.
Input Filter	Capacitor	Soldering Temperature	260°C max.
Input Reflected Ripple Current(5)	20mA pk-pk, typ.	(1.5mm from case 10sec max.)	
Remote on/off		EMC SPECIFICATIONS	
ON:	open or high impedance	Radiated Emissions	EN55032 CLASS A
OFF:	2-4mA input current (via 1K)	Conducted Emissions (7)	EN55032 CLASS A
Off stand by input current(Nominal Vin)	2.5mA, max.	ESD	IEC 61000-4-2 Perf. Criteria A
GENERAL SPECIFICATIONS		RS	IEC 61000-4-3 Perf. Criteria A
Efficiency	See table, typ.	EFT (8)	IEC 61000-4-4 Perf. Criteria A
I/O Isolation Voltage (60sec)	1600Vdc	Surge (8)	IEC 61000-4-5 Perf. Criteria A
I/O Isolation Capacity	200 pF, max.	CS	IEC 61000-4-6 Perf. Criteria A
I/O Isolation Resistance	1000M Ohm, min.	PfMF	IEC 61000-4-8 Perf. Criteria A
Switching Frequency	100kHz, min.		
Humidity	95%relH		
Reliability Calculated MTBF (MIL-HDBK-217 F)	>1.7Mhrs@25°C		
Safety Standard	IEC/EN 60950-1, 62368-1		
Safety Approvals	IEC/EN 60950-1, 62368-1		

RBW - 3W 4:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

RBW - **24** **05** **SD** **3**

Series Name
W:wide range

Input Voltage Range

12 - 4.5 ~ 18V

24 - 9 ~ 36V

48 - 18 ~ 75V

Case Type

S - SIP Single Output

SD - SIP Dual Output

Nominal Output Voltage


3R3 - 3.3V

05 - 5V

12 - 12V

15 - 15V

Watt

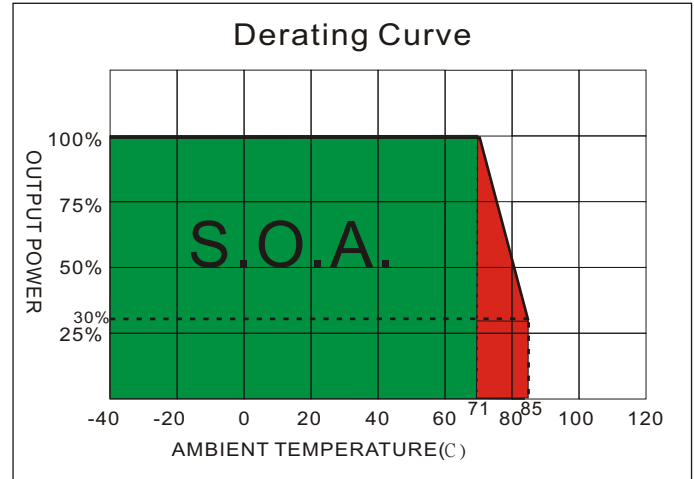

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @FL (μF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
RBW-123R3S3	4.5-18	40	268	3.3	0	700	72	1760μF
RBW-1205S3	4.5-18	40	325	5	0	600	77	1000μF
RBW-1212S3	4.5-18	40	309	12	0	250	81	170μF
RBW-1215S3	4.5-18	40	309	15	0	200	81	110μF
RBW-1205SD3	4.5-18	40	325	±5	0	±300	77	±470μF
RBW-1212SD3	4.5-18	40	313	±12	0	±125	80	±100μF
RBW-1215SD3	4.5-18	40	313	±15	0	±100	80	±47μF
RBW-243R3S3	9-36	25	129	3.3	0	700	75	1760μF
RBW-2405S3	9-36	25	159	5	0	600	79	1000μF
RBW-2412S3	9-36	30	153	12	0	250	82	170μF
RBW-2415S3	9-36	30	153	15	0	200	82	110μF
RBW-2405SD3	9-36	30	159	±5	0	±300	79	±470μF
RBW-2412SD3	9-36	35	159	±12	0	±125	79	±100μF
RBW-2415SD3	9-36	35	157	±15	0	±100	80	±47μF
RBW-483R3S3	18-75	15	66	3.3	0	700	74	1760μF
RBW-4805S3	18-75	15	81	5	0	600	78	1000μF
RBW-4812S3	18-75	15	79	12	0	250	80	170μF
RBW-4815S3	18-75	15	78	15	0	200	81	110μF
RBW-4805SD3	18-75	15	80	±5	0	±300	79	±470μF
RBW-4812SD3	18-75	15	80	±12	0	±125	79	±100μF
RBW-4815SD3	18-75	15	80	±15	0	±100	79	±47μF


NOTE

1. One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
2. Measured with a 1μF ceramic capacitor.
3. Test by minimal Vin and constant resistive load.
4. Test by normal Vin and 100%-25% load, 25% load step change.
5. Measured Input reflected ripple current with a simulated source inductance of 12μH and a source capacitor Cin(47μF, ESR<1.0Ω at 100KHz).
6. Exceeding the absolute ratings of the unit could cause damage. It's not allowed for continuous operating ratings.
7. Input filter components are required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
8. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.
The filter capacitor Motien suggest: Nippon - chemi - con KY series, 220μF/100V.

TEST CONFIGURATIONS

Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} ($12\mu H$) and a source capacitor C_{in} ($47\mu F$, $ESR < 1.0\Omega$ at $100KHz$) at nominal input and full load.


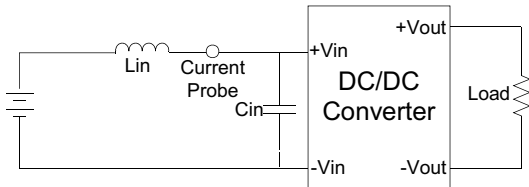


EMI Filter


Input filter components (C_1 , L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

Output Ripple & Noise Measurement Test


Use a capacitor C_{out} ($1.0\mu F$) measurement. The Scope measurement bandwidth is $0-20MHz$.

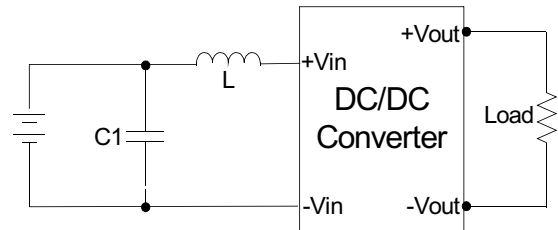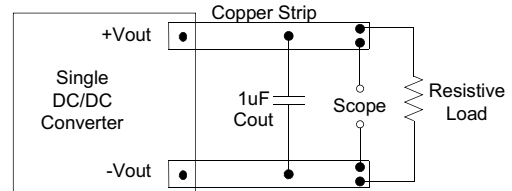

	C1	L
RBW-12XXXXXX	1210 10uF/35V	2.5uH
RBW-24XXXXXX	1210 2.2uF/100V	10uH
RBW-48XXXXXX	1210 2.2uF/100V	18uH

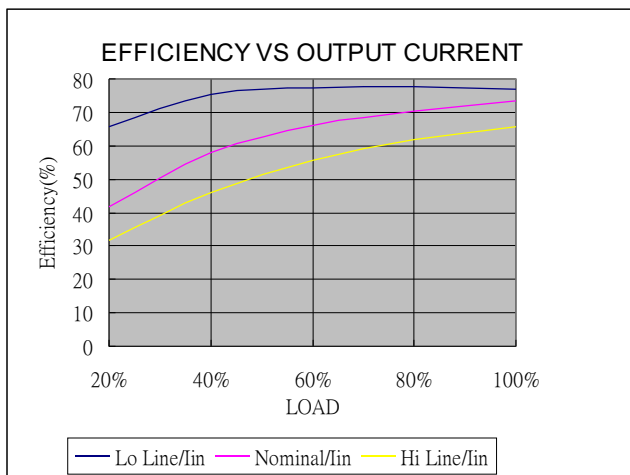


RBW-123R3S3

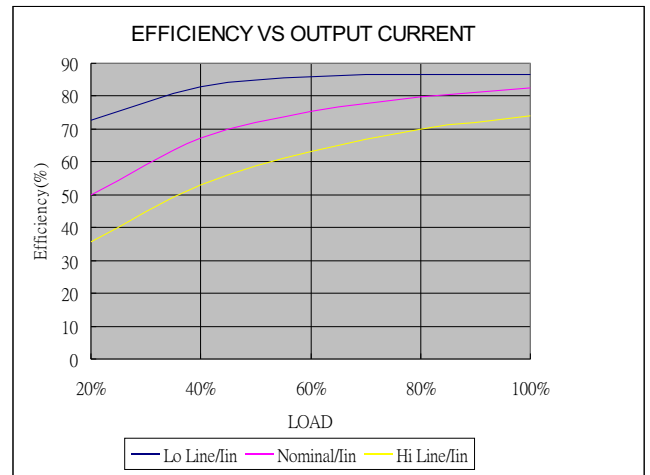

RBW-4815S3

MECHANICAL SPECIFICATIONS

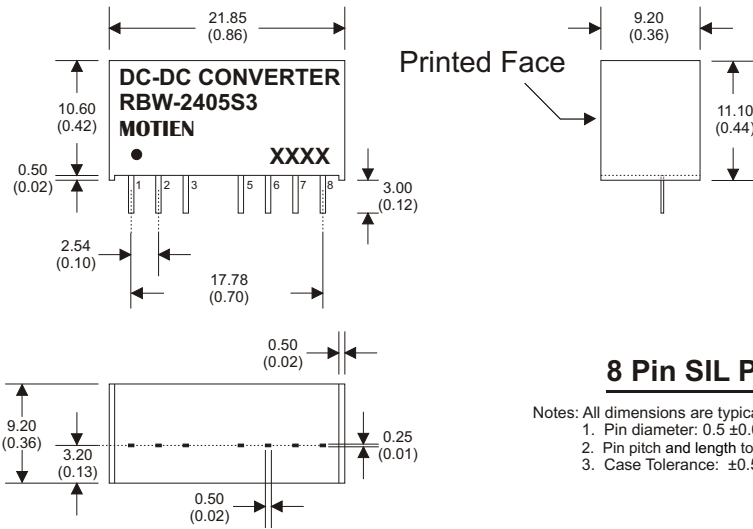

8 Pin SIL Package

- Notes: All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	-V Input	-V Input
2	+V Input	+V Input
3	Remote On/Off	Remote On/Off
5	N.C.	N.C.
6	+V Output	+V Output
7	-V Output	Common
8	N.C.	-V Output