

RACM16E-K/277 Series / AC-DC Power Supply

16W / Universal Input 100V-277VAC


FEATURES

- CV/CC: constant voltage; constant current limited
- 100-277VAC input range with full load up to 65°C
- -40°C to +85°C operating temperature ratings
- OVC III rated up to 3000m Altitude
- 2MOPP certified up to 4000m altitude
- EN55032 class "B" compliant @ floating load
- 3 years warranty



52.7 x 27.6 x 23.0mm (2.0 x 1.08 x 0.9 inch)
 60g (0.04 lbs)

APPLICATIONS

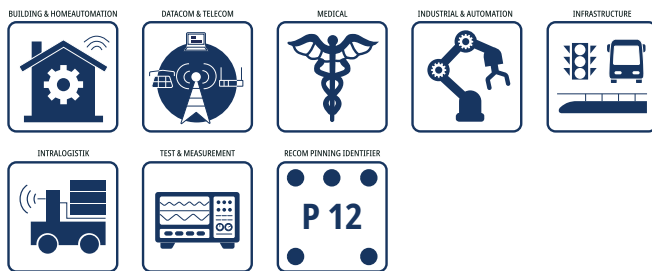

SAFETY & EMC



DESCRIPTION

The RACM16E series features a compact 1"x2" standard footprint with corresponding pinning [P12] or with stranded wires. It operates with CV/CC constant current limited overcurrent protection, suitable for driving nonlinear loads. Designed for cost-effectiveness, these encapsulated modules deliver a full 16W output power at temperatures up to 65°C and accommodates extended nominal input voltage ratings from 100-277Vac with OVCIII conditions. With a safety agency-rated temperature range up to +85°C it ensures reliable performance. Certified with 2MOPP for altitudes up to 4000m, it also meets touch current limits for BF usage in medical health care applications. Optimized for standby power usage the no load power consumption is less than 100mW. The power supplies hold international safety certifications conforming to industrial IEC62368 and IEC61558 standards, medical UL/IEC/EN60601 standards, and household EN60335 standards.

SELECTION GUIDE


Part Number	Input Voltage Range [VAC]	Output Voltage nom. [VDC]	Output Current max. [mA]	Efficiency ⁽¹⁾ typ. [%]	Output Power max. [W]
RACM16E-3.3SK/277	85-305	3.3	3640	78	12
RACM16E-05SK/277 ⁽²⁾	85-305	5	3200	82	16
RACM16E-12SK/277 ⁽²⁾	85-305	12	1330	84.5	16
RACM16E-15SK/277	85-305	15	1066	85	16
RACM16E-24SK/277 ⁽²⁾	85-305	24	667	86	16
RACM16E-30SK/277	85-305	30	533	86	16

Note1: Efficiency is tested at 230VAC and full load at +25°C ambient

RACM16E-K/277 Series / AC/DC Power Supply

16W / Universal Input 100V-277VAC

Model Numbering

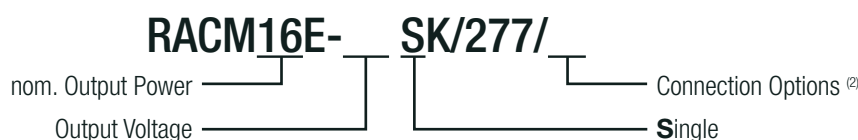

Note2: "/277" only= THT printmount, encapsulated, potted
add suffix "/W" for wired version, encapsulated, potted (except 3.3, 15 & 30Vout)

BASIC CHARACTERISTICS (measured @ T_{AMB}= 25°C, nom. V_{IN}, full load and after warm-up unless otherwise stated)



Parameter	Condition	Min.	Typ.	Max.
Nominal Input Voltage	50/60Hz	100VAC		277VAC
Operating Range ⁽³⁾	47-63Hz	85VAC		305VAC
	DC	120VDC		430VDC
Input Current	115/230/277VAC	200mA	250mA	450mA
Inrush Current	cold start at 25°C	115VAC		20A
		230VAC		30A
		277VAC		36A
No Load Power Consumption	30Vout		100mW	150mW
	others		75mW	100mW
Input Frequency Range	AC Input	47Hz		63Hz
Minimum Load		0%		
Power Factor	115VAC		0.6	
	230VAC		0.5	
	277VAC		0.45	
Start-up time				1500ms
Rise time				60ms
Hold-up time	230VAC	50ms		
Internal Operating Frequency				70kHz
Output Ripple and Noise ⁽⁴⁾	20MHz BW	nom. V _{OUT} = 24VDC, 30VDC		1% Vout
		others		150mVp-p

Note3: The products were submitted to all safety files at AC-operation, and to IEC/EN61010-1 for DC-operation

Note4: Measurements are made with a 0.1µF MLCC & 10µF E-cap in parallel across output (low ESR)



RACM16E-3.3SK/277 & RACM16E-05SK/277

RACM16E-3.3SK/277 = 12W max.

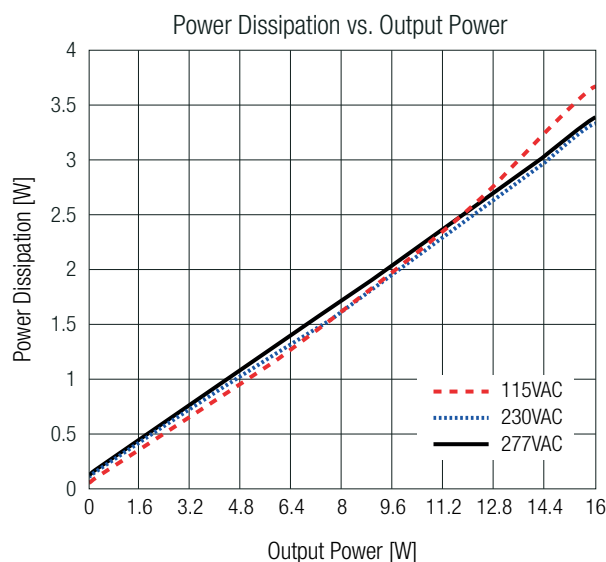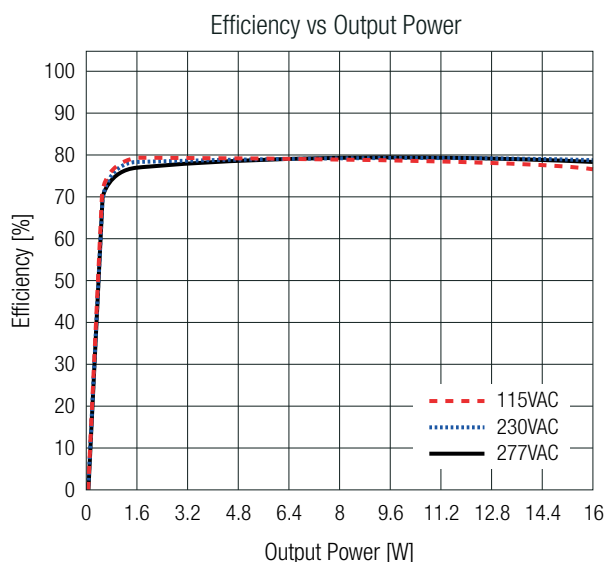

RACM16E-K/277 Series / AC-DC Power Supply**16W / Universal Input 100V-277VAC**
BASIC CHARACTERISTICS (measured @ $T_{AMB}=25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

others

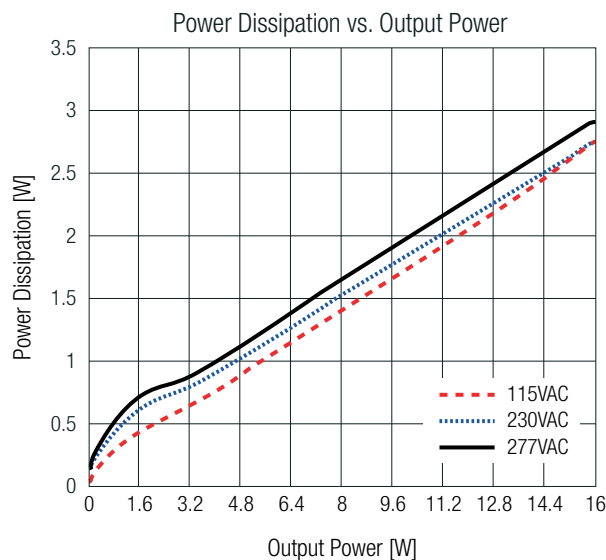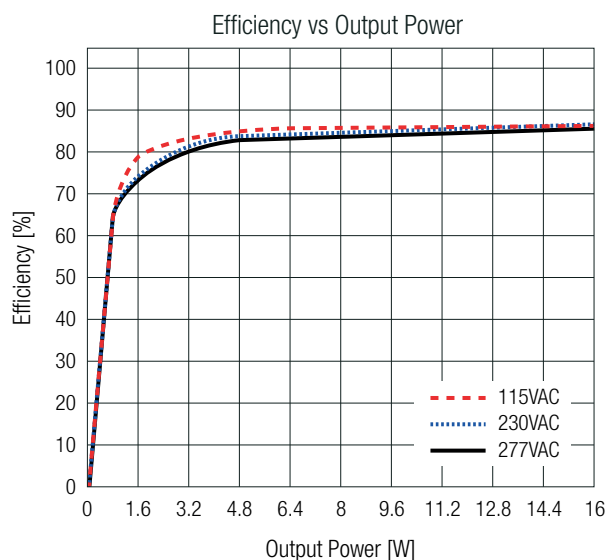
REGULATIONS (measured @ $T_{AMB}=25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

Parameter	Condition		Value
Output Accuracy			$\pm 2.0\%$ max.
Line Regulation	low line to high line, full load	RACM16E-3.3SK/277; RACM16E-05SK/277	$\pm 0.5\%$ max.
		others	$\pm 0.2\%$ max.
Load Regulation ⁽⁴⁾	10% to 100% load		1.0% max.
Transient Response	25% load step change		4.0% max.
	recovery time		500 μs typ.

Note4: Operation below 10% load will not harm the converter, but specifications may not be met

PROTECTIONS (measured @ $T_{AMB}=25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

Parameter	Type		Value
Input Fuse ⁽⁵⁾	internal		T2A, slow blow type
Short Circuit Protection (SCP)	below 100m Ω		hiccup mode; auto recovery
Over Load Protection	refer to „Output Voltage vs. Output Current“		constant current limitation until hiccup mode
Over Voltage Protection (OVP)			120% - 195%, hiccup mode
Over Voltage Category (OVC)	according to 62368-1, 60601-1 (2MOPP)		OVCII 5000m
	according to 62368-1, 60601-1 (2MOOP)		OVCIII 4000m
	according to 61558, 60335-1		OVCIII 3000m
Class of Equipment			Class II
Isolation Voltage ⁽⁶⁾	I/P to O/P; 1 minute	according to 61558	4.2kVAC
		according to 62368-1	6kVDC
Isolation Resistance	$V_{ISO}=500\text{VDC}$		1G Ω min.
Isolation Capacitance	I/P to O/P, 100kHz/0.1V		100pF max.
Insulation Grade			reinforced
Touch Current			0.1mA max.
Means of Protection	according to 60601-1		2MOPP (OVCII)
			2MOOP (OVCIII)
Medical Device Classification			designed to support type BF applied part

Note5: For system integration with DC operation, consider a suitable DC fuse in front of the input







Note6: For repeat Hi-Pot testing, reduce the time and/or the test voltage

RACM16E-K/277 Series / AC-DC Power Supply

16W / Universal Input 100V-277VAC

PROTECTIONS (measured @ $T_{AMB} = 25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

Output Voltage vs. Output Current

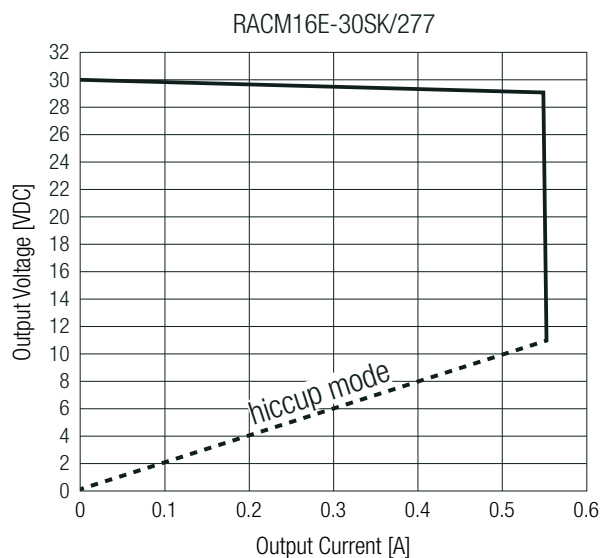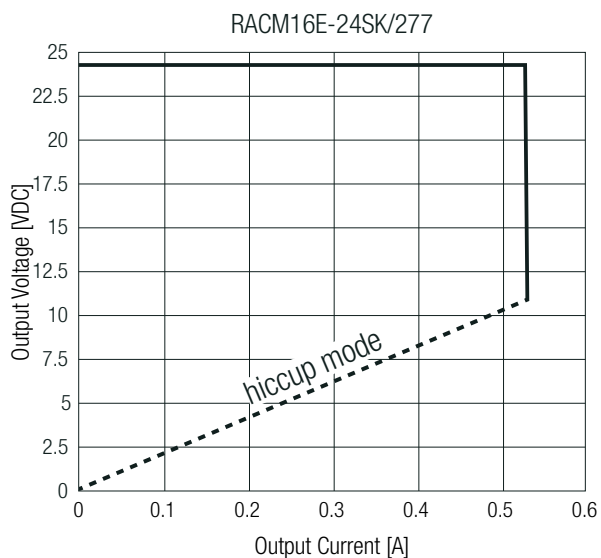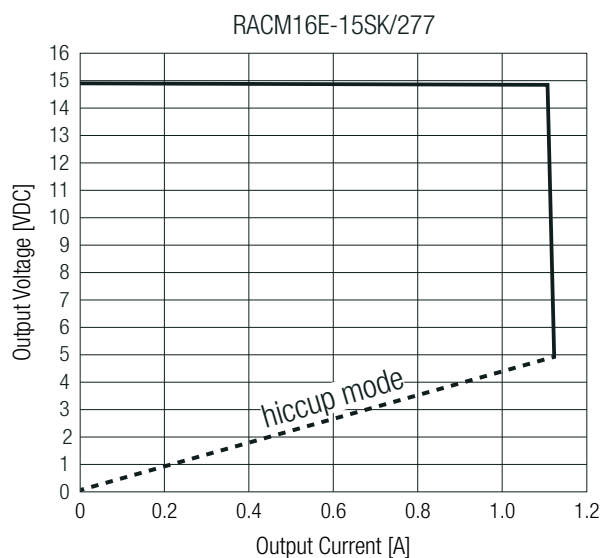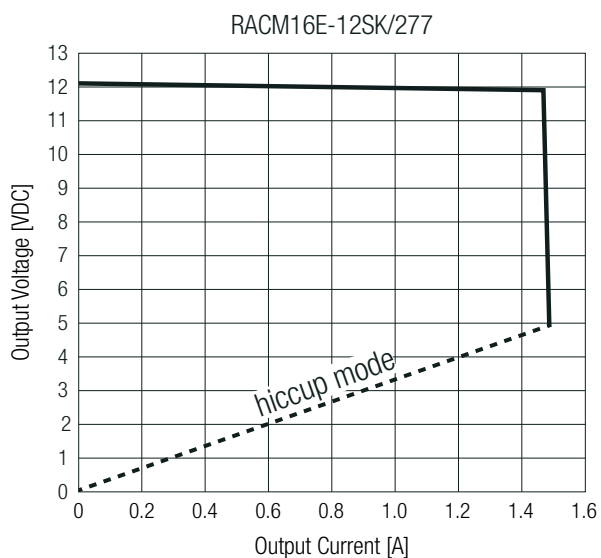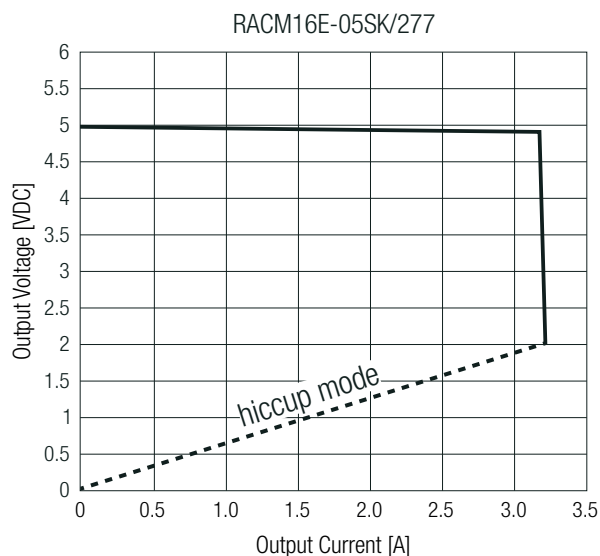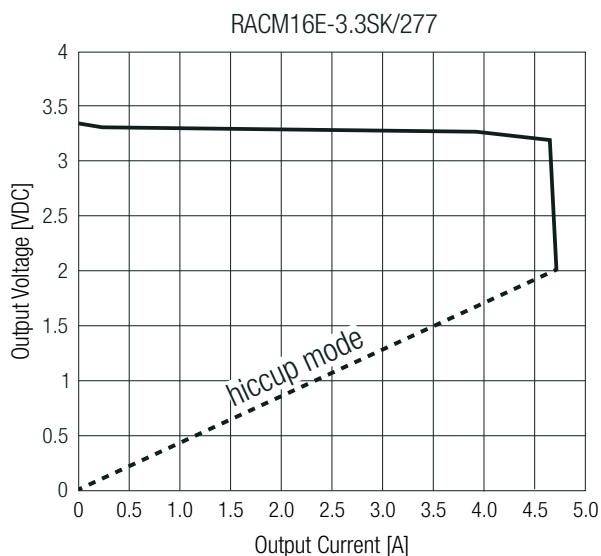

RACM16E-K/277 Series / AC-DC Power Supply

16W / Universal Input 100V-277VAC


ENVIRONMENTAL (measured @ $T_{AMB} = 25^{\circ}\text{C}$, nom. V_{IN} , full load and after warm-up unless otherwise stated)

Parameter	Condition		Value
Operating Ambient Temperature Range	@ natural convection (0.1m/s)	refer to „Derating Graph“	-40°C to +65°C
Maximum Case Temperature			+110°C
Temperature Coefficient			$\pm 0.02\%/K$
Operating Altitude ⁽⁷⁾	according to 62368-1, 60601-1		5000m (OVCII)
	according to 62368-1		4000m (OVCIII)
	according to 61558-2-16, 60335-1		3000m (OVCIII)
Operating Humidity	non-condensing		90% RH max.
Pollution Degree			PD2
Vibration	according to MIL-STD-202G		10-500Hz, 10min.: 1cycle, period / 60min. each along x,y,z axes
MTBF	according to MIL-HDBK-217, G.B.	$T_{AMB} = +25^{\circ}\text{C}$	1261×10^3 hours
		$T_{AMB} = +40^{\circ}\text{C}$	1091×10^3 hours
Design Lifetime	230VAC and full load	$T_{AMB} = +50^{\circ}\text{C}$	30×10^3 hours

Note7: Recognized by safety agency for safe operation up to 5000m. High altitude operation may impact the performance and lifetime.

Please contact RECOM tech support for advice

Derating Graph

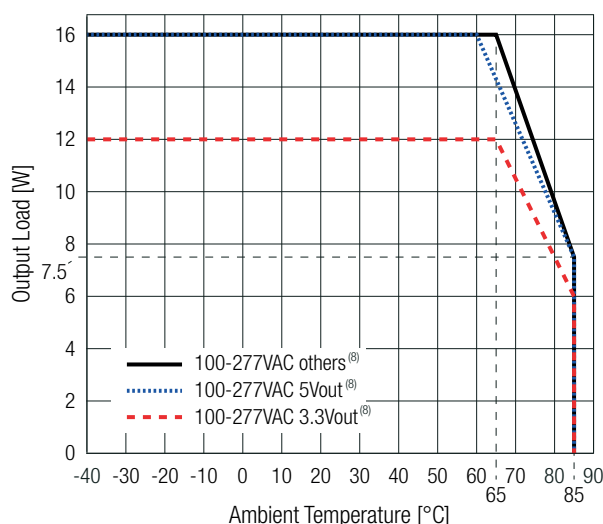 (@ Chamber and natural convection 0.1m/s) ⁽⁸⁾

 Note8: Nominal mains voltages are rated for tolerances of [nom. + $\pm 10\%$]

SAFETY & CERTIFICATIONS

Certificate Type (Safety)	Report Number	Standard
Audio/Video, information and communication technology equipment - Part1: Safety requirements 3rd Edition (CB)	085-230123101-000	IEC62368-1:2018 3rd Edition
Audio/Video, information and communication technology equipment - Part1: Safety requirements 3rd Edition		EN IEC 62368-1:2020+A11:2020
Audio/Video, information and communication technology equipment - Part1: Safety requirements 2nd Edition (LVD)	64.210.23.01232.01	EN62368-1:2014+A11:2017
Medical electrical equipment Part 1: General requirements for basic safety and essential performance	E511305-D6002-UL	ANSI/AAMI ES60601-1:2005 + A2:2021 Edition 3.2 CAN/CSA-C22.2 No. 60601-1:14 A2:2022 Edition 3.2
Medical electrical equipment Part 1: General requirements for basic safety and essential performance (CB)	23SBDS03024-01721	IEC60601-1:2005 + AMD2:2020 Edition 3.2
Medical electrical equipment Part 1: General requirements for basic safety and essential performance		EN60601-1:2006 + A2:2021
Household and similar electrical appliances – Safety – Part 1: General requirements	64.260.23.01234.01	IEC60335-1:2010 + C1:2016 5th Edition EN60335-1:2012 + A15:2021
Measurement methods for electromagnetic fields of household appliances and similar apparatus with regard to human exposure		EN62233:2008+AC:2008
Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V 3rd Edition (CB)	085-230123301-000	IEC61558-1:2017 3rd Edition

RACM16E-K/277 Series / AC-DC Power Supply

16W / Universal Input 100V-277VAC

SAFETY & CERTIFICATIONS

Certificate Type (Safety)	Report Number	Standard
Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V 3rd Edition (LVD)	64.250.23.01233.01	EN IEC 61558-1:2019
Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V Part 2: Particular requirements (CB)	085-230123301-000	IEC61558-2-16:2009 + A1:2013 1st Edition
Safety of power transformers, power supplies, reactors and similar products for supply voltages up to 1100 V Part 2: Particular requirements (LVD)	64.250.23.01233.01	EN61558-2-16:2009 + A1:2013
RoHS2		RoHS 2011/65/EU + AM2015/863


EMC Compliance (EN60601-1-2)	Condition	Standard / Criterion
Medical electrical equipment Part 1-2: General requirements for basic safety and essential performance		EN60601-1-2:2015+A1:2021
ESD Electrostatic discharge immunity test	Air: $\pm 2, 4, 8, 15\text{kV}$ Contact: $\pm 8\text{kV}$	IEC61000-4-2:2008 EN61000-4-2:2009
Radiated, radio-frequency, electromagnetic field immunity test	10 V/m (80-2700MHz), 27V/m (385MHz), 28V/m (450MHz), 9V/m (710, 745, 780MHz), 28V/m (810, 870, 930MHz), 28V/m (1720, 1845, 1970MHz), 28V/m (2450MHz), 9V/m (5240, 5500, 5785MHz)	IEC/EN61000-4-3:2006+A2:2010
Fast Transient and Burst Immunity	AC Port: L, N, L-N: 2kV	IEC/EN61000-4-4:2012
Surge Immunity	AC Port: L-N: $\pm 0.5, 1, 2\text{kV}$	IEC/EN61000-4-5:2014 + A1:2017
Immunity to conducted disturbances, induced by radio-frequency fields	3, 6Vrms (0.15-80MHz)	IEC61000-4-6:2013 EN61000-4-6:2014
Power Magnetic Field Immunity	30A/m	IEC61000-4-8:2009 EN61000-4-8:2010
Voltage Dips	100% (0.5P, 1.0P); 30%	IEC/EN61000-4-11:2004+A1:2017
Voltage Interruptions	100%	
Limits of Voltage Fluctuations & Flicker		EN61000-3-3:2013

EMC Compliance (EN61204-3)	Condition	Standard / Criterion
Low voltage power supplies, d.c. output Part 3: Electromagnetic compatibility (EMC)		EN IEC 61204-3:2018, Class B
ESD Electrostatic discharge immunity test	Air: $\pm 2, 4, 8\text{kV}$ Contact: $\pm 4\text{kV}$	IEC61000-4-2:2008, Criteria A EN61000-4-2:2009, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	10V/m (80-1000MHz), 3V/m (1400-2000MHz), 1V/m (2000-2700MHz)	IEC/EN61000-4-3:2006 + A2:2010, Criteria A
Fast Transient and Burst Immunity	AC Port: L, N, L-N: 2kV	IEC/EN61000-4-4:2012, Criteria A
Surge Immunity	AC Port: L-N: $\pm 1\text{kV}$	IEC/EN61000-4-5:2014 + A1:2017, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	10Vrms (0.15-80MHz)	IEC61000-4-6: 2013, Criteria A EN61000-4-6:2014, Criteria A
Power Magnetic Field Immunity	30A/m	IEC61000-4-8:2009, Criteria A EN61000-4-8:2010, Criteria A
Voltage Dips	100% (0.5P; 1.0P), 20%, 30%	IEC/EN61000-4-11:2004 + A1:2017, Criteria A
	60%	IEC/EN61000-4-11:2004 + A1:2017, Criteria B
Voltage Interruptions	100%	IEC/EN61000-4-11:2004 + A1:2017, Criteria B
Limits of Voltage Fluctuations & Flicker		EN61000-3-3:2013 + A1:2019

EMC Compliance (EN55032)	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission Requirements	O/P connected to GND:	EN55032:2015+A11:2020, Class B
Limitations on the amount of electromagnetic interference allowed from digital and electronic devices	refer to: "PELV installation" and floating output; without external filter	FCC 47 CFR Part 15 Subpart B, Class B

RACM16E-K/277 Series / AC-DC Power Supply**16W / Universal Input 100V-277VAC****SAFETY & CERTIFICATIONS**




Suggested external filter for PELV installation (refer to: „EMC Compliance (EN55032)“)

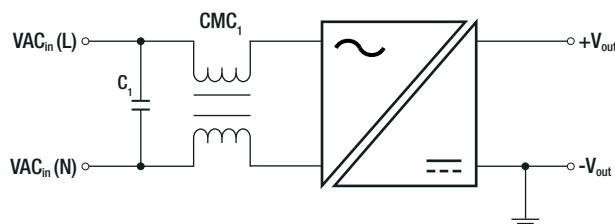**Component List**



C ₁	CMC ₁
0.22μF	45mH: RACMC45-500/UF9.8 (coming soon)

DIMENSION & PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Materials	case/baseplate	plastic, (UL94-V0)
	potting	PU, (UL94-V0)
	PCB	FR4, (UL94-V0)
Dimension (LxWxH)	THT printmount	52.7 x 27.6 x 23.0mm 2.0 x 1.08 x 0.9 inch
	"/W"	52.7 x 27.6 x 23.0mm 2.0 x 1.08 x 0.9 inch
Weight	THT printmount	60g typ. 0.13 lbs
	"/W"	65g typ. 0.14 lbs

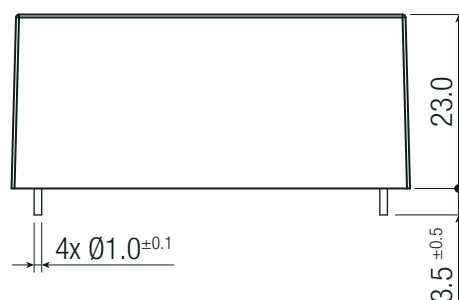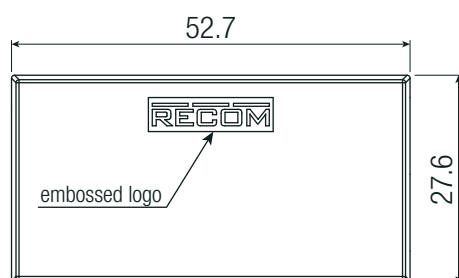Dimension Drawing THT printmount version (mm)**Pinning information [P12]**

Pin #	Single
1	VAC in (N)
2	VAC in (L)
3	-Vout
4	+Vout

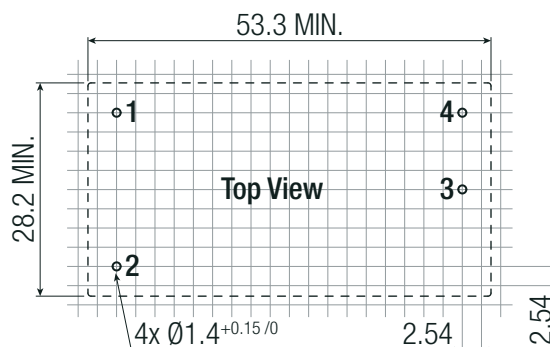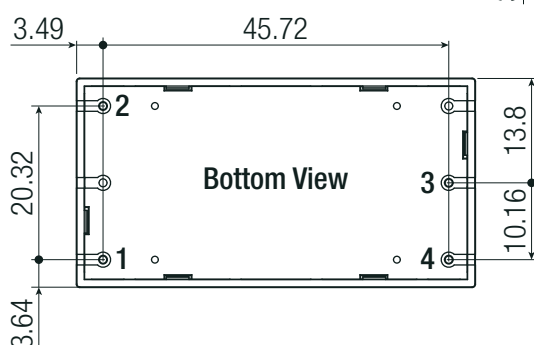
Recommended Footprint Detail
 Tolerance: xx.x= ±0.5mm
 xx.xx= ±0.25mm

RACM16E-K/277 Series / AC-DC Power Supply

16W / Universal Input 100V-277VAC


DIMENSION & PHYSICAL CHARACTERISTICS

Dimension Drawing “/277/W” version (mm)

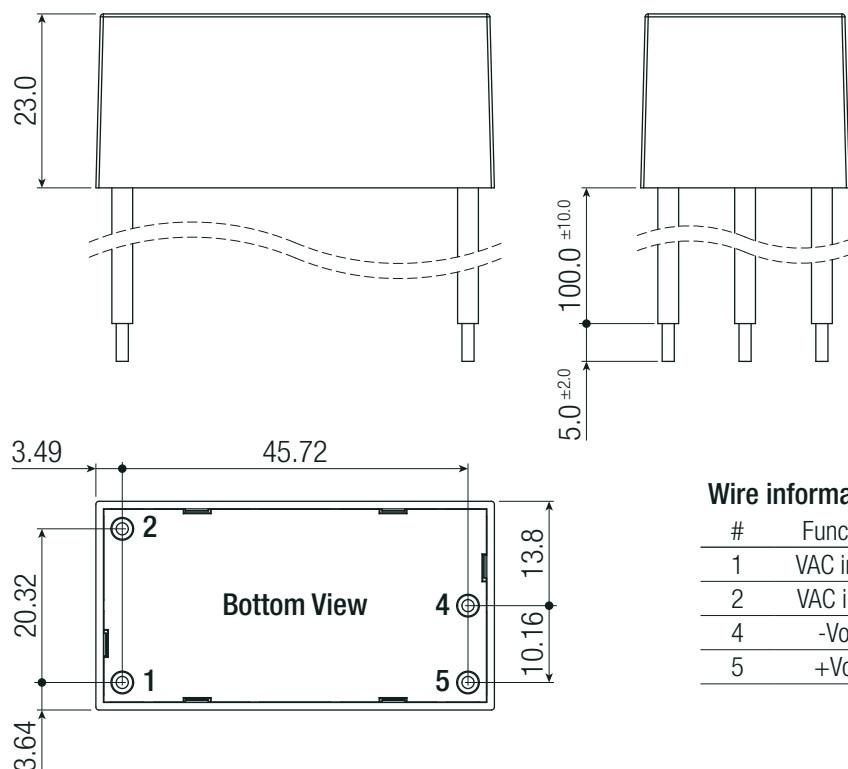

Tolerance: xx.x= ±0.5mm
xx.xx= ±0.25mm

BLOCK DIAGRAM

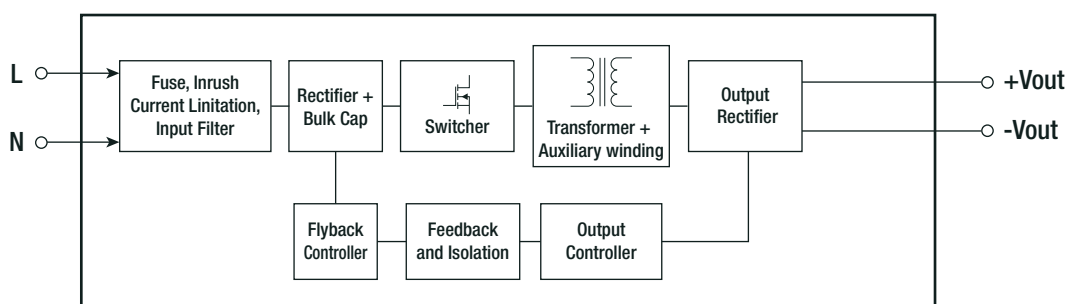

PACKAGING INFORMATION

Parameter	Type		Value
Packaging Dimension (LxWxH)	THT printmount	tube	490.0 x 56.0 x 40.0mm
	“/W”	tray	446.0 x 186.0 x 41.0mm
Packaging Quantity	THT printmount		15pcs
	“/W”		20pcs
Storage Temperature Range			-40°C to +90°C
Storage Humidity			95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.