



LFM420S SERIES 420 WATT AC-DC POWER SUPPLY WITH PFC

Features

- Universal Input Range 85~264Vac
- High Efficiency up to 94.5%
- Class I
- 25.4mm Low Profile Package
- No Load Input Power Consumption <0.5W
- No Load Input Power Consumption <0.6W for 54V
- Approval IEC/EN/UL 62368-1 Ed 3.0
- Approval EN55032 and CISPR/FCC Class B
- Meets IEC/EN 60335-1
- Operating Altitude 5000m
- Continuous Short Circuit Protection
- Over Voltage Protection
- Over Temperature Protection
- High Power Density 25.0 W/Inches³
- Active PFC Function
- Over Voltage Category OVC II & OVC III
- Constant Current



MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT			RIPPLE & NOISE NOTE1	VOLTAGE ACCURACY NOTE2	VOLTAGE ADJ. RANGE	LINE REGULATION NOTE3	LOAD REGULATION NOTE4	%EFF. (Typ.) NOTE5
		With Fan NOTE6	Without Conduction Cooling	With Conduction Cooling NOTE7						
LFM420S120C	12 V	35.00 A	23.33 A	29.17 A	120 mV	±1%	11.4-12.6 V	±0.5%	±1%	92.5%
LFM420S150C	15 V	28.00 A	18.67 A	23.33 A	150 mV	±1%	14.25-15.75 V	±0.5%	±1%	93.0%
LFM420S240C	24 V	17.50 A	11.67 A	14.58 A	240 mV	±1%	22.8-25.2 V	±0.5%	±1%	94.0%
LFM420S280C	28 V	15.00 A	10.00 A	12.50 A	280 mV	±1%	28-29.4 V	±0.5%	±1%	94.0%
LFM420S300C	30 V	14.00 A	9.33 A	11.67 A	300 mV	±1%	28.5-31.5 V	±0.5%	±1%	94.0%
LFM420S360C	36 V	11.67 A	7.78 A	9.72 A	360 mV	±1%	34.2-37.8 V	±0.5%	±1%	94.0%
LFM420S480C	48 V	8.75 A	5.83 A	7.29 A	480 mV	±1%	45.6-50.4 V	±0.5%	±1%	94.0%
LFM420S540C	54 V	7.78 A	5.19 A	6.48 A	540 mV	±1%	51.3-55.0 V	±0.5%	±1%	94.5%

Note:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
2. Voltage accuracy is set at full load and 25°C Ta.
3. Line regulation is measured from high line to low line with rated load.
4. Load regulation is measured from full load to 10% rated load.
5. Typical efficiency at 230 Vac and full load at 25°C.
6. Forced air convection with 21.9CFM above 100V_{ac}.
7. Conduction convection with external baseplate, 24.8*48.0cm with min.0.12cm thick.



LFM420S Series

PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type	Mounting Inserts
LFM420	O	XXX	X	-YZ
LFM420	S : Single	120 : 12V 150 : 15V 240 : 24V 280 : 28V 300 : 30V 360 : 36V 480 : 48V 540 : 54V	C : With Cover	Blank: Through Hole C0: Threaded Hole

Part Number Example:

LFM420S120C: With Cover, 420W, 12Vdc Output



LFM420S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	85		264	V _{ac}
	No Safety approvals		120		370	V _{dc}
Operating Temperature	See Derating Curve	All	-40		80	°C
Operating Case Temperature	At the center of base plate (T _c = Case temperature)	All	-40		85	°C
Storage Temperature		All	-40		85	°C
Operating Altitude	IEC/EN/UL 62368 OVC II	All			5000	m
	IEC/EN/UL 62368 OVC III				2000	m

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	V _{ac}
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Load, V _{in} =100V _{ac}	All			6	A
Leakage Current		All			0.3	mA
Inrush Current	V _{in} =240V _{ac} , Cold start at 25°C	All		30		A
Under Voltage Protection		All	65		75	V _{ac}
Power Factor	230V _{ac} @ Full load	All		0.95		

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V _{in} =Nominal V _{in} , I _o =I _o max., T _c =25°C	LFM420S120	11.88	12	12.12	V _{dc}
		LFM420S150	14.85	15	15.15	
		LFM420S240	23.76	24	24.24	
		LFM420S280	27.72	28	28.28	
		LFM420S300	29.70	30	30.30	
		LFM420S360	35.64	36	36.36	
		LFM420S480	47.52	48	48.48	
		LFM420S540	53.46	54	54.54	
Operating Output Current Range	See Derating Curve	LFM420S120			35.00A	A
		LFM420S150			28.00A	
		LFM420S240			17.50A	
		LFM420S280			15.00A	
		LFM420S300			14.00A	
		LFM420S360			11.67A	
		LFM420S480			8.75A	
		LFM420S540			7.78A	
Holdup Time	V _{in} =115Vac load:350W Ambient temperature=25°C	All	12		ms	
	V _{in} =115Vac Load:420W Ambient temperature=25°C		8			
Output Voltage Regulation						
Load Regulation	10% Load to full load	All	±1.0			%
Line Regulation	V _{in} =High line to low line	All	±0.5			%
Output Voltage Adjustment	P _o ≤ max. rated power, I _o ≤ I _o max.	LFM420S280	0		+5	%
	P _o ≤ max. rated power, I _o ≤ I _o max.	LFM420S540	-5		+2	%
	P _o ≤ max. rated power, I _o ≤ I _o max.	Others	-5		+5	%



LFM420S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Over Voltage Protection	Latch off (reset after about one minute after the input is turned off)	LFM420S120 LFM420S150 LFM420S240 LFM420S280 LFM420S300 LFM420S360 LFM420S480 LFM420S540		16 20 30 35 35 50 63 63		V _{dc}
Over Current Protection	Constant current, auto recovery (see application note)	All	110		170	%
Short Circuit Protection	Auto recovery	All				
Over Temperature Protection	Auto recovery If conduction convection with external baseplate is used or the recommended temperature curve is exceeded, the T _c temperature must be maintained <85°C	All				
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz Band Width 3. Ambient Temperature=25°C	LFM420S120 LFM420S150 LFM420S240 LFM420S280 LFM420S300 LFM420S360 LFM420S480 LFM420S540			120 150 240 280 300 360 480 540	mV
Load Capacitance	1. V _{in} =115V _{ac} and 230V _{ac} 2. Output is max. load 3. Ambient temperature=25°C	LFM420S120 LFM420S150 LFM420S240 LFM420S280 LFM420S300 LFM420S360 LFM420S480 LFM420S540			29100 23300 14500 12500 11600 9700 7200 6400	uF
Efficiency	1. Input Voltage is 230V _{ac} 2. Output is rated load 3. Ambient temperature=25°C	LFM420S120 LFM420S150 LFM420S240 LFM420S280 LFM420S300 LFM420S360 LFM420S480 LFM420S540		92.5% 93.0% 94.0% 94.0% 94.0% 94.0% 94.0% 94.5%		%

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 Minute (without dielectric breakdown)	All			4250	V _{ac}
Input to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V _{ac}
Output to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V _{ac}
Isolation Resistance	Input to Output	All	100			MΩ

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	P _{out} =max. rated power	All		65		kHz





LFM420S Series

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$; $T_a=25^{\circ}\text{C}$ per MIL-HDBK-217F	All		400		K hours
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5, Table 516.5-1 10ms, each axis 3 times($\pm X$ 、 $\pm Y$ 、 $\pm Z$ axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hour (each axis),. Total 3 hrs.	All		4		g
Weight		All		470		g
Dimensions		All	5.09x3.29x1.00 Inches (129.4x83.5x25.4mm)			
Safety	Class I, IEC/EN/UL 62368-1					Ed. 3.0
EMC Emission	EN 55032:2015+A11:2020 (Class B), EN 61000-6-3:2021, EN 61000-6-4:2019, EN 61204-3:2018, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A2:2021, 47 CFR FCC Part 15 Subpart B					Class B
Conducted Disturbance	EN 55032, 47 CFR FCC Part 15 Subpart B (Class B)					Class B
Radiated Disturbance	EN 55032, 47 CFR FCC Part 15 Subpart B (Class B)					Class B
Harmonic Current Emissions	EN 61000-3-2:2019+A1:2021					Class A, C, D
Voltage Fluctuations & Flicker	EN 61000-3-3:2013+A2:2021					
EMC Immunity	EN 55035:2017+A11:2020, EN 61000-6-1:2019+CRGD:2019, EN 61000-6-2:2019, EN 61204-3:2018					
Electrostatic Discharge (ESD)	IEC 61000-4-2:2008, Air Discharge: $\pm 8\text{kV}$, Contact Discharge: $\pm 4\text{kV}$					Criterion A
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3:2020					Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4:2012, $\pm 2\text{kV}$					Criterion A
Surge	IEC 61000-4-5:2014+A1:2017, Line-Line: $\pm 2\text{kV}$, Line-Earth (Ground): $\pm 4\text{kV}$					Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6:2013+COR1:2015					Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8:2009					Criterion A
Voltage Dips	IEC 61000-4-11:2020, Dip: 30% Reduction, Dip >95% Reduction					Criterion A
Voltage Interruptions	IEC 61000-4-11:2020, >95% Reduction					Criterion B
Application Note Link			LFM420S Series App Notes			

CHARACTERISTIC CURVE

Power Derating Curve

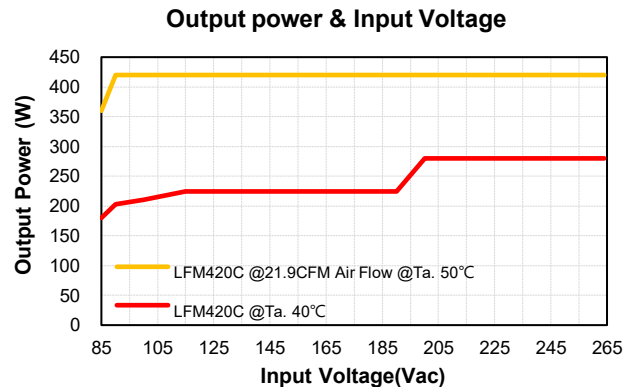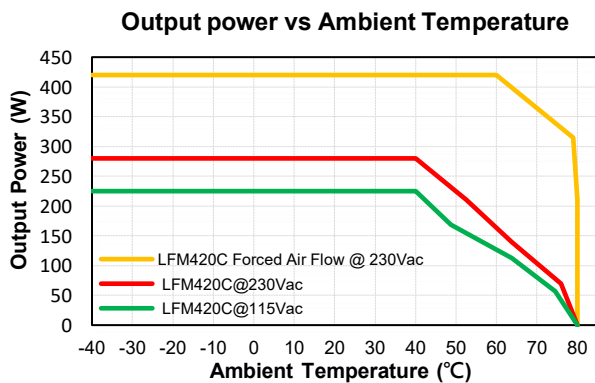





LFM420S Series

Conduction Convection with External Baseplate (24.8cmx48cmx0.12cm)


Output power vs Ambient Temperature

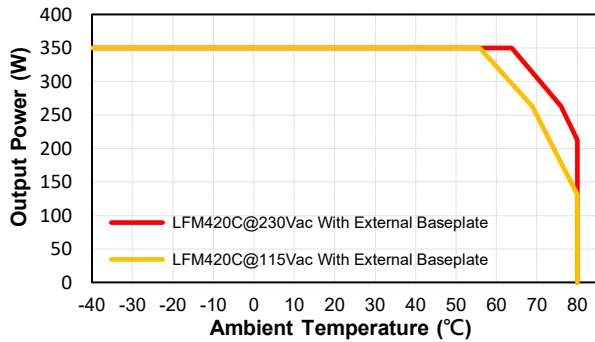

Natural Convection With External Baseplate
Output power & Input Voltage

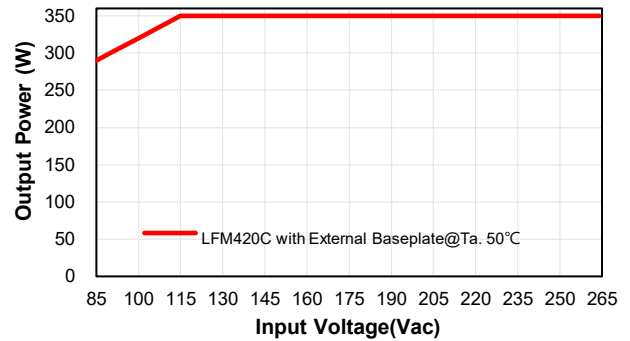


Output power vs Case Temperature

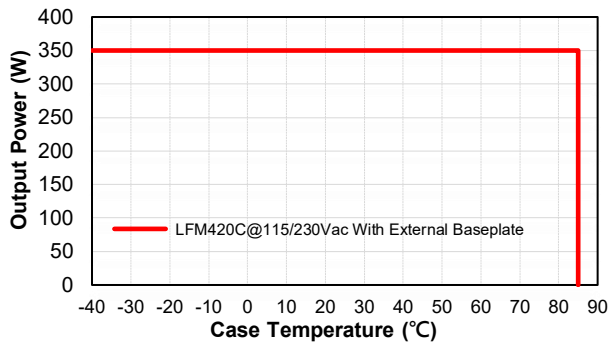


Performance Data


LFM420S120 (Eff Vs Io)

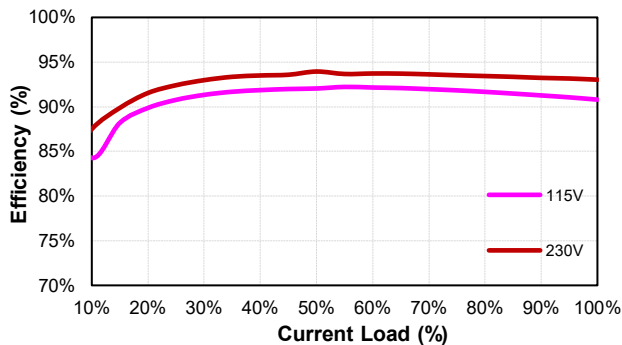


LFM420S150 (Eff Vs Io)

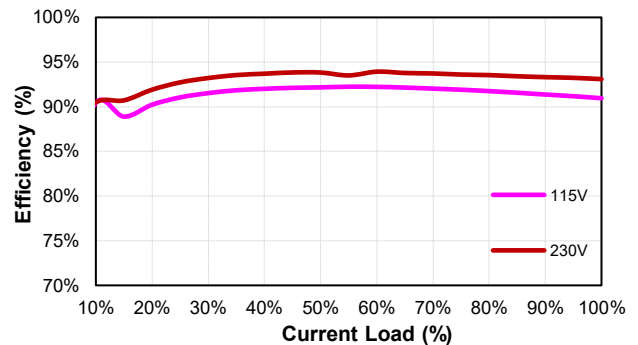

LFM420S240 (Eff Vs Io)

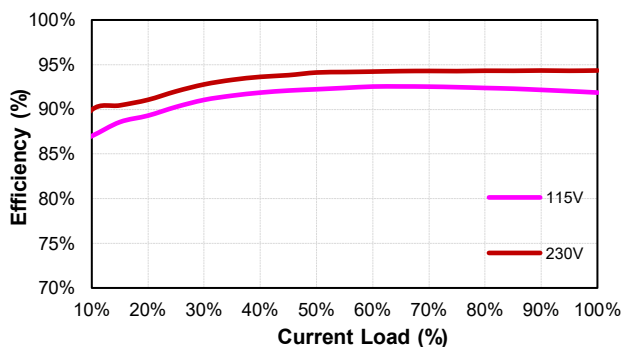


LFM420S280 (Eff Vs Io)

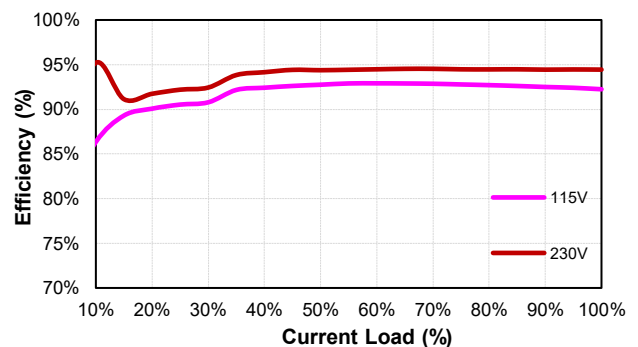




LFM420S Series


LFM420S300 (Eff Vs Io)

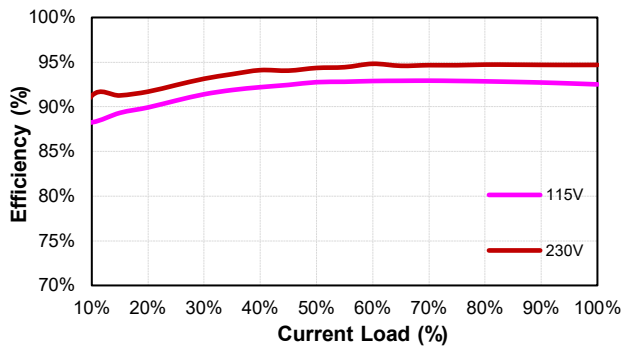


LFM420S360 (Eff Vs Io)

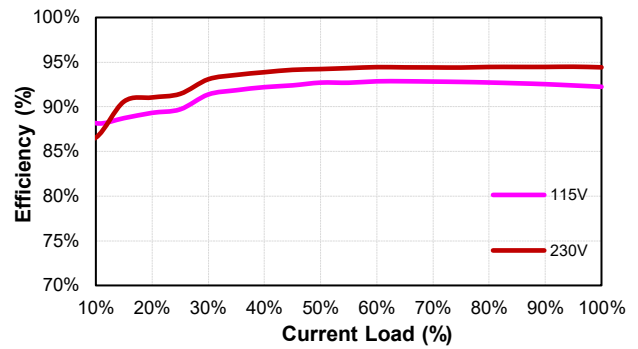

LFM420S480 (Eff Vs Io)

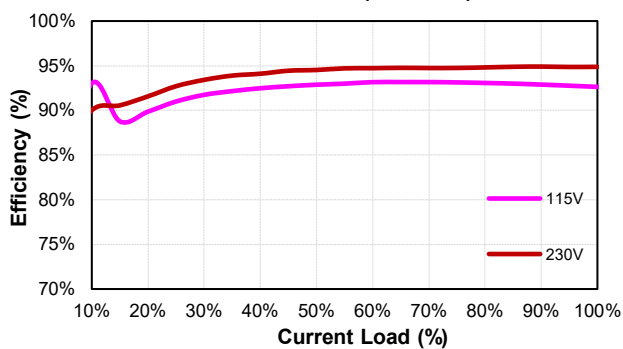


LFM420S540 (Eff Vs Io)

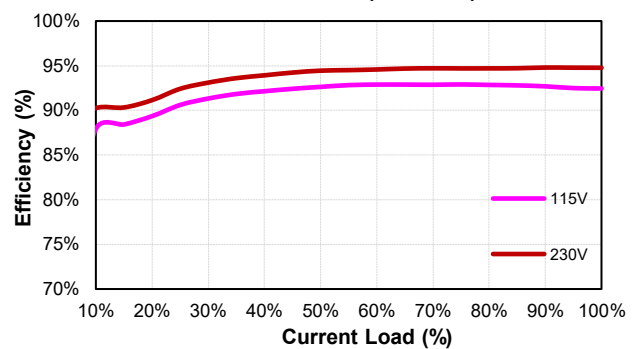



LFM420S Series

MECHANICAL SPECIFICATION

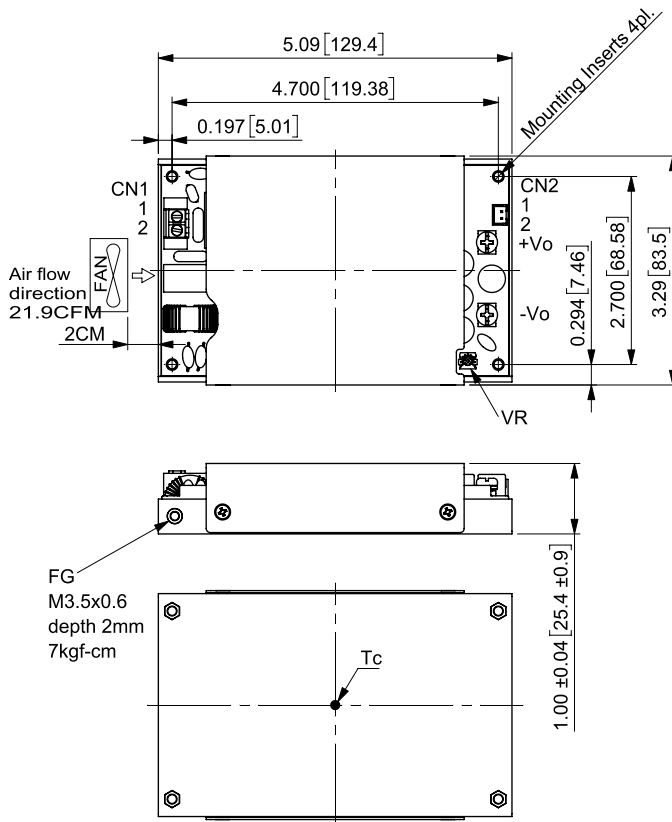

LFM420SXXXC LFM420SXXXC-C0

All Dimensions in Inches[mm]
Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):ECE ETB22

Pin	Function	Mating Wire Range
1	ACL	14~18 AWG
2	ACN	

DC Output Connector(CN2):TKP 8822-02-NHB or equivalent

Pin	Function	Mating Housing	Terminal
1	Rs+	JST XHP-2 or equivalent	JST
2	Rs-		SXH-001T-P0.6N or equivalent

DC Output Connector:KANG YANG PCB-58M4

Function	The screw locked torque
+Vo	M4 7kgf-cm
-Vo	

Mounting Inserts

Series	Option
Blank	Ø3.2 Through depth 10.5mm
-C0	M3x0.5 Threaded depth 10.5mm