



Kupplungssteckverbinder TWILOCK-S*

Kabel-Ø

Artikelnummer



2 + 3 + PE, Einsatz für Stifte

13 – 18 mm	7.720.623.000
17 – 24 mm	7.720.723.000
21 – 28 mm	7.720.823.000

* Steckbar mit Speedtec



13 – 18 mm	7.720.623.00S
17 – 24 mm	7.720.723.00S
21 – 28 mm	7.720.823.00S



Kupplungssteckverbinder TWILOCK-S*

Kabel-Ø

Artikelnummer



4 + 3 + PE, Einsatz für Stifte

13 – 18 mm	7.720.643.000
17 – 24 mm	7.720.743.000
21 – 28 mm	7.720.843.000

* Steckbar mit Speedtec



13 – 18 mm	7.720.643.00S
17 – 24 mm	7.720.743.00S
21 – 28 mm	7.720.843.00S



Gerätesteckverbinder Vorderwandmontage TWILOCK-S*

Typ

Artikelnummer

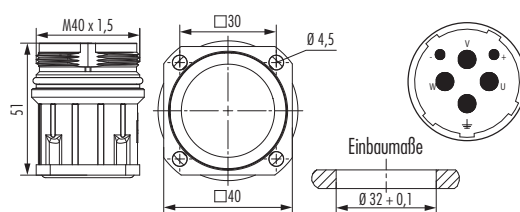

2 + 3 + PE, Einsatz für Stifte

4 x Bohr. 4,5 mm	7.740.023.000
------------------------	---------------

* Steckbar mit Speedtec



4 x Bohr. 4,5 mm	7.740.023.00S
------------------------	---------------



Gerätesteckverbinder Vorderwandmontage TWILOCK-S*

Typ

Artikelnummer

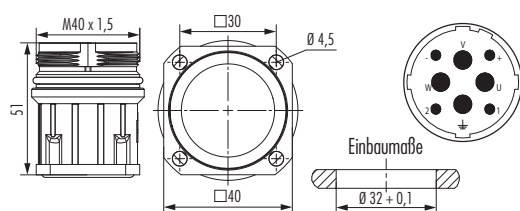

4 + 3 + PE, Einsatz für Stifte

4 x Bohr. 4,5 mm	7.740.043.000
------------------------	---------------

Steckbar mit Speedtec

4 x Bohr. 4,5 mm	7.740.043.00S
------------------------	---------------

