


Table 1. Dimension

PART NO.	n	A ± 0.3	B ± 0.3	(C)	D ± 0.3	(E)	F	M	For use with connector
MFC-16LH	16	see 16 contacts			25	8	1	2	MFC-16HF
MFC-20LH	20	26.0	26.0	23.0	25	9	1	2	MFC-20HF
MFC-26LH	26	33.5	33.5	29.5	30	10	1	2	MFC-26HF
MFC-30LH	30	38.7	38.0	34.0	35	12	2	2.5	MFC-30HF
MFC-34LH	34	43.7	39.7	35.7	35	13	1	2.5	MFC-34HF
MFC-40LH	40	51.3	47.3	43.3	35	16	1	2.5	MFC-40HF
MFC-50LH	50	64.0	60.0	56.0	35	21	1	2.5	MFC-50HF

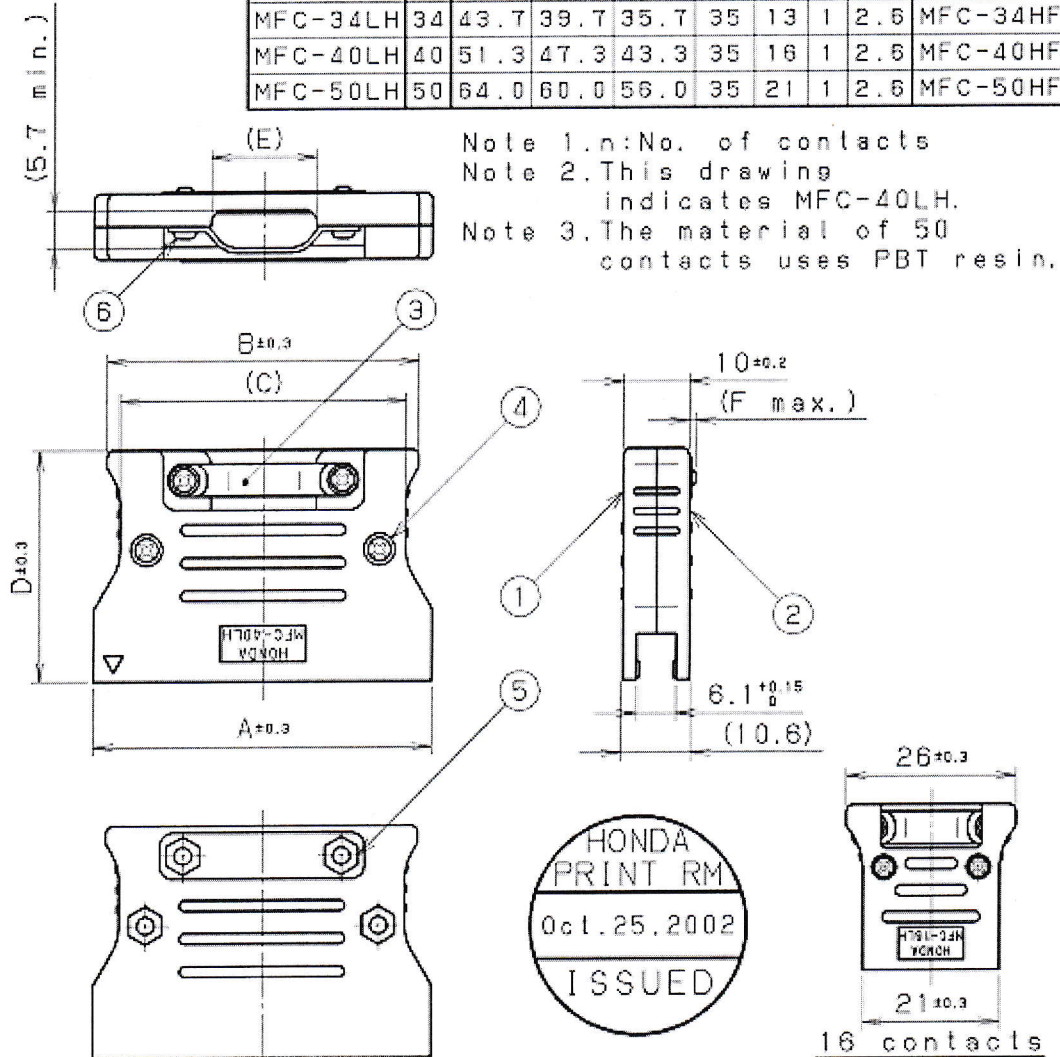

Back view

				6	Cross recessed head screws with captive washer	Steel	2	Nickel	M ₄ x 7 see table 1
				5	Hexagon nuts	Steel	4	Nickel	M ₄ see table 1
				4	Cross recessed head screws	Steel	2	Nickel	M ₄ x 8 see table 1
△				3	Cable Clamp	Stainless steel	1		
△				2	Cover B	ABS resin see note 3	1		UL94V-0 Black
△				1	Cover A	ABS resin see note 3	1		UL94V-0 Black

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	DATE Oct. 24, 2002		SCALE 1/1	UNIT mm (INCH)	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.				
APP. DATE & REV.						NAME	MFC-(n) HF TYPE COVER			
DR.	DE.	CHK.	CHK.	APP.		PART NO.	MFC-(n) LH			
K. ODAKU	K. ODAKU	K. ONO	—	H. EBIHARA						