



Verschluss V-N-Ms-SD (metrisch, PG)

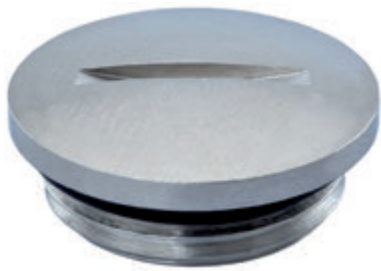

Material	Messing vernickelt
Material O-Ring	NBR
Schutzart	IP 68 – 10 bar / IP 69 K
Temperaturbereich	-40°C bis +80°C

RoHS

// andere O-Ring-Materialien auf Anfrage

AG	D mm	GL mm	H mm	Art.-Nr.
M12 x 1,5	14	6,5	9,5	1.052.1201.50
M16 x 1,5	20	6	9	1.052.1601.50
M20 x 1,5	24	6,5	9,5	1.052.2001.50
M25 x 1,5	28	7	11	1.052.2501.50
M32 x 1,5	35	8	12,5	1.052.3201.50
M40 x 1,5	45	8	12	1.052.4001.50
M50 x 1,5	55	9	15	1.052.5001.50
M63 x 1,5	68	10	16	1.052.6301.50
PG 7	14	4,8	8	1.052.0701.01
PG 9	17	5,5	9	1.052.0901.01
PG 11	20	5,5	9	1.052.1101.01
PG 13,5	22	6	9,5	1.052.1301.01
PG 16	24	6	9,5	1.052.1601.01
PG 21	30	6,5	11	1.052.2101.01
PG 29	39	7,5	12	1.052.2901.01
PG 36	50	9	15	1.052.3601.01
PG 42	57	10	16	1.052.4201.01
PG 48	64	10	16	1.052.4801.01