

CCU15A231WN0UX

outdoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	1415/1555	W
	4828/5306	BTU/h
Cooling Capacity L35L50	1135/1185	W
	3873/4043	BTU/h
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	5.2/5.8	A
Rated Power L35L35	655/755	W
Rated Power L35L50	755/915	W
Frequency	50/60	Hz
Max Current	24	A
Fuse T	8	A
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	370	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU15A231WN0UX

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

Technical data		
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Internal Circuit	IP55	
Operating Temperature	-20÷55	°C
	-4÷131	°F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU15A231WN0UX

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

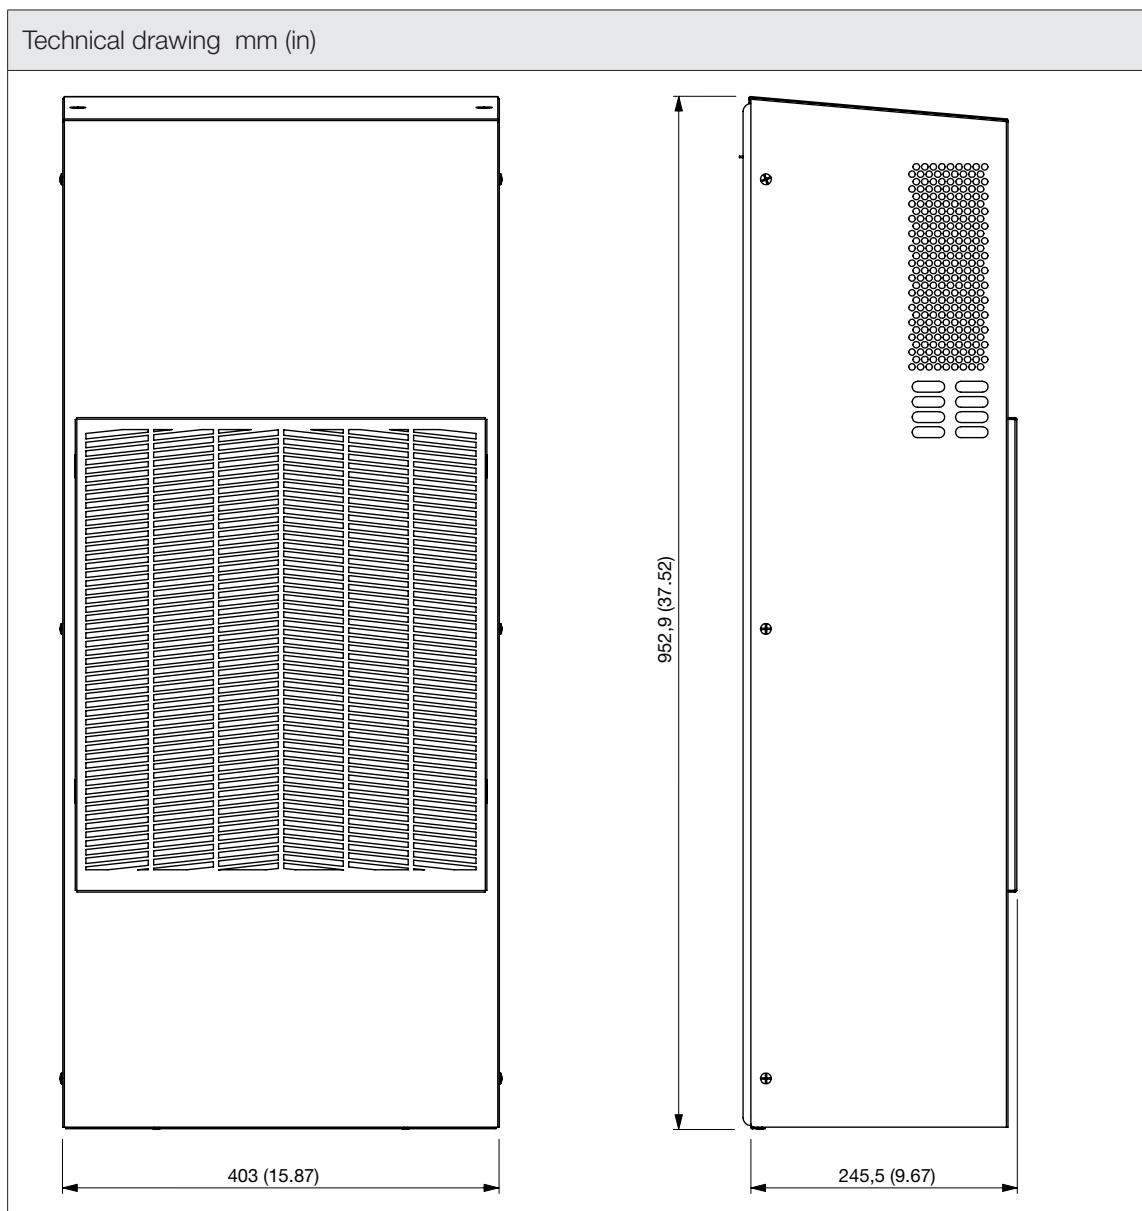



Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU15A231WN0UX

outdoor

> CONTATTACI

Cooling Capacity vs Temperature

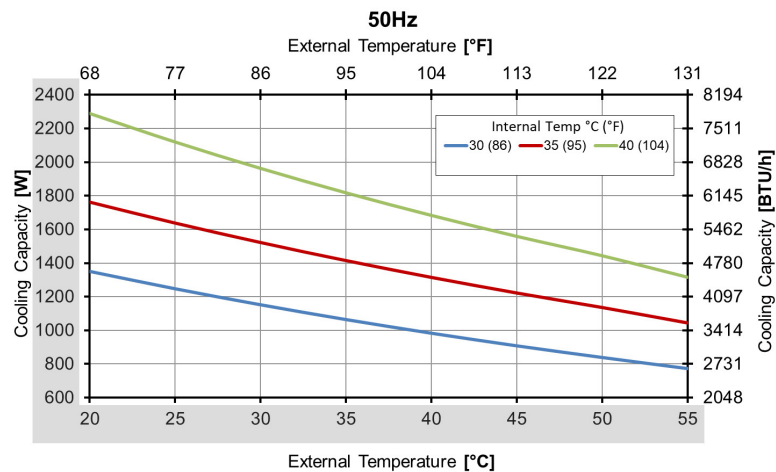

Cooling Capacity vs Temperature

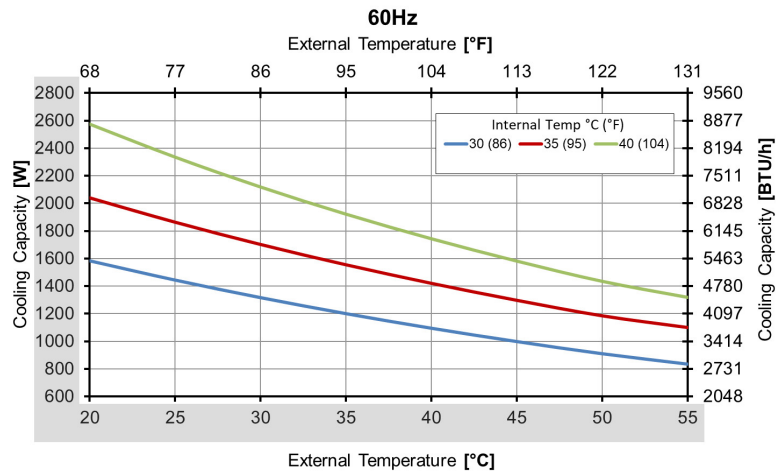


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

 www.simpex.ch

Besuchen Sie unseren Simpex E-Shop
mit über 12'000 Produkten.

Er bietet Ihnen eine breite Funktionsvielfalt, sowie intelligente
Suchfunktionen. Ob Sie den Shop als Einkaufsplattform oder als
Produktfinder nutzen – im Simpex E-Shop haben Sie alle Infor-
mationen schnell und tagesaktuell zur Hand.

24h und das 365 Tage im Jahr.



Hauptsitz

Simpex Electronic AG

Binzackerstrasse 33

CH-8620 Wetzikon

Telefon +41 44 931 10 10

E-Mail contact@simpex.ch

Internet www.simpex.ch

Manufaktur

Simpex Electronic SA

En Bas-le-Port 1

CH-2088 Cressier

E-Mail contact@simpex.ch

Internet www.simpex.ch

 www.simpex.ch

Besuchen Sie unseren Simpex E-Shop
mit über 12'000 Produkten.

Er bietet Ihnen eine breite Funktionsvielfalt, sowie intelligente
Suchfunktionen. Ob Sie den Shop als Einkaufsplattform oder als
Produktfinder nutzen – im Simpex E-Shop haben Sie alle Infor-
mationen schnell und tagesaktuell zur Hand.

24h und das 365 Tage im Jahr.



Hauptsitz

Simpex Electronic AG

Binzackerstrasse 33

CH-8620 Wetzikon

Telefon +41 44 931 10 10

E-Mail contact@simpex.ch

Internet www.simpex.ch

Manufaktur

Simpex Electronic SA

En Bas-le-Port 1

CH-2088 Cressier

E-Mail contact@simpex.ch

Internet www.simpex.ch