

CCU40A403WN0UX

outdoor

&gt; CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

| Technical data          |                          |                           |
|-------------------------|--------------------------|---------------------------|
| APPROVALS               |                          |                           |
| Approvals               | CE; UKCA                 |                           |
| PERFORMANCE             |                          |                           |
| Cooling Capacity L35L35 | 3995/4195<br>13632/14314 | W<br>BTU/h                |
| Cooling Capacity L35L50 | 2995/3145<br>10219/10731 | W<br>BTU/h                |
| ELECTRICAL DATA         |                          |                           |
| Rated Voltage           | 380/400                  | V a.c. 3 ~ at 50 Hz       |
| Rated Voltage           | 440/460/480              | V a.c. 3 ~ at 60 Hz       |
| Rated Current           | 3.5                      | A at 380 V a.c. 3 ~ 50 Hz |
| Rated Current           | 3.3                      | A at 400 V a.c. 3 ~ 50 Hz |
| Rated Current           | 3.4                      | A at 440 V a.c. 3 ~ 60 Hz |
| Rated Current           | 3.3                      | A at 460 V a.c. 3 ~ 60 Hz |
| Rated Current           | 3.1                      | A at 480 V a.c. 3 ~ 60 Hz |
| Rated Power L35L35      | 1845/2045                | W                         |
| Rated Power L35L50      | 2165/2545                | W                         |
| Frequency               | 50/60                    | Hz                        |
| Max Current             | 15                       | A                         |
| Fuse T                  | 8                        | A                         |
| GENERIC DATA            |                          |                           |
| Casing Material         | Painted Steel            |                           |

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU40A403WN0UX

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

| Technical data                     |               |     |
|------------------------------------|---------------|-----|
| RAL Number                         | 7035          |     |
| Electrical Connection              | Connector     |     |
| Refrigerant Number                 | R513A         |     |
| Refrigerant Charge                 | 910           | g   |
| Maximum Allowable Pressure         | HP 2.4/LP 0.6 | MPa |
| ENVIRONMENTAL AND THERMAL DATA     |               |     |
| Protection Degree Internal Circuit | IP55          |     |
| Operating Temperature              | -20÷50        | °C  |
|                                    | -4÷122        | °F  |

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU40A403WNOUX

outdoor

> CONTATTACI

CLIMATE CONTROL SYSTEMS

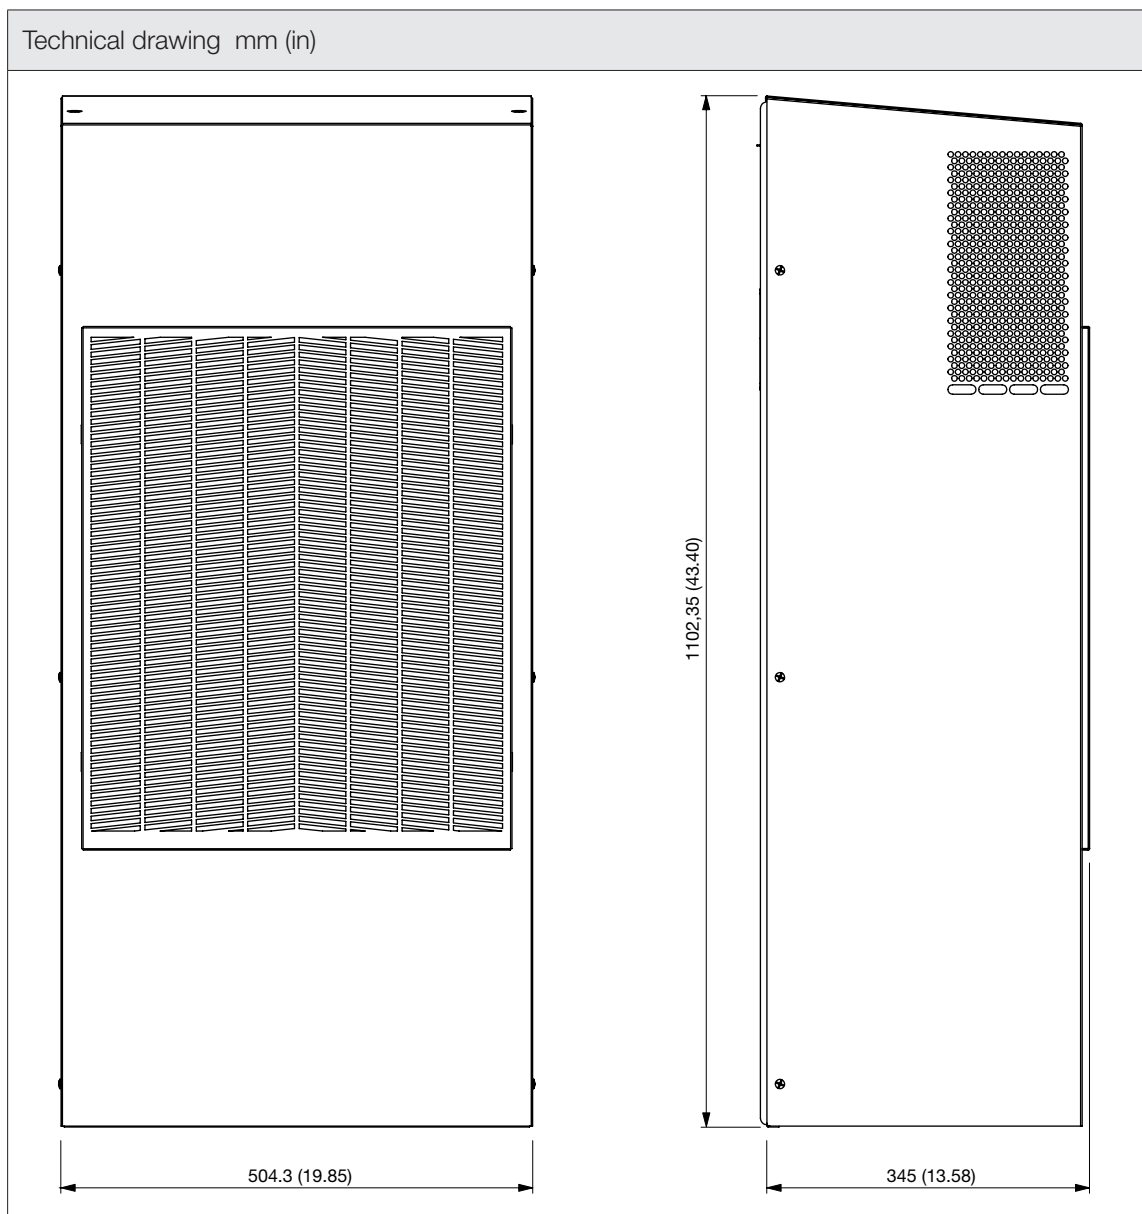



Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

CCU40A403WNOUX

outdoor

> CONTATTACI

Cooling Capacity vs Temperature

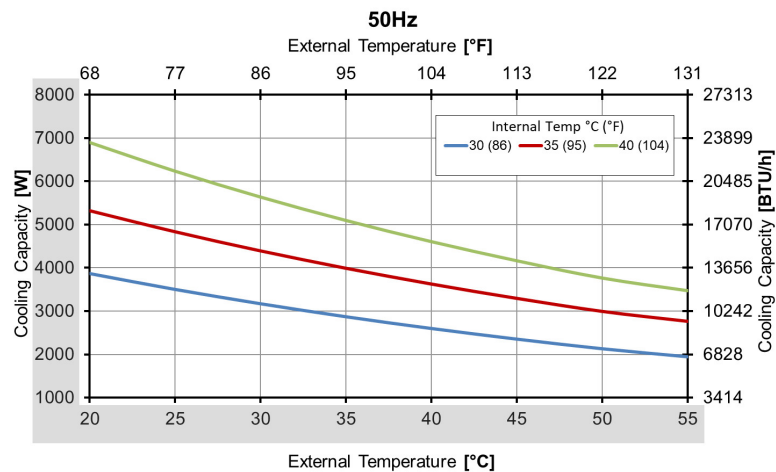

Cooling Capacity vs Temperature

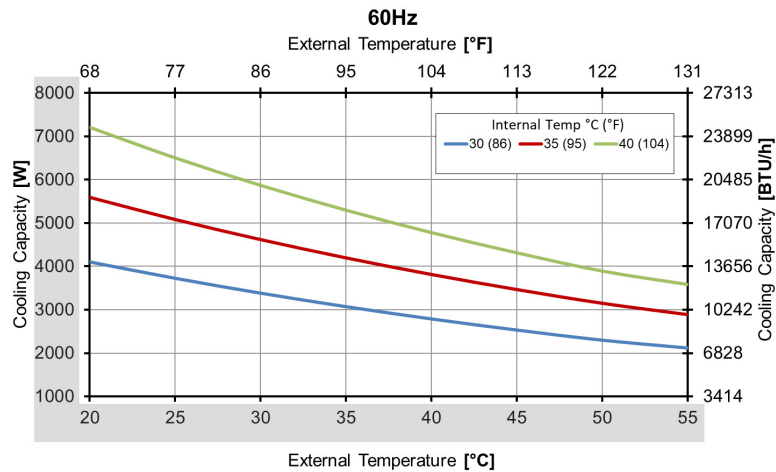


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities cla

 [www.simpex.ch](http://www.simpex.ch)

Besuchen Sie unseren Simpex E-Shop  
mit über 12'000 Produkten.

Er bietet Ihnen eine breite Funktionsvielfalt, sowie intelligente  
Suchfunktionen. Ob Sie den Shop als Einkaufsplattform oder als  
Produktfinder nutzen – im Simpex E-Shop haben Sie alle Infor-  
mationen schnell und tagesaktuell zur Hand.

24h und das 365 Tage im Jahr.



## Hauptsitz

### **Simpex Electronic AG**

Binzackerstrasse 33

CH-8620 Wetzikon

Telefon +41 44 931 10 10

E-Mail [contact@simpex.ch](mailto:contact@simpex.ch)

Internet [www.simpex.ch](http://www.simpex.ch)

## Manufaktur

### **Simpex Electronic SA**

En Bas-le-Port 1

CH-2088 Cressier

E-Mail [contact@simpex.ch](mailto:contact@simpex.ch)

Internet [www.simpex.ch](http://www.simpex.ch)