


Current Transducer LA 35-NP

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$I_{PN} = 7, 8, 11, 17, 35 \text{ At}$



Electrical data

I_{PN}	Primary nominal RMS current	35	At
I_{PM}	Primary current, measuring range	0 ... ± 70	At
R_M	Measuring resistance with $\pm 15 \text{ V}$	$R_{M \min}$ $R_{M \max}$	Ω
	@ $\pm 35 \text{ At}_{\max}$	60 150	Ω
	@ $\pm 70 \text{ At}_{\max}$	60 85	Ω
I_{SN}	Secondary nominal RMS current	35	mA
N_P/N_S	Turns ratio	1-2-3-4-5 : 1000	
U_C	Supply voltage ($\pm 5 \%$)	± 15	V
I_C	Current consumption	$10 + I_S$	mA

Accuracy - Dynamic performance data

ϵ_{tot}	Accuracy @ $I_{PN}, T_A = 25 \text{ }^\circ\text{C}$ without electrical offset I_O	± 0.5	%
ϵ_L	Linearity error	< 0.2	%
I_O	Offset current ¹⁾ @ $I_P = 0, T_A = 25 \text{ }^\circ\text{C}$	Typ ± 0.10 Max ± 0.20	mA
I_{OM}	Magnetic offset current ²⁾ @ $I_P = 0$ and specified R_M , after an overload of $3 \times I_{PN}$	± 0.05 ± 0.15	mA
I_{OT}	Temperature variation of I_O -25 $^\circ\text{C}$... +70 $^\circ\text{C}$	± 0.15 ± 0.05	mA
t_{D90}	Delay time to 90 % of the final output value for I_{PN} step ³⁾ < 1		μs
BW	Frequency bandwidth (-1 dB)	DC ... 150	kHz

General data

T_A	Ambient operating temperature	-25 ... +70	$^\circ\text{C}$
T_{Ast}	Ambient storage temperature	-40 ... +85	$^\circ\text{C}$
R_P	Resistance of primary (winding) @ $T_A = 25 \text{ }^\circ\text{C}$	< 1.25	m Ω
R_S	Resistance of secondary winding @ $T_A = 70 \text{ }^\circ\text{C}$	80	Ω
R_{INS}	Insulation resistance @ 500 V, $T_A = 25 \text{ }^\circ\text{C}$	> 1500	M Ω
m	Mass Standard	22	g
		EN 50178: 1997	

Notes: ¹⁾ Measurement carried out after 15 mn functioning
²⁾ The result of the coercive field of the magnetic circuit
³⁾ For a $di/dt = 50 \text{ A}/\mu\text{s}$.

Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Current Transducer LA 35-NP

Insulation coordination

U_d	RMS voltage for AC insulation test, 50 Hz, 1 min	2.5	kV
U_{Ni}	Impulse withstand voltage 1.2/50 μ s	9	kV
		Min	
d_{Cp}	Creepage distance	10.63	mm
d_{Cl}	Clearance	10.63	mm
CTI	Comparative tracking index (group IIIa)	175	

Applications examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
d_{Cp}, d_{Cl}, U_{Ni}	Rated insulation voltage	Nominal voltage
Basic insulation	1000 V	1000 V
Reinforced insulation	500 V	300 V

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Dimensions LA 35-NP (in mm)

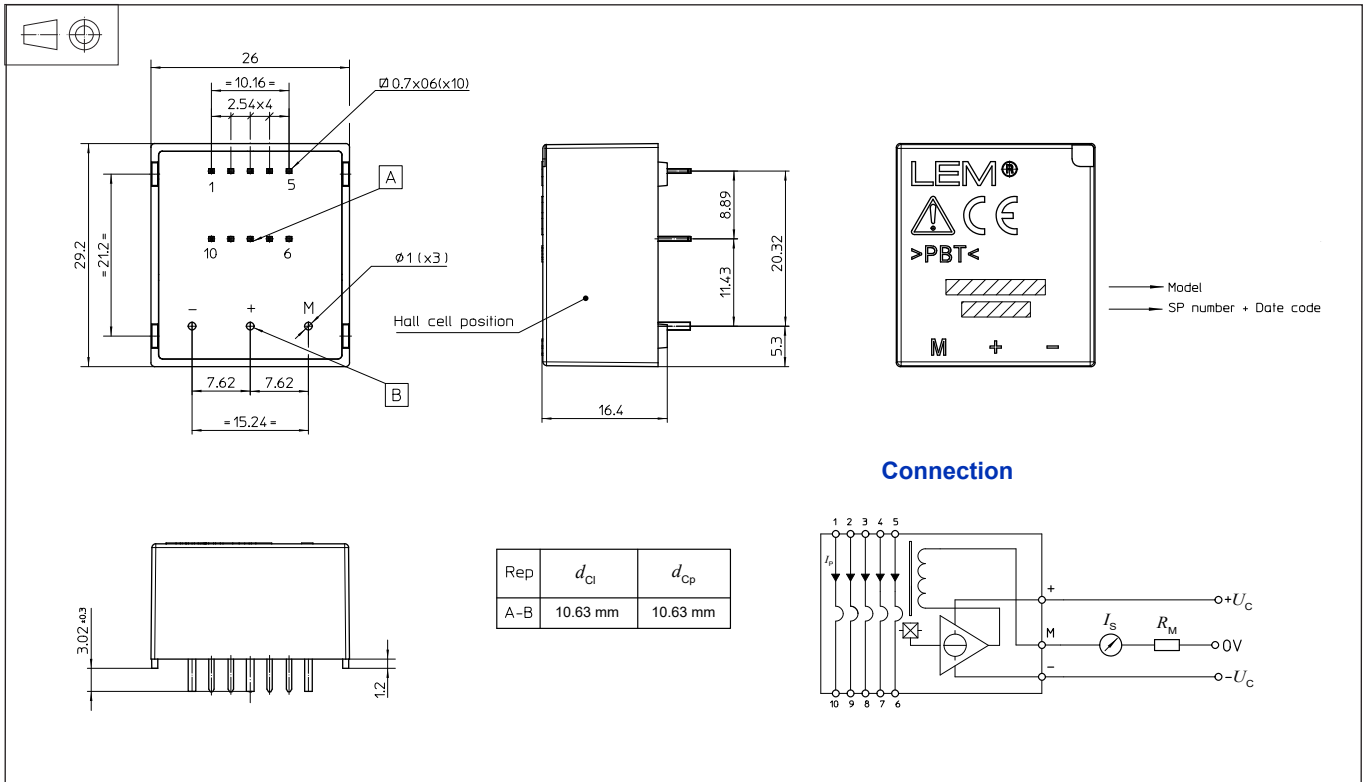

Number of primary turns	Primary current		Nominal output current $I_{S N}$ [mA]	Turns ratio N_p/N_s	Primary resistance R_p [m Ω]	Primary insertion inductance L_p [μ H]	Recommended connections
	nominal $I_{P N}$ [A]	maximum I_p [A]					
1	35	70	35	1 / 1000	0.3	0.023	
2	17	34	34	2 / 1000	1.1	0.09	
3	11	22	33	3 / 1000	2.5	0.21	
4	8	16	32	4 / 1000	4.4	0.37	
5	7	14	35	5 / 1000	6.3	0.58	

Mechanical characteristics

- General tolerance ± 0.2 mm
- Fastening & connection of primary 10 pins 0.7×0.6 mm
- Fastening & connection of secondary 3 pins $\varnothing 1$ mm
- Recommended PCB hole 1.2 mm

Remarks

- I_S is positive when I_p flows from terminals 1, 2, 3, 4, 5 to terminals 10, 9, 8, 7, 6.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

 www.simpex.ch

Besuchen Sie unseren Simpex E-Shop mit über 12'000 Produkten.

Er bietet Ihnen eine breite Funktionsvielfalt, sowie intelligente Suchfunktionen. Ob Sie den Shop als Einkaufsplattform oder als Produktfinder nutzen – im Simpex E-Shop haben Sie alle Informationen schnell und tagesaktuell zur Hand.

24h und das 365 Tage im Jahr.



Hauptsitz

Simpex Electronic AG
Binzackerstrasse 33
CH-8620 Wetzikon
Telefon +41 44 931 10 10
E-Mail contact@simpex.ch
Internet www.simpex.ch

Manufaktur

Simpex Electronic SA
En Bas-le-Port 1
CH-2088 Cressier
E-Mail contact@simpex.ch
Internet www.simpex.ch