

Current Transducer LAH 100-P

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$$I_{PN} = 100 \text{ A}$$



Electrical data

I_{PN}	Primary nominal RMS current	100	A		
I_{PM}	Primary current, measuring range ¹⁾	0 ... ±160	A		
R_M	Measuring resistance @	$T_A = 70 \text{ °C}$	$T_A = 85 \text{ °C}$		
				$R_{M \min}$ $R_{M \max}$	$R_{M \min}$ $R_{M \max}$
		with ±12 V	@ I_{PN} [±A DC]	0 63	0 57 Ω
			@ I_{PN} [A RMS] ²⁾	0 11	0 5 Ω
		with ±15 V	@ I_{PN} [±A DC]	20 120	45 114 Ω
	@ I_{PN} [A RMS] ²⁾	20 51	45 45 Ω		
	@ $I_P < I_{PN}$ ³⁾				
I_{SN}	Secondary nominal RMS current	50	mA		
N_P/N_S	Turns ratio	1 : 2000			
U_C	Supply voltage (±5 %)	±12 ... 15	V		
I_C	Current consumption	10 (@ ±15 V) + I_S	mA		

Accuracy - Dynamic performance data

ϵ_{tot}	Total error ⁴⁾ @ I_{PN} , $T_A = 25 \text{ °C}$	±0.25	%
ϵ_L	Linearity error	< 0.15	%
		Typ	Max
I_O	Offset current referred to primary @ $T_A = 25 \text{ °C}$		±300 mA
I_O	Offset current referred to secondary @ $T_A = 25 \text{ °C}$		±0.15 mA
I_{OM}	Magnetic offset current @ $I_P = 0$, referred to secondary and specified R_M , after an overload of $5 \times I_{PN}$	±0.10	±0.15 mA
I_{OT}	Temperature variation of I_O , referred to secondary	0 °C ... +70 °C	±0.10 ±0.40 mA
		-25 °C ... +85 °C	±0.10 ±0.50 mA
t_{D10}	Delay time to 10 % of the final output value for I_{PN} step ⁵⁾	< 200	ns
t_{D90}	Delay time to 90 % of the final output value for I_{PN} step ⁵⁾	< 500	ns
BW	Frequency bandwidth (-1 dB)	DC ... 200	kHz

General data

T_A	Ambient operating temperature	-25 ... +85	°C
T_{Ast}	Ambient storage temperature	-40 ... +90	°C
R_S	Resistance of secondary winding	@ $T_A = 70 \text{ °C}$	115 Ω
		@ $T_A = 85 \text{ °C}$	121 Ω
m	Mass	24	g
	Standard	EN 50178: 1997	

Notes: ¹⁾ For 10 s, with $R_M \leq 25 \text{ } \Omega$ ($U_C = \pm 15 \text{ V}$)

²⁾ 50 Hz Sinusoidal

³⁾ The measuring resistance $R_{M \min}$ may be lower (see "LAH Technical Information" leaflet)

⁴⁾ Without I_O & I_{OM}

⁵⁾ For a $di/dt = 200 \text{ A}/\mu\text{s}$.

N° 97.34.34.000.0

Features

- Closed loop (compensated) current transducer using the Hall effect
- Printed circuit board mounting
- Insulating plastic case recognized according to UL 94-V0.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized delay time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Current Transducer LAH 100-P

Isolation characteristics

U_d	RMS voltage for AC insulation test, 50/60 Hz, 1 min	5	kV
U_{Ni}	Impulse withstand voltage 1.2/50 μ s	12	kV
U_t	Partial discharge RMS test voltage ($q_m < 10$ pC)	> 2	kV
		Min	
d_{Cp}	Creepage distance ¹⁾	11.75	mm
d_{Cl}	Clearance ¹⁾	11.75	mm
CTI	Comparative tracking index (group IIIa)	175	

Note: ¹⁾ On PCB with soldering pattern UTEC93-703.

Applications examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
d_{Cp}, d_{Cl}, U_{Ni}	Rated insulation voltage	Nominal voltage
Basic insulation	1000 V	1000 V
Reinforced insulation	500 V	500 V

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.




Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.

Main supply must be able to be disconnected. Main supply must be able to be disconnected.

Dimensions LAH 100-P (in mm)

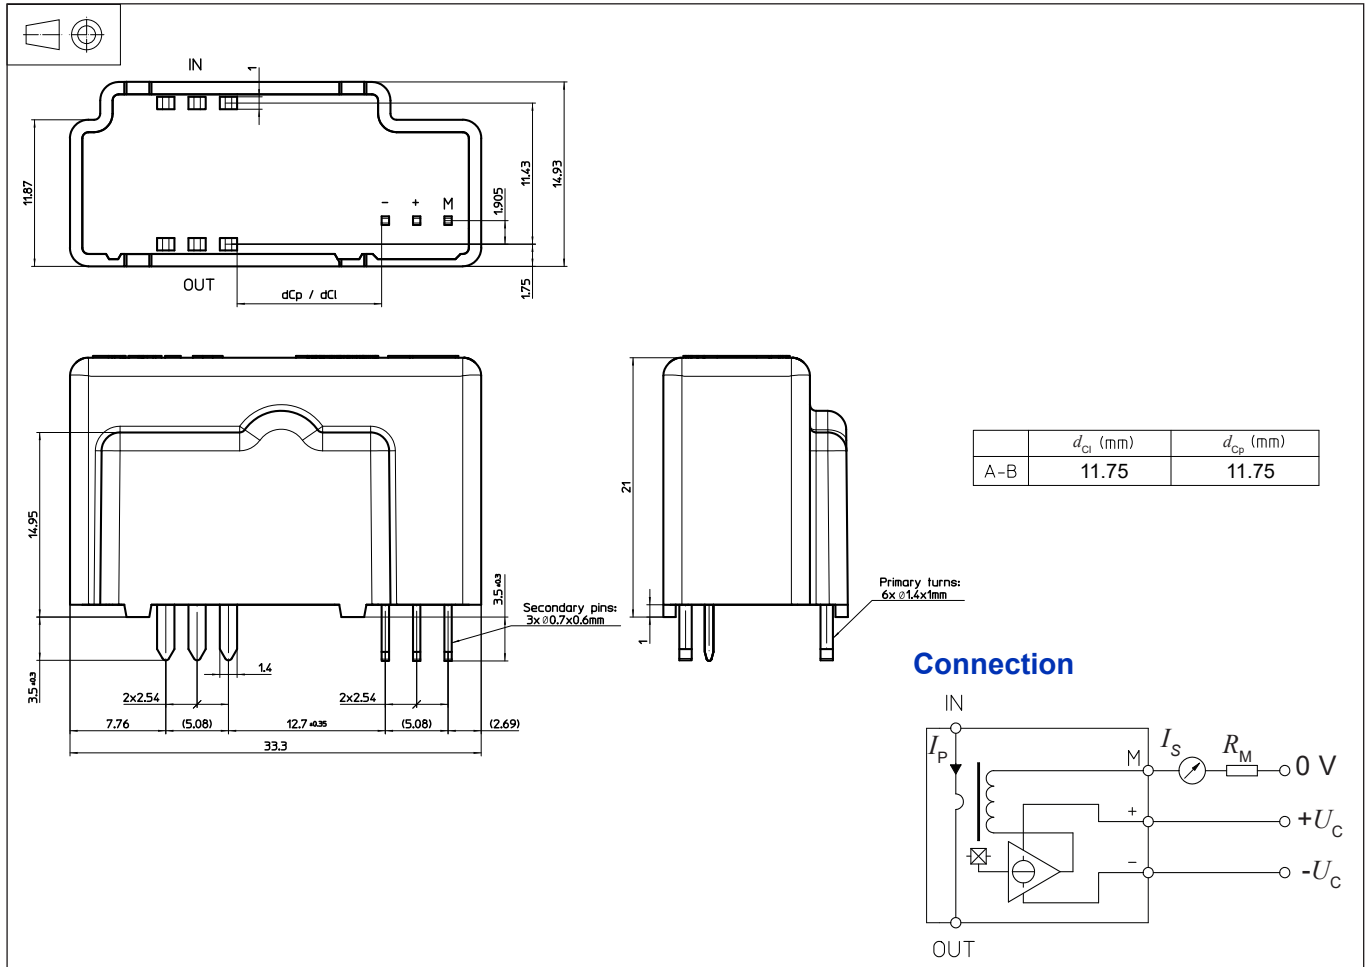

Number of primary turns	Primary current		Nominal output current I_{SN} [mA]	Turns ratio N_P/N_S	Primary resistance R_P [mΩ]	Primary insertion inductance L_P [μH]
	nominal I_{PN} [A]	maximum I_P [A]				
1	100	160	50	1 : 2000	0.08	0.007

Mechanical characteristics

- General tolerance: ± 0.2 mm
- Fastening & connection of primary: 6 pins 1.4 x 1 mm
Recommended PCB hole: 2 mm
- Fastening & connection of secondary: 3 pins 0.7 x 0.6 mm
Recommended PCB hole: 1.2 mm

Remarks

- I_S is positive when I_P flows from terminals "IN" to terminals "OUT".
- The jumper temperature and PCB should not exceed 100 °C.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

 www.simpex.ch

Besuchen Sie unseren Simpex E-Shop mit über 12'000 Produkten.

Er bietet Ihnen eine breite Funktionsvielfalt, sowie intelligente Suchfunktionen. Ob Sie den Shop als Einkaufsplattform oder als Produktfinder nutzen – im Simpex E-Shop haben Sie alle Informationen schnell und tagesaktuell zur Hand.

24h und das 365 Tage im Jahr.



Hauptsitz

Simpex Electronic AG
Binzackerstrasse 33
CH-8620 Wetzikon
Telefon +41 44 931 10 10
E-Mail contact@simpex.ch
Internet www.simpex.ch

Manufaktur

Simpex Electronic SA
En Bas-le-Port 1
CH-2088 Cressier
E-Mail contact@simpex.ch
Internet www.simpex.ch